



CCTV KIT Package Including:

- 2pcs Plastic Full Color Night Vision Bullet Camera;
- 2pcs Plastic Full Color Night Vision Dome Camera;
- 1pcs 4 POE Ports NVR(Support 10CH*4K Input);
- 4 Rolls 18.3 Meters RJ45 Cable;
- Power Supply DC 52V 1.25A;
- USB Mouse;

CCTV KIT:Camera Specification:

Model	IPC-XMT-903/IPC-XMT-965
System structure	Embedded RTOS,Dual-core 32bit DSP(GK7205V210),pure hard compression,watch dog
Sensor	4.0M 1/2.9" MIS2009 Low light illumination CMOS sensor,color 0.01Lux/F1.2,black/white 0.001Lux/F1.2
Video compression	H.265A/H.265+ (Compatible with H.265/H.264),support dual stream,AVI;0.1M~8Mbps variable;1~30f/s variable
Image output	Main stream:4MP=2560*1440@20fps,3MP=2304*1296@20fps,2MP=1920*1080@25fps; Sub-stream: 800*448@25fps
Shutter	1/50(1/60)s to 1/10,000s
Lens	Built-in 5MP 3.6mm Starlight Fixed Lens
IR LED	2pcs Array IR + 2pcs White Light LED
IR Distance	IR Effective Distance 30Meters,Full Color Night Vision 15 Meters
Day and night	Support IR-CUT
Noise reduction	Support 2D/3D
Wide dynamic	Support Digital Wide Dynamic Range 120dB
Audio compression	G.711,support bidirectional talk,audio&video synchronization
Audio interface	Built-in Microphone,Speaker Ports on Cable(Optional)
Network interface	1*RJ45 10/100M adaptive Ethernet port; Support HTTP/RTSP/DHCP/NTP/ONVIF/P2P/UPnP etc
Signal interface	One photo resistance interface,one IR-CUT interface ,support photo resistance signal and IR-CUT links to IR
Expansion interface	Support Expansion interface WiFi & SD Card
Reliability	Comprehensive lightning protection, 7 * 24 hours -10℃~65℃high

	temperature stable and reliable testing
Intelligence analysis	Supporting human detection and tripping line detection, and supports intelligent functions such as customized face detection, number statistics, etc.
Other function	Support WEB,OSD, live video transmission, motion detect and IO alarm, front-end storage/playback/download, and center reminder and image linkage, support JPEG capture; united remote client monitoring software、MYEYE; perfect SDK;
ONVIF	Support 2.42
POE	POE 48V:IEEE802.3AF/AT International Standard
Mobile monitoring	Support Multiple Mobile Monitoring(IOS,Android)
Application	Outdoor(Weatherproof IP66 Standard)
Working Temp.	-30 ° C ~ +65 ° C
Power	DC12V/2A or POE 48V input
Power Consumption	≤10W
Package Dimension	19*10*10CM/9*10*10CM
Weight	0.7kgs/0.5kgs

CCTV KIT POE NVR Specification:

	Model	PNVR-8184
System	Operating System	Embedded Linux
	System resources	Simultaneous multi-channel real-time recording, playback, network operation, USB backup
Interface	Operator interface	16-bit true color graphic menu operation interface, support mouse operation
	Preview	1/2/4/6/9/10
Video	Video input (IP)	10*4K

	Video compression	H.265AI/H.265+(compatible H.265/H.264)
	Display quality	Max:4K
	Playback quality	4K/5M/4M/3M/1080P
	Decode	4K (1) /5M (1+1) /4M(2)/3M (2+2) /1080P (4+1)
	VR	Unsupport
	human shape / Face	Support(depend on camera)
Audio	Audio compression	G.711A
	Intercom	support
Record & playback	Recording mode	Manual>Alarm>Dynamic Detection>Timing
	Local playback	4K (1) /5M (1+1) /4M(2+1)/3M (2+2) /1080P (4+1)
	Search mode	Search by Time/Calendar/Event/Channel/Face
	Record storage	HDD 、 Network 、 Cloud
	Backup mode	Network backup, USB hard disk, USB burner, SATA burner
External interface	Video output	1ch VGA , 1ch HDMI HD output
	Audio I/O	1/1 (3.5mm)
	Alarm I/O	0/0
	Network interface	1*RJ45 10M/100M Adaptive Ethernet port
	USB interface	2*USB2.0 ports(one USB extension interface is reserved)
	HDD	1* SATA(Up to 14TB for each disk)
	ESATA	No
	Serial interface	No
Other	ONVIF	Support
	Power supply	DC 52V 1.25A
	Power Consumption	<10W(Without HDD)
	Work environment	Temperature:0℃ —55℃ , Humidity:10%—90%RH , Atm:86kpa—106kp
	Dimension	254mm(L)* 215mm(W)* 42mm(H)

	Weight	A total of about 2.0kg
--	--------	------------------------

CCTV KIT Installation note:

- (1) Do not use this product falls on the ground or the strong tapping;
- (2) Unless the instructions, otherwise do not disassemble the machine itself;
- (3) Before use, please determine whether the power supply DC 12V or POE 48V for the specified voltage;
- (4) Aim to avoid strong light (such as sunlight, lighting, etc), otherwise easy to cause a bright or light phenomenon (this is not a fault), will also affect the Chipset life;
- (5) Avoid in damp, dusty, hot, cold, strong electromagnetic radiation, etc;
- (6) If found abnormal situation, please unplug the power and contact us;
- (7) Lightning protection earth wire should be grounded to the nearest.

CCTV KIT Installation and operating instructions:

- (1) Make sure the power supply voltage is correct: DC 12V or POE 48V, inside outside is negative.
- (2) Using CAT5/6 cable to transmit video signal to the monitoring equipment.
- (3) Choose the right place.

WELCOME OEM/ODM

Logo print

All the Camera/DVR/NVR
we could silk print logo for you
In different color




Lable

You can offer your Brand and your
model.
We could design according to your
requirement
No MOQ, No extra Charge

User Manual

If you want your language's manual
Please help us translate and we should
print it for you

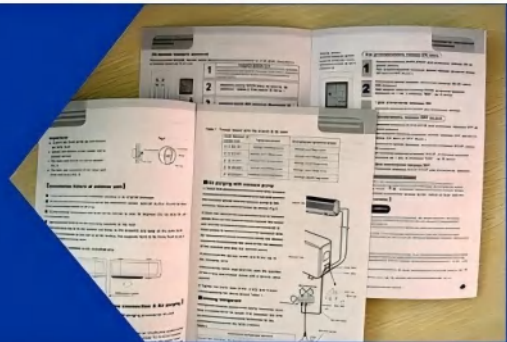



Packing Box

You can offer your Brand and your requirement
We could customer-made box for you

Packing Carton

You can offer your Brand and your requirement
We could customer-made Carton for you



Housing/IR Led/Lens

At present we have hundred housing for your choice. We also welcome ODM housing.
About Led . you can choose IR led/Crystal IR led/Laser led ect. And Lens from fixed 3.6mm/6mm/8mm/12mm to Varifocal lens 2.8-12mm/3.6-10mm/6-22mm 5-15mm/5-50mm for your choice .

SHIPPING WAY



By Air



By Sea

DHL

中外运敦豪



aramex
delivery unlimited



FedEx
Express

EMS

Payment:

T/T ESCROW PayPal

**WESTERN
UNION**
1951 RELIABLE. WORLDWIDE MONEY TRANSFER


MoneyGram