

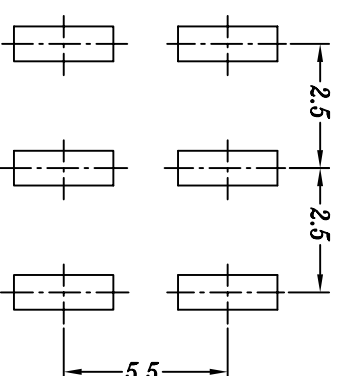



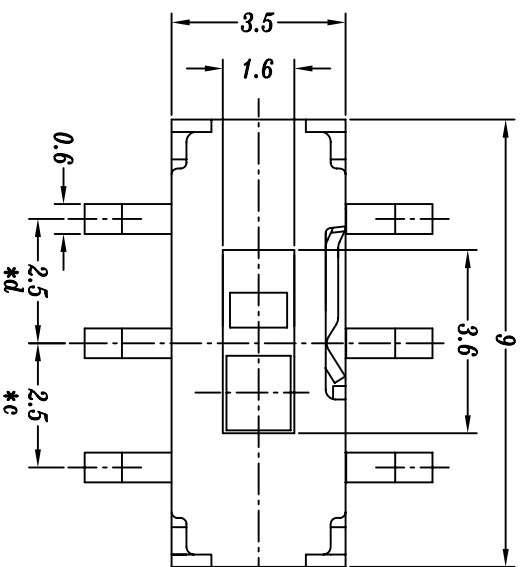


P.C.B LAYOUT



SPECIFICATION

1. Rating: DC 12V 0.3A
2. Travel: 2 mm
3. Function: 2P2T
4. Contact Resistance: $\leq 70\text{m}\Omega_{\text{MAX}}$
5. Operating Force: $130\pm 50\text{gf}$, $200\pm 80\text{gf}$, $300\pm 100\text{gf}$
6. Life test: 10,000 cycles

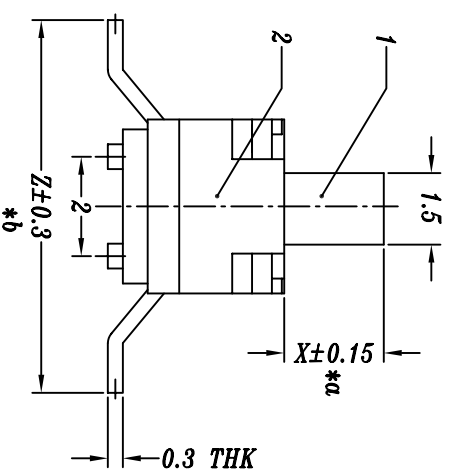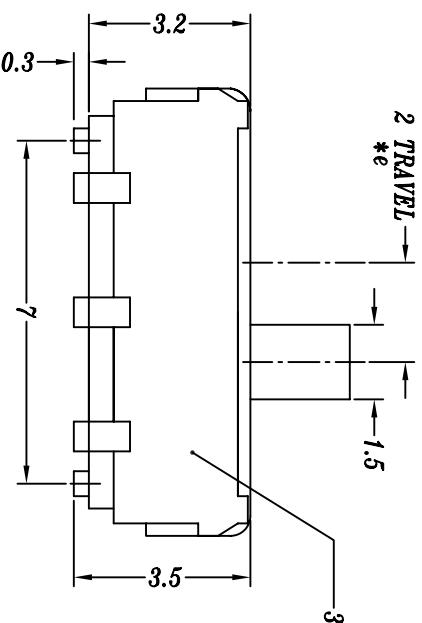

KNOB X=1.5, 2, 2.3, 3, 3.5, 4, 5, 6mm
 TERMINAL Z=5.0 6.9 7.5 10.5mm

					TOLERANCE				A2	2017.09.29	新增胶柄高度规格		PWJ		
					UNLESS SPECIFIED				A1	2017.02.10	新增T6、9规格		GYW		
					UP TO 5mm: ±0.1		ANGULAR	A0	2016.12.30	首次发行		GYW			
					ABOVE 5mm: ±0.2		±1°	NO	DATE	REVISIONS		BY	APPD		
4	MR22D10 SPRING	PBS	2	NATURAL	TITLE:MINI SLIDE SWITCH				UNIT : MM		ROHS	DWN			
3	MS22D17 CASE(MS-22D16)	PA6T/0.3mm BRASS STRIP	1	BLACK/Ag PLATED	MODEL:MS-22D17				SCALE: 6:1		COMPLIANT	CHK'D			
2	MS22D16 COVER	0.15mm SUS	1	WASHING	HAOYU(HONGKONG)LIMITED 皓宇(香港)有限公司									APPD	
1	MS22D16 KNOB	PA6T	1	BLACK										PRO.AGL:	
NO.	PART	NAME	MATERIAL	QTY	FINISHING										