

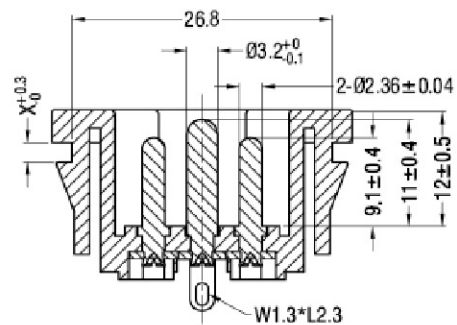
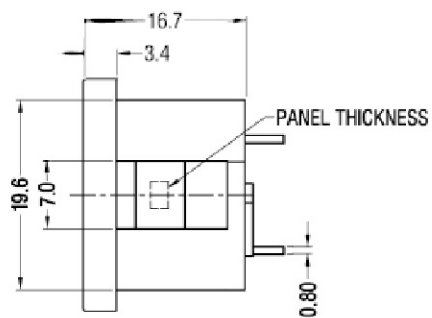


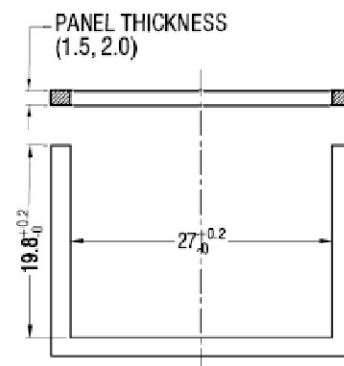

SECTION: A-A



PANEL CUT-OUT

SPEC:

A. Material:

- 1.Housing: PA66
2.Terminal: COPPER ALLOY, TIN PLATED

B. Electrical Characteristics:

- 1.Rating: 2.5A 250V~
- 2.Electric Strength: AC 2,000 V FOR ONE MINUTE
- 3.Insulation Resistance: 100MΩ MIN, AT 500V DC

C.Approvals:

- UL, CUL, CCC, VDE, SEMKO, NEMKO, FIMKO, DEMKO

Part No.	DIM. X
ST-A04-002KSS(1.5)	1.5
ST-A04-002KSS(2.0)	2.0

8					TOLERANCE UNLESS SPECIFIED				
7									
6					WITHIN 1.5:±0.2mm OVER 1.5: ±0.3mm ANGLES: ±2°				
5						ISSUE	DATE	DESCRIPTIONS	APPD.
4					TITLE:AC插座系列			UNIT:mm	DRWG. NO. :
3					MODEL NO: ST-A04-002KSS (X)			SCALE:4:1	DWN YC
2	TERMINAL	BRASS	1	Tin PLATED	DONGGUAN JINBAOLI ELECTRONICS CO.,LTD			CHK' D	
1	HOUSING	PA66	1	BLACK					
NO.	DESCRIPTION	MATERIAL	QTY	PLATING				APPD.	PJ