
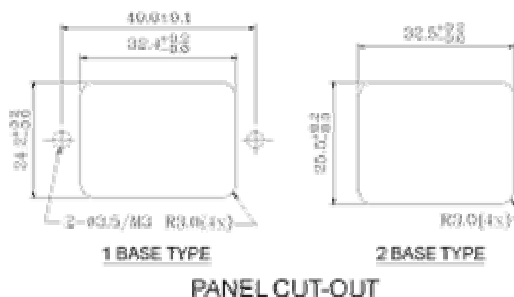


KT SERIES

AC POWER OUTLETS UP TO 15A 250VAC, Snap-in mounting - solder lug or quick connect terminals

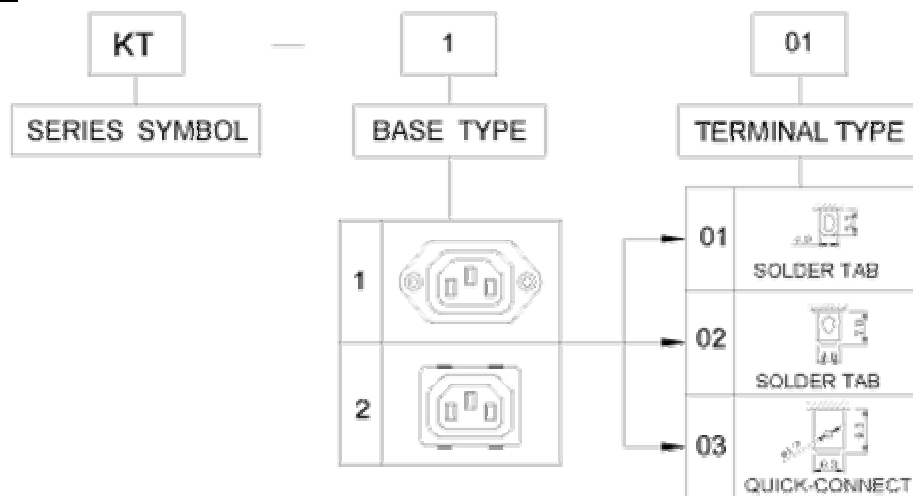

- | 15A 250VAC (UL, CUL)
- | 10A 250VAC (VDE, ENEC)
- | Insulation resistance : 100M Ω (min.), DC 500V
- | Dielectric strength: 2,000VAC for 1 Minute
- | Housing: PA66 UL 94V-0
- | Terminals: Tin-plated brass

How to order**KT-101**