




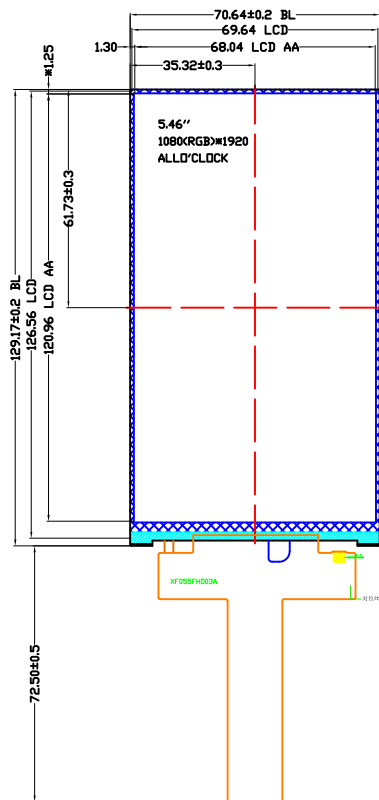

Contact Side Stiffener Side

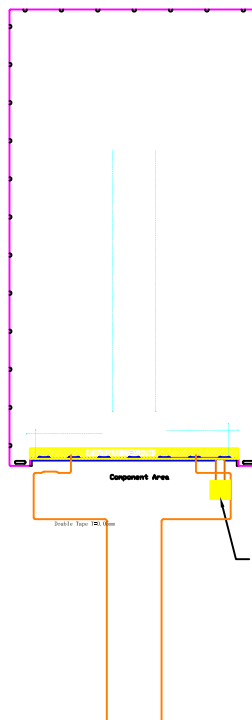


Solder height: 0.5max

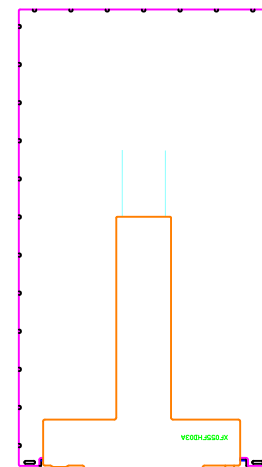

FPC bending diagram

Be careful to avoid the air in the bending area

PIN No.	PIN Name
1	GND
2	MIPI_TDN0
3	MIPI_TDP0
4	GND
5	MIPI_TDN1
6	MIPI_TDP1
7	GND
8	MIPI_TCN
9	MIPI_TCP
10	GND
11	MIPI_TDN2
12	MIPI_TDP2
13	GND
14	MIPI_TDN3
15	MIPI_TDP3
16	GND
17	VDD1.8V
18	VDD2.8V
19	RESET
20	LPTE
21	LCM_ID
22	GND
23	LEDA
24	LEDB
25-30	NC



NOTES:

1. DISPLAY MODE : 5.46" TFT LCD, Transmissive
2. DRIVE IC : ILI7807D OR Equivalent
3. VIEWING DIRECTION : ALL
4. BACKLIGHT: 14 CHIP-WHITE LED, If=20*2mA, 22.4V.
BRIGHTNESS: 350cd/m2
5. OPERATING TEMPERATURE: -20°C TO 70°C
STORAGE TEMPERATURE: -30°C TO 80°C
6. GENERAL TOLERANCE : ±0.20

CONTROL DIMENTION:					
REFERENCE DIMENTION:	()				
APPROVED:	JOBS		MODEL NAME	3rd ANGLE	⊕
CHECKED:	ERIC		PART NAME	UNIT	mm
DESIGNED:	ISSCA		DRAWING NUMBER	SCALE	1:1
			MATERIAL NUMBER	PAGE	1/1