



Category

SWITCH

- PUSH SW

- ROCKER SW

- ANTI-VANDAL SW

- TOUCH KEY SW

- SLIDE SW

- TOGGLE SW

- MICRO/DETECTOR SW

- PRESSURE SW

- ROTARY SW

- DIP SW

- TACT SW

- LIGHTED TACT SW

- KEYLOCK SW

- SAFETY & CONTROL SW

- VEHICLE SW

SOCKET

JACK

INDICATOR

BREAKER

FUSE

FUSE HOLDER

ENCODER

POTENTIOMETER

HARDWARE

WATERPROOF CONNECTOR

WATERPROOF PARTS

New Product

Products Search

Search



OUR PRODUCT

[Home](#) ▶ [Our Product](#) ▶ [RM](#) ▶ [RM](#)

SWITCH / ROCKER SW

RM
RM-210C2N-NBB1

MINI ROCKER SWITCH FITTED WITH ROTATING ARM
ACTUATOR
PLASTIC RING FITTING CUSTOM DESIGN
ACTUATION
Soldering, .187 quick connecting and PCB terminals

PDF Download

Get Information

[Print this page](#)



ZOOM IN

Feature

- 16(4)A, 125/250VAC~T125/55
- SPST, DPST
- Various terminals options, QC, solder and PC terminals



Specification


- Initial contact resistance : 20m ohm (max.)
- Insulation resistance : 100M ohm (min,) at 500VDC
- Dielectric strength : 1,000VAC for 1 minute

- Electrical life : 10,000 cycles



Item

SDec

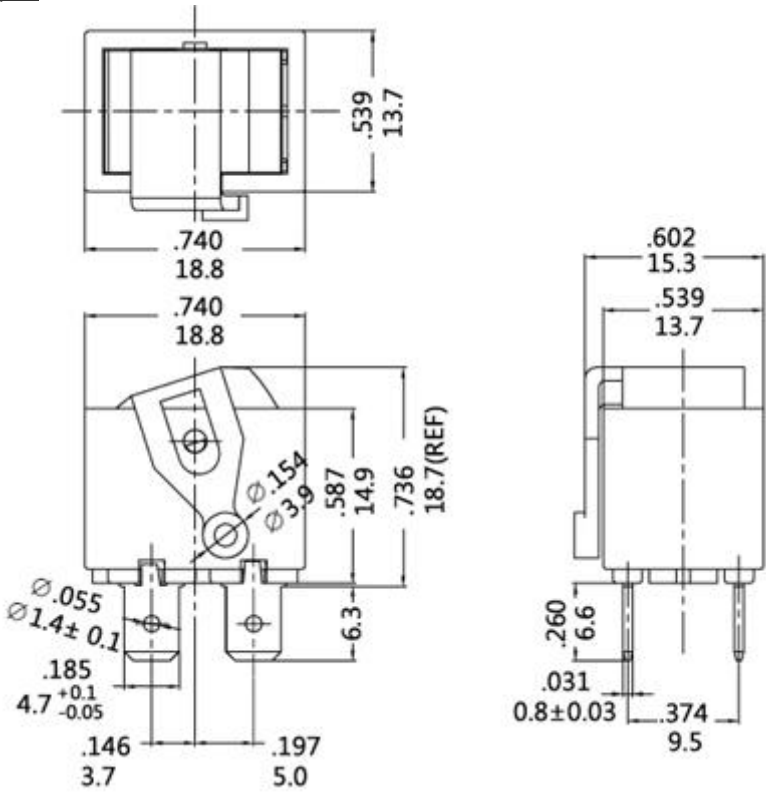

◀ BACK



5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.
Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved