

HSF RoHS CE

SPECIFICATIONS

Rated(額定参数): 300V,8A

Dielectric strength(抗电强度): AC1600V/1 Minute

Insulation Resistance(绝缘电阻):1000M Ω Min

Contact Resistance(接触电阻):20mΩ Max




Temp. range(操作温度): $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

MAX Soldering(瞬时温度):+250°C,5s

Housing Material(塑件): PA66 (UL94 V-0)



Contact(端子): Brass, Tin plating(黄铜镀锡)

PITCH RANGE		NOMINAL DIMENSION RANGE				
IN MM		IN MM				
	OVER	OVER	OVER	OVER	OVER	
TO	6	10	TO	30	60	OVER
TO	10	TO	TO	TO	TO	150
6	10	24	30	60	100	150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70
						±1.00

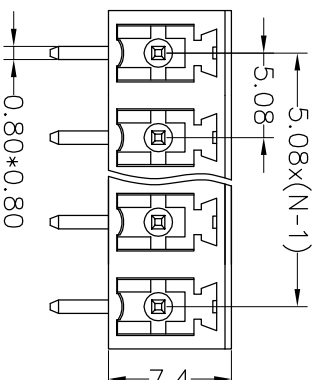


Ordering Information

JL15EDGRC - 508 XX G X 1

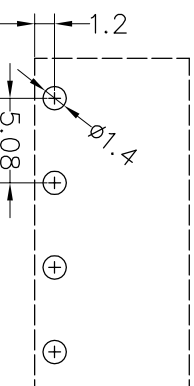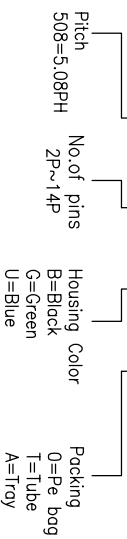

Recommended P.C.B Layout(Top Side)

[illegible]

jiln® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO., LTD.
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.	JL15EDGRC-508XXGX1
----------	--------------------

TITLE:	5.08mm Pitch Male L=12.5mm Pluggable Terminal Blocks
--------	---