

HSF RoHS cAL[®] us CE

SPECIFICATIONS

Rated(额定参数): 300V,8A

Dielectric strength(抗电强度): AC1500V/1 Minute

Insulation Resistance(绝缘电阻):1000MΩ Min

Contact Resistance(接触电阻):20mΩ Max

Screw Torque(扭矩): 0.2Nm (1.7Lb.in)

Wire Range(线径):28~16AWG

Strip length(剥线长度):6~7mm

Temp. range(操作温度): -40℃~+105℃

MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)

Contact(端子): Phosphor Bronze, Tin plating(磷铜镀镍)

Clamp(方块): Brass(黄铜), Ni plating(镀镍)

Screw (螺丝): M2.0/M2.5 Steel, Zinc plating(钢,镀锌)

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO	OVER	OVER	TO	OVER	OVER	OVER	OVER
6	6	10	30	30	60	100	150
10	10	24	30	60	100	150	150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

Ordering Information





JL15EDGKM - 508 XX G X 1

Pitch
508=5.08PH

No.of pins
2P,3P,4P~16P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
O=Pe bag
A=Tray

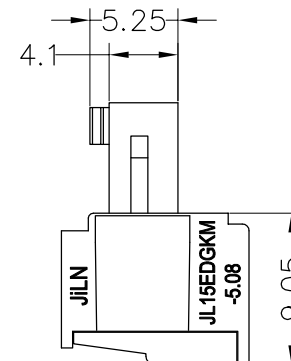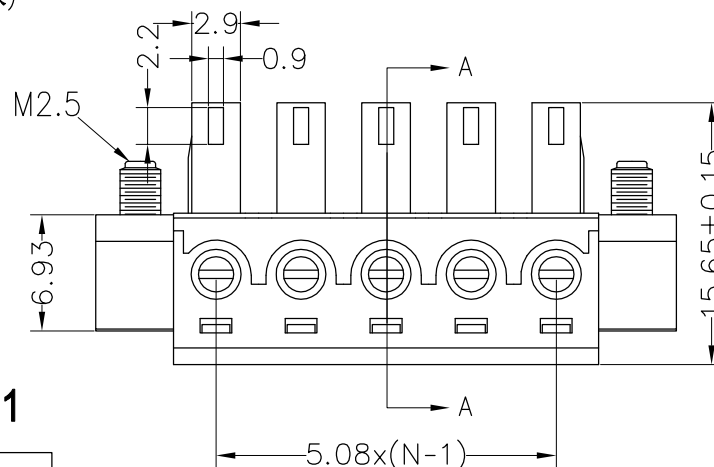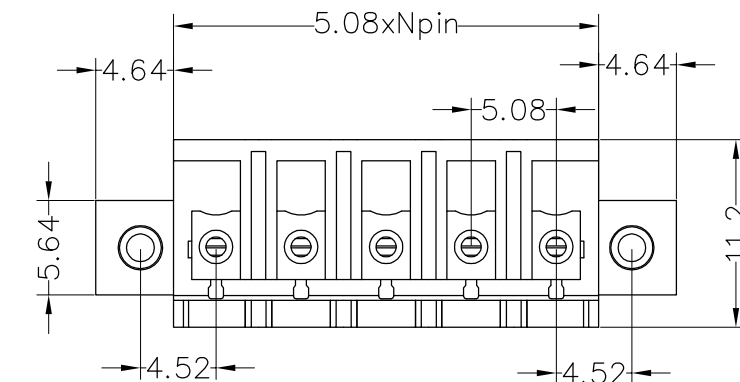

A-A
SECTION

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Yiyusheng

19.06.26

SCALE

FIT

UNIT mm

SIZE A4

SHEET 1/1

PROJ.

JILN[®] 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD

Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.

JL15EDGKM-508XXGX1

TITLE:

5.08 Pitch Female
Pluggable Terminal Blocks