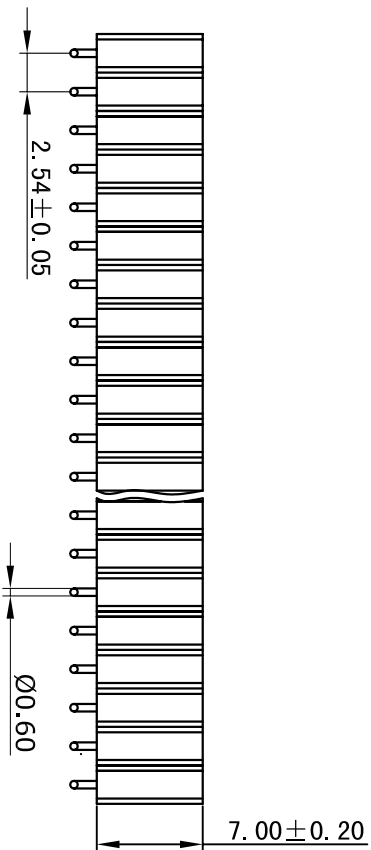
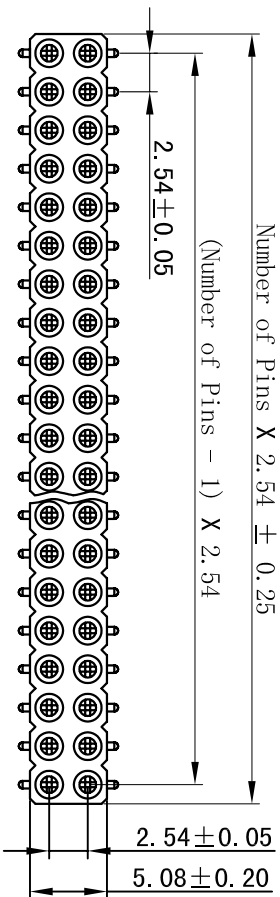


### Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR  
Flammability: UL 94V-O  
Sleeve: Brass  
Contact clip(6 finger): Beryllium copper(C17200)  
Accepted pin: Ø0.70 to 0.90mm,0.635mm  
(polished steel gauge Ø0.76mm)  
Forces: 2 N typ  
--Insertion 1 N typ  
--Withdrawal min500 cycles  
Mechanical life: 3A  
Rated current: max 10mΩ  
Contact resistance: min 1000V RMS  
Dielectric resistance: max 0.1mm(measured on  
Coplanarity SMD 25mm long connectors)  
terminations:

3620-70 XX 2 2 3 M XXX X

|                                        |                                         |                                                          |                                                                                                                            |                                                                                                                             |                                          |                           |                                                      |
|----------------------------------------|-----------------------------------------|----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|------------------------------------------|---------------------------|------------------------------------------------------|
| Plastics<br>Height<br>30=3.0<br>35=3.5 | Number of Pin<br>1 x40Pins<br>2 x40Pins | Insulator Type<br>Code<br>1: Single row<br>2: Double row | Pin Plating code<br>1: Tin 150u"<br>2: Tin 200u"<br>3: Gold Flash<br>4: 2U"Gold<br>5: 3U"Gold<br>6: 10U"Gold<br>S: special | Clip Plating code<br>1: Tin 150u"<br>2: Tin 200u"<br>3: Gold Flash<br>4: 2U"Gold<br>5: 3U"Gold<br>6: 10U"Gold<br>S: special | The Shape<br>Of Pins<br>S:180°<br>R: 90° | Pin<br>length<br>100=10.0 | Insulator<br>color<br>A:Black<br>B: White<br>C: Blue |
|----------------------------------------|-----------------------------------------|----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|------------------------------------------|---------------------------|------------------------------------------------------|

注：此款产品需折弯，PIN针素材需退火处理。

**JIN** (R)

深圳市锦凌电子有限公司  
SHENZHEN JINLING ELECTRONICS CO., LTD  
Tel: 86-755-2997-5818 Fax: 86-755-2997-5588

|                                      |               |                                  |             |
|--------------------------------------|---------------|----------------------------------|-------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCE |               | DRAWING NAME:                    |             |
| X : ±0.3                             | X° : ±5°      | 2.54x7.0双排圆孔IC座 SMT L=10.0 (大孔针) |             |
| X.X : ±0.2                           | X.X° : ±1°    | SIZE : A4                        | SCALE : N:1 |
| X.XX : ±0.1                          | X.XX° : ±0.5° | REV : A                          | UNIT : mm   |
| GRAM: 曾春明                            |               | CHECKED:                         | PROJECT     |
| DATE: 02/23/12                       |               | DATE:                            | APPROVED:   |
|                                      |               |                                  | PAGE 1/1    |