

Solid Core Current Transformer



Specifications

Rated input current from 5A to 400A

0.333V AC output at rated current

Accuracy $\pm 0.2\%$


Epoxy encapsulated housing

Accuracy at 10% to 130% of rated current

1.05 meter twisted-pair lead

ROHS CE UL2808 Compliant

Custom output and other parameters are available

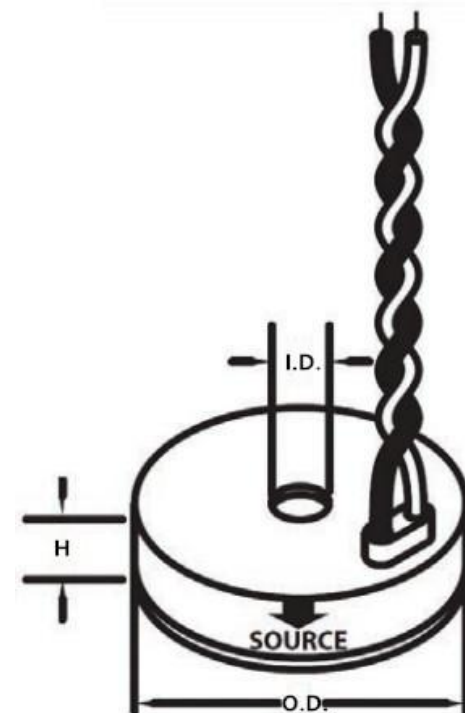

Model	I.D.	Rated Amps	Outside Diameter	Height
BCT-0300	0.76 cm	5, 15, 30, 60	4.32 cm	1.91 cm
BCT-0500	1.27 cm	15, 30, 50, 60, 100	4.83 cm	1.91 cm
BCT-0750	1.91 cm	30, 50, 70, 100, 200	5.33 cm	1.91 cm
BCT-1000	2.54 cm	50, 70, 100, 150, 200, 300	6.10 cm	2.03 cm
BCT-1250	3.18 cm	70, 100, 150, 200, 300, 400, 600	6.86 cm	2.03 cm