

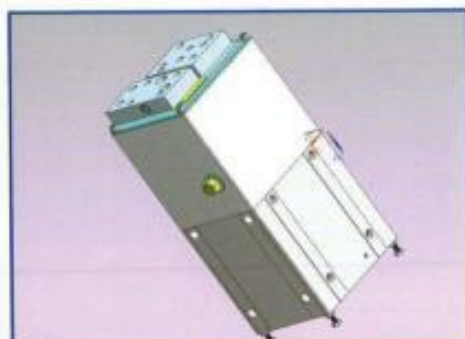
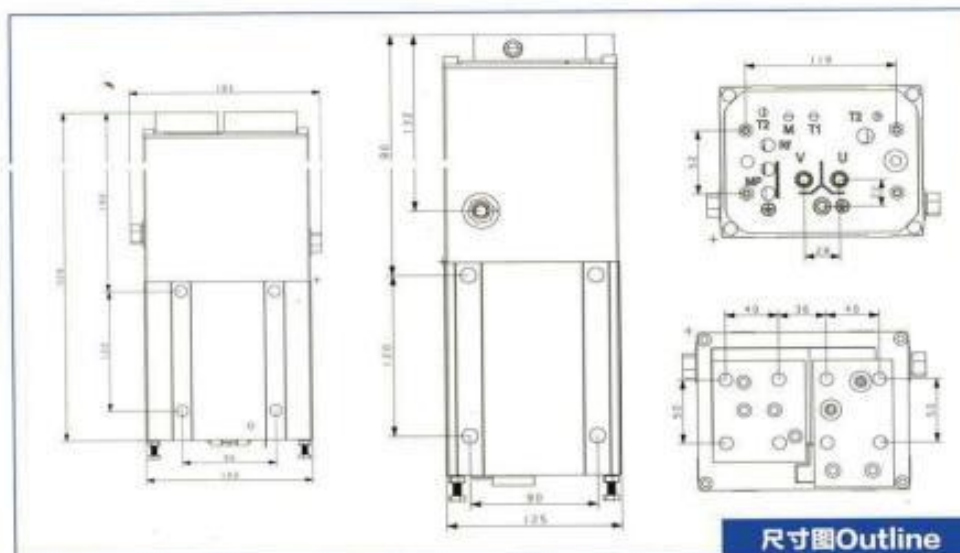
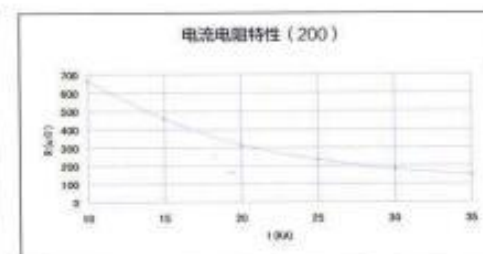


MF220D55JZ01

YZPST.

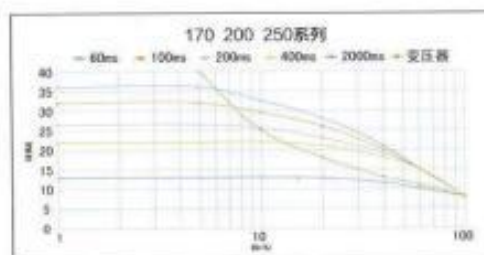

Primary across voltage 初级输入电压: 1100 V _{AC} , 500 V	ED20%, 24 KA; 220 KVA
Secondary no-load voltage 次级空载电压: 4.2 V	ED50%, 14 KA; 120 KVA
Turn ratio 匝比: n=55	ED100%, 10 KA; 92 KVA
Cooling water requirements 冷却水要求: 8L/min, <30℃	Maximum short circuit current 最大短路电流: 40 KA
Insulation grade 绝缘等级: F	Product weight 产品重量: 23 Kg
Standard of execution 执行标准: GB15575-2008	Diode specification 二极管规格: 13500v4

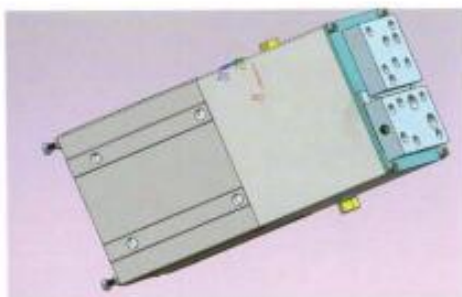

尺寸图Outline