



KW2-4

额定电流、电压

5A 125VAC/250VAC

接触电阻: $\leq 50\text{m}\Omega$

绝缘电阻: $\geq 100\text{M}\Omega$

介电强度: $\geq 1500\text{VAC}/1\text{min}$

电气寿命: ≥ 50000 次

Rating:



5A 125VAC/250VAC

Contact resistance: $\leq 50\text{m}\Omega$

Insulation resistance: $\geq 100\text{M}\Omega$

Dielectric intensity: $\geq 1500\text{VAC}/1\text{min}$

Life: ≥ 50000 Cycles

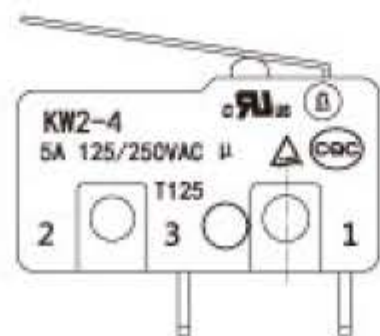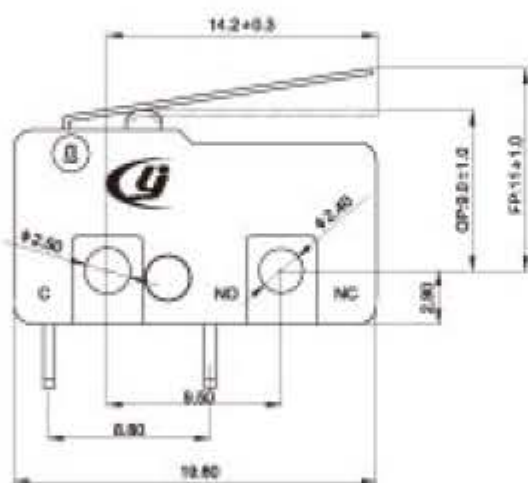

电路图

