


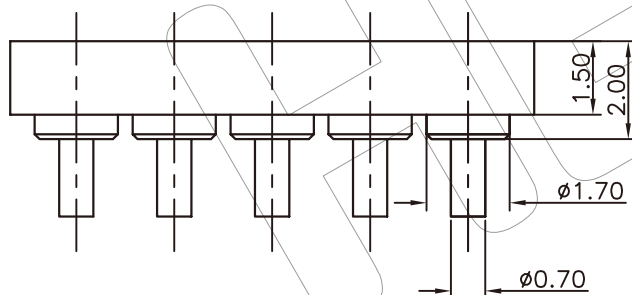


HSF RoHS

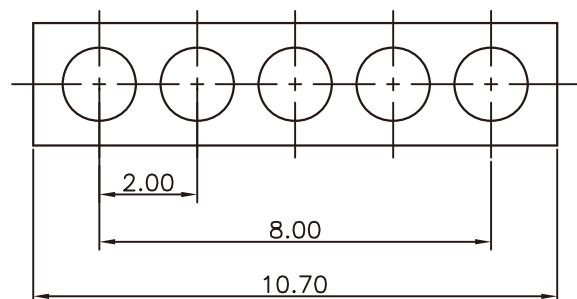

NOTE

- 1.Material  
Plunger: Brass 3604  
Barrel: Brass 3604  
Spring: SUS304  
Housing: PA
- 2.Plating  
Plunger: 1 micro-inch minimum Au over 50~100 micro-inch nickel  
Barrel: 1 micro-inch minimum Au over 50~100 micro-inch nickel
- 3.Electrical  
Rated current & voltage: DC 12V; 2.0A Max.  
Contact resistance: 50 mohm maximum
- 7.RoHS compliant product.

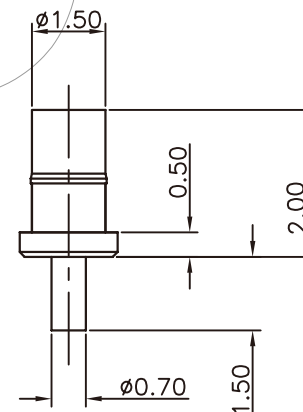

POGO PIN

OPERATION

|       |       |
|-------|-------|
| X.X   | ±0.30 |
| X.XX  | ±0.20 |
| X.XXX | ±0.10 |
| Angle | ±3°   |
| DIM   | TOL   |

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

HECON

东莞市禾康电子有限公司  
DONGGUAN HECON ELECTRONICS CO.,LTD  
<https://www.hecon-cable.com>

PART NO.

HC-PGF2001505NG0S001

TITLE:

5PIN POGO PIN,Female

|     |      |  |                          |        |  |  |  |  |  |
|-----|------|--|--------------------------|--------|--|--|--|--|--|
|     |      |  |                          |        |  |  |  |  |  |
|     |      |  |                          |        |  |  |  |  |  |
|     |      |  |                          |        |  |  |  |  |  |
| A0  |      |  | NEW DRAWING              |        |  |  |  |  |  |
| REV | DATE |  | MODIFICATION DESCRIPTION | CHANGE |  |  |  |  |  |