


UTP CAT6 Patch Cord



Standard

- EIA/TIA-568-C.2
- ISO/IEC 11801
- IEEE802.3af.802.3at

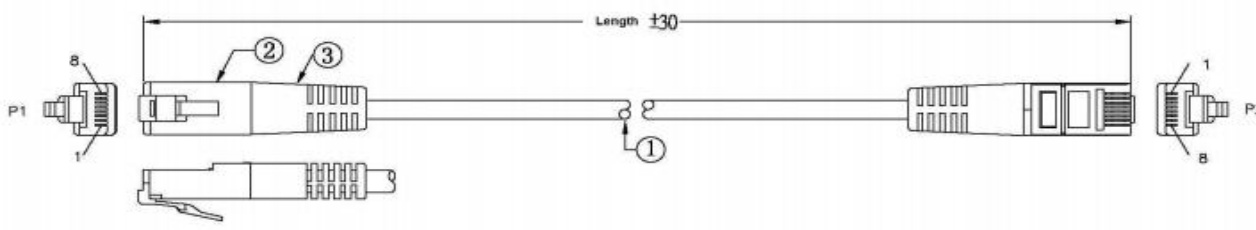

Application

- Cat6A LAN dedicated to structured cabling, which transmits language and data signals, and can be used for network connection between wireless network equipment terminals such as computer, TVs, routers, and TV set-top boxes.
- Suitable for current high bandwidth application and Intelligent solutions.
- Widely applicable to the connections between Switch Patch panel, network keystone jack, modem, router, Computer, Network TV box, television and other RJ45 network socket devices.

Specification

- Inner Conductor: 26AWG BC
- Cable Jacket Color: Customized
- Cable Jacket Material: LSZH/PVC
- Jacket Diameter: 5.9 ± 0.1 mm
- Cable Length: Customized

Electrical Performance(20°C)

- Transfer Rates: 1000 Mbps
- Bandwidth Frequencies: 250Mhz
- Number Of Plug&Unplug: ≥750times