


APPROVED BY:

Ver	Date	Modify Contents
V01	2022.1.20	27823 V4.0版本改结构, FPC出PIN
V02	2022.1.21	更改AA区尺寸
V03	2022.2.8	更改FPC长度
V04	2022.2.16	更改外形尺寸
V05	2022.3.21	更改封口位置和尺寸
V06	2022.4.22	更改背面挡墙和柱子高度
V07	2022.4.25	更改后视图右下角的卡扣位置




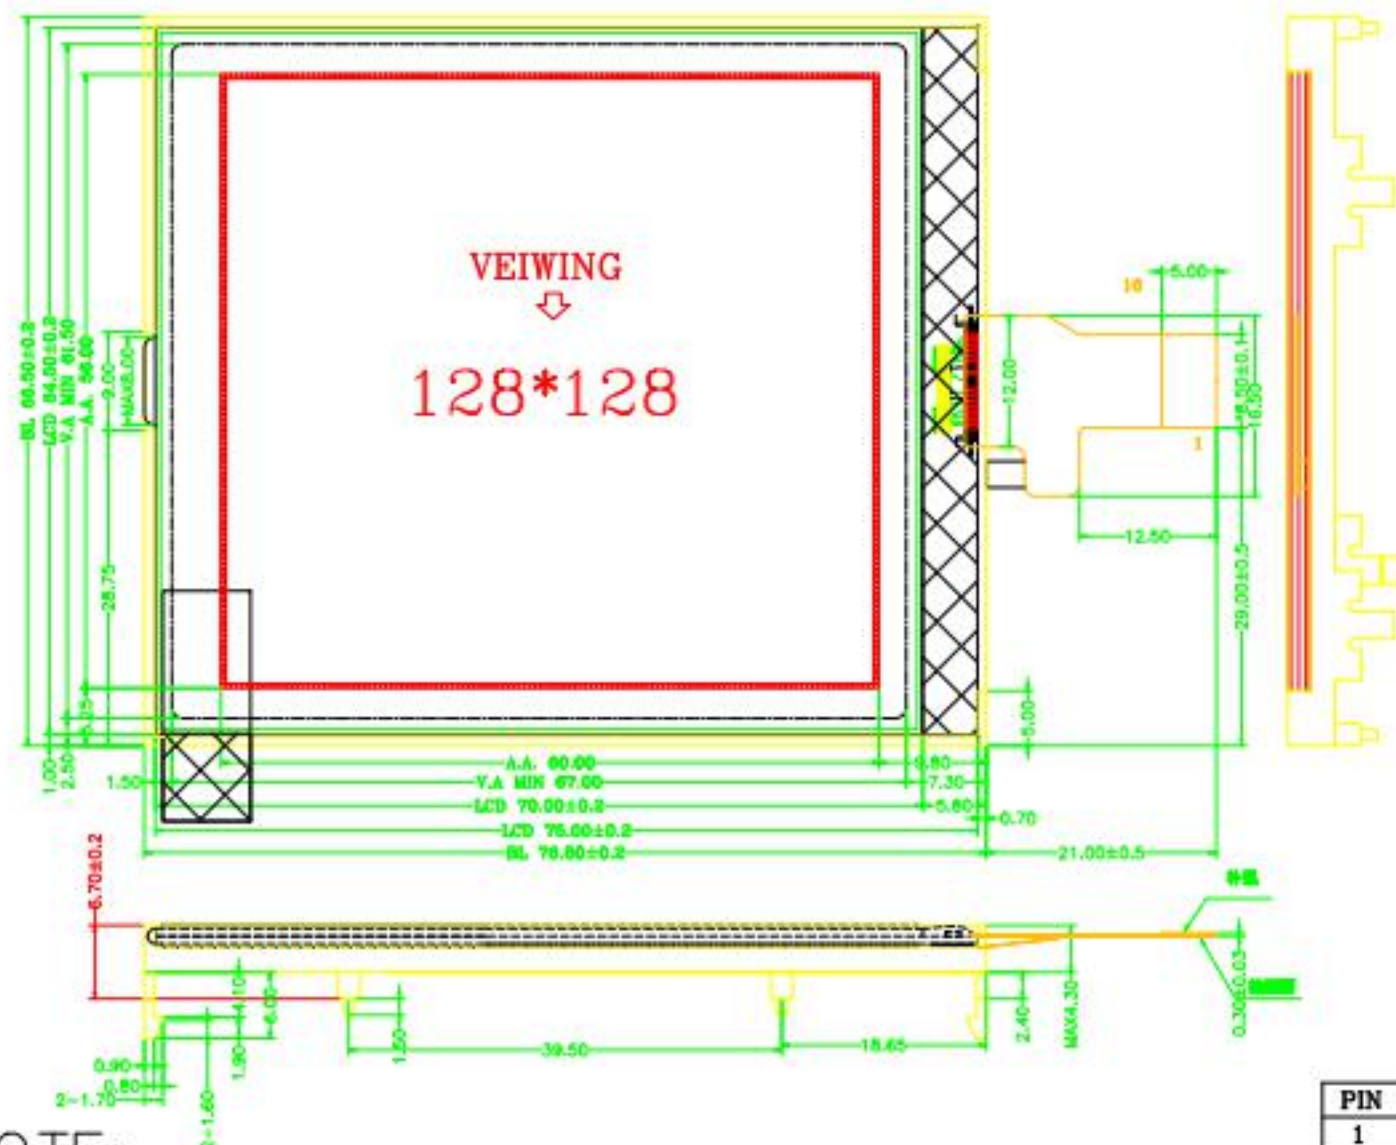


NOTE:

- 1.GENERAL TOLERANCE: $\pm 0.2\text{mm}$
- 2.THE PART OF *ARE THE KEY DIMENSION TO CONTROL

LCD TYPE	FSTN	BACKLIGHT COLOR	WHITE
POLARIZER TYPE	TRANSFLECTIVE	FRAME TYPE	—
DISPLAY TYPE	POSITIVE	DATA TRANSFER	4-SPI
LCD COLOR	—	CONNECTOR TYPE	PIN
VIEWING ANGLE	12:00	TECHNOLOGY	COG
OPERATING TEMP	$-30^{\circ}\text{C} \sim +70^{\circ}\text{C}$	DC-DC IC	—
STORAGE TEMP	$-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$	LCD DUTY	1/128
BACKLIGHT TYPE	—	LCD BIAS	1/12
CONTROLLER IC	ST7571		RoHS
REMARKS	VDD=3.3V, V _{LCD} =14V(typ); VLED=3.1 $\pm$ 0.2V@75mA		

PIN	DESC
1	ESD
2	VG
3	VD1
4	XV0
5	V0
6	VM0
7	VSS
8	VDD
9	SDA
10	SCLK
11	AO
12	RES
13	CSB
14	ESD
15	A
16	K

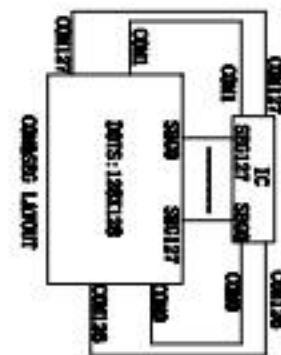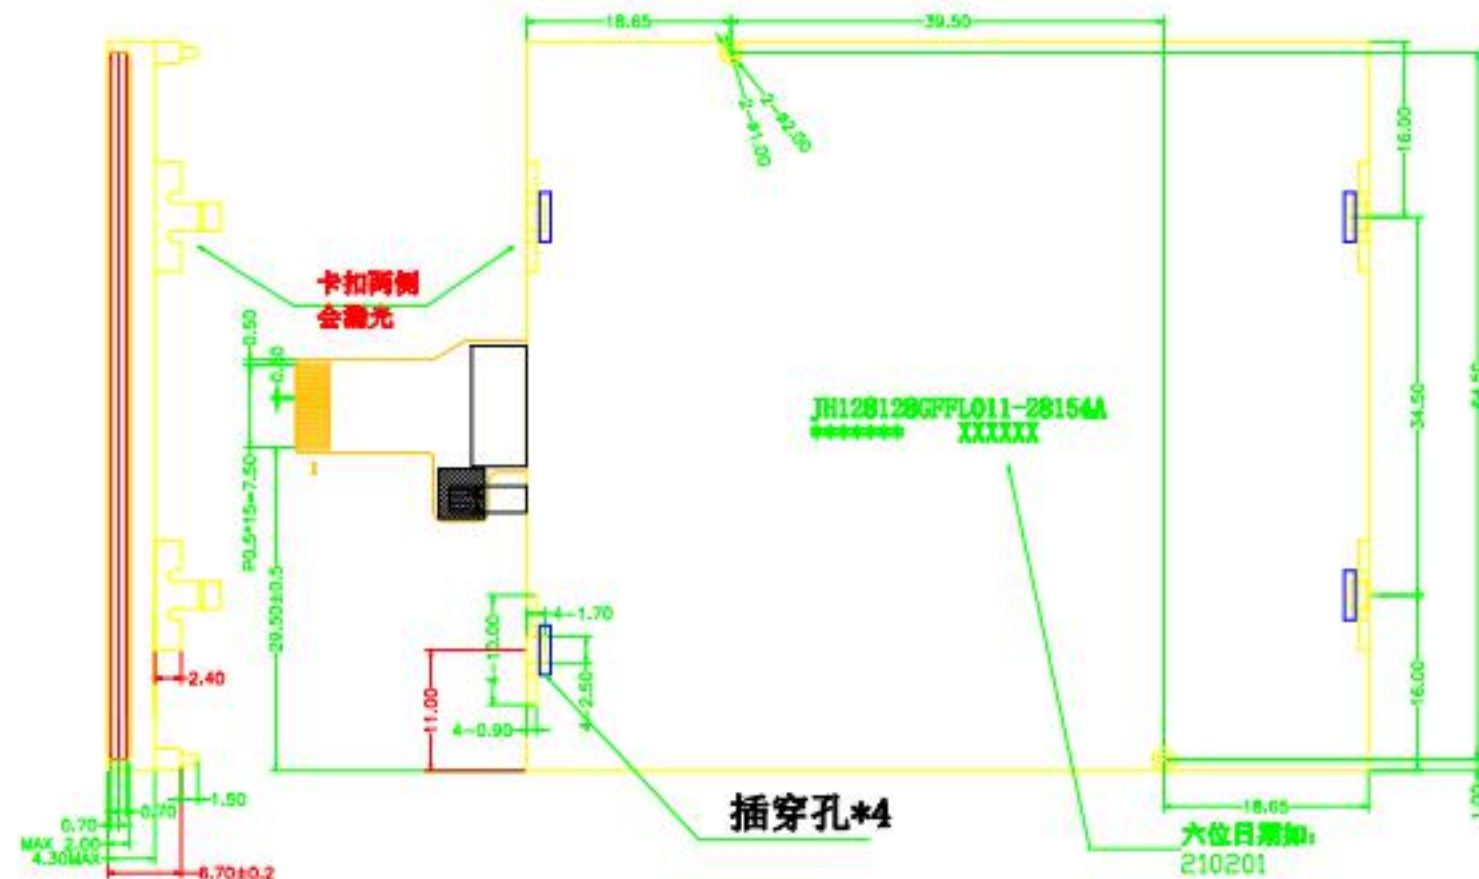

安徽金视界光电科技有限公司

GOLDEN-VISION CORPORATION SPECIFICATION.

TEL: (0559) 7528035

FAX: (0559) 7528266

PRODUCT NO.	GVH128128GFFL011-28154A(LCM)				
CUSTOMER NO.					
DRAWN BY	CQ 2022.4.25	SCALE	1:1	REV.	V07
CHECKED BY		PAGE	1/1		
APPROVED BY		UNIT	mm		

发至: ■开发 ■COG质量 ■COB质量 ■测架 ■FAE