

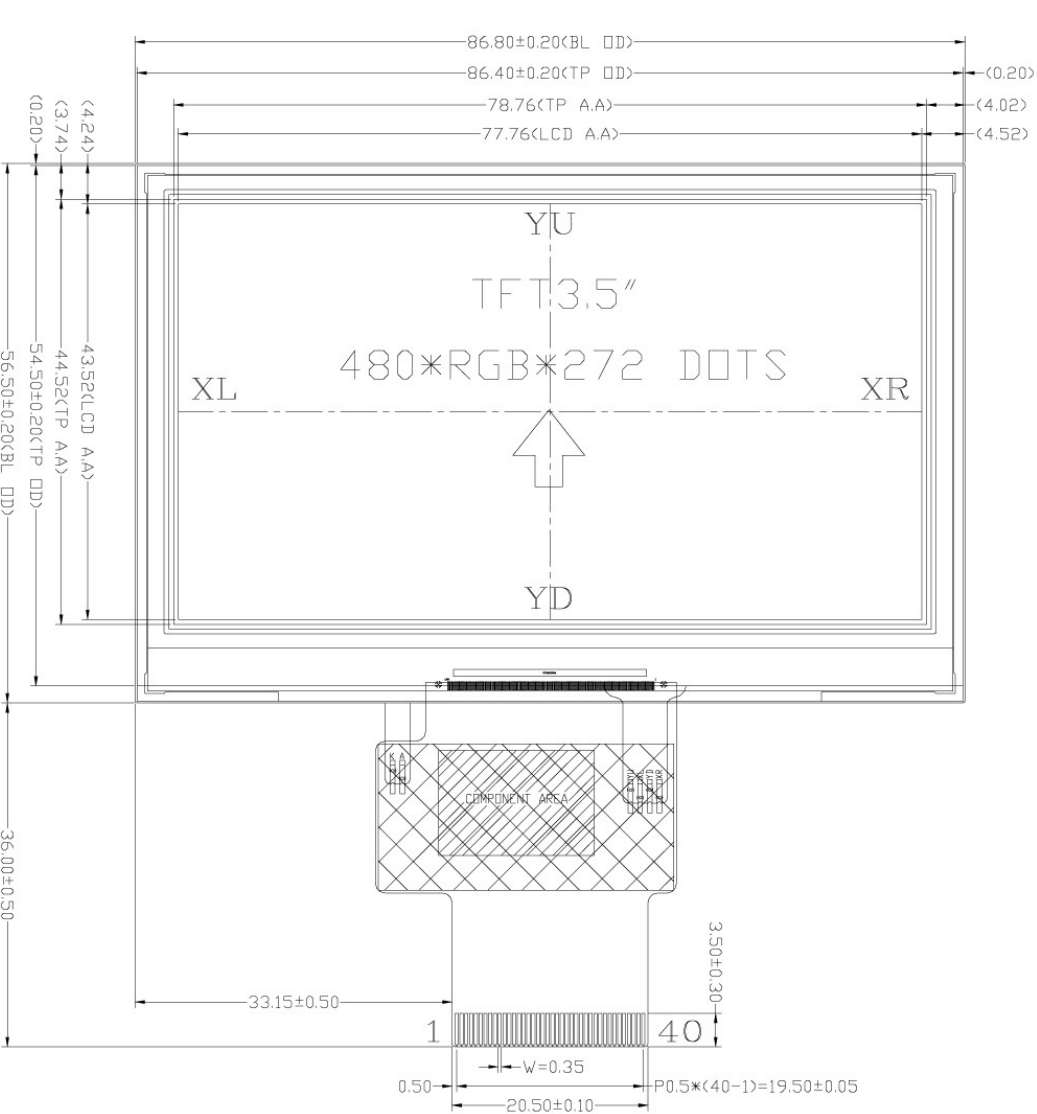
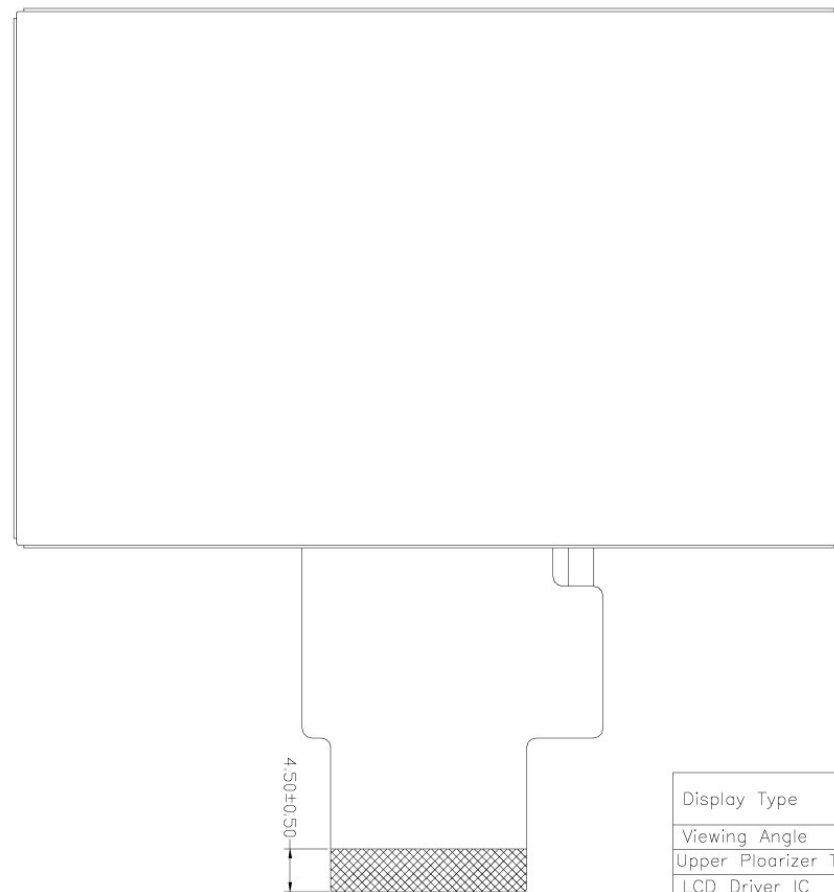




LED+ • LED-

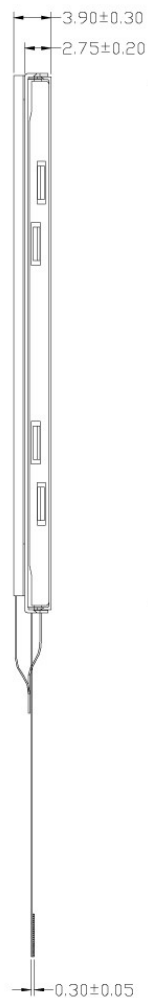

PIN	DESCR
1	LE
2	LE
3	GN
4	V
5	R
6	R
7	R
8	R
9	R
10	R
11	R
12	R
13	G
14	G
15	G
16	G
17	G
18	G
19	G
20	G
21	B
22	B
23	B
24	B
25	B
26	B
27	B
28	B
29	GN
30	DC
31	DI
32	HS
33	V
34	DE
35	N
36	GN
37	X
38	Y
39	X
40	Y

Display Type	TFT
Viewing Angle	6 O'CLOCK
Upper Polarizer Type	Glare
LCD Driver IC	OTA5180A
Operating Voltage	VDD=3.3V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Interface	24 Bit RGB
Backlight	LED 6 CHIPS(19
Surface luminance	350(Typ)cd/m
White X/Y	X:0.29±0.02 Y



东莞市精进光电有限公司

Jingjin Optoelectronics Co., Ltd.

DRAWN	UNIT
CHECKED	SCALE
APPROVED	DATE
	VERSION
	A

Customer NO.	Part NO.
	JTA351402601
TITLE	OUTLINE