


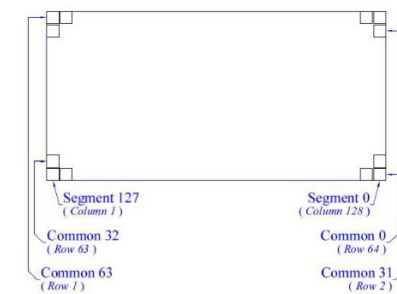


Item	Date	Remark
A	20120531	Original Drawing
B	20130315	Modify Protective Tape
C	20131023	Modify Dimension

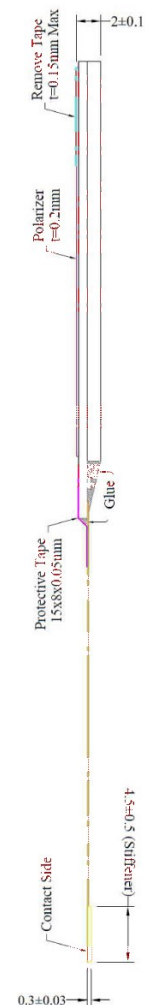

Pin	Symbol
1	N.C. (GND)
2	VLSS
3	VSS
4	N.C.
5	VDD
6	BS1
7	BS2
8	CS#
9	RES#
10	D/C#
11	R/W#
12	E/RD#
13	D0
14	D2
15	D3
16	D4
17	D5
18	D6
19	D7
20	D7
21	IREF
22	VCOMH
23	VCC
24	N.C. (GND)

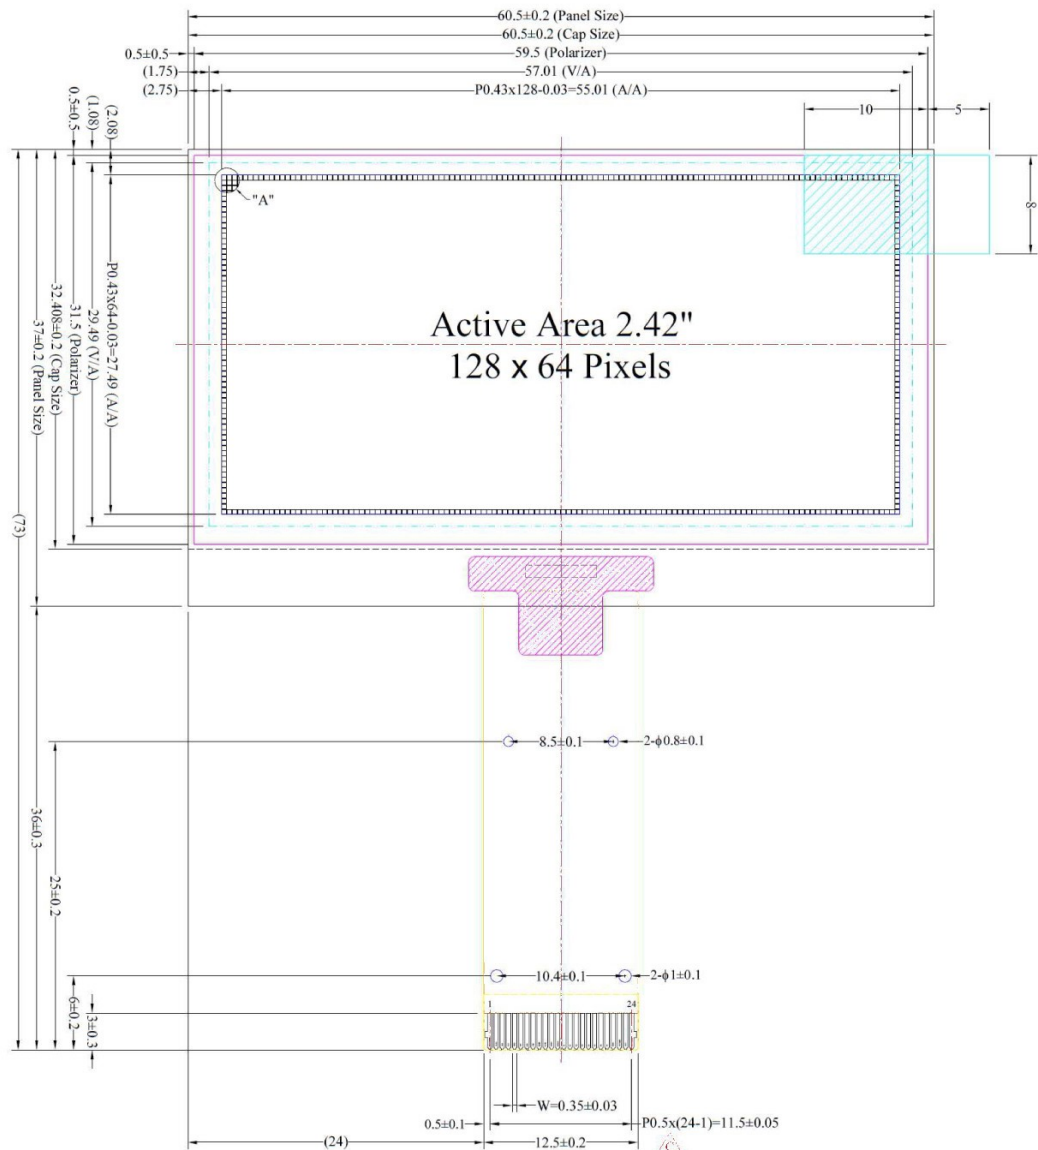

东莞市精进光电有限公司

Jingjin Optoelectronics Co., Ltd.

DRAWN		UNIT	Customer NO.
		mm	
CHECKED	SCALE	NO.	Part NO. JOA2422016Z1
	1:1	1/1	
APPROVED	DATE	VERSION	TITLE OUTLINE
		A	

Notes:

Color: White

Driver IC: SSD1309

Interface: 8-bit 68XX/80XX Parallel, 4-wire SPI, I²C

General Tolerance: ±0.30

The total thickness (2.10 Max) is without polarizer protective film & remove tape.

The actual assembled total thickness with above materials should be 2.35 Max.