
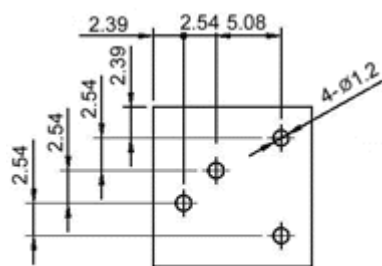
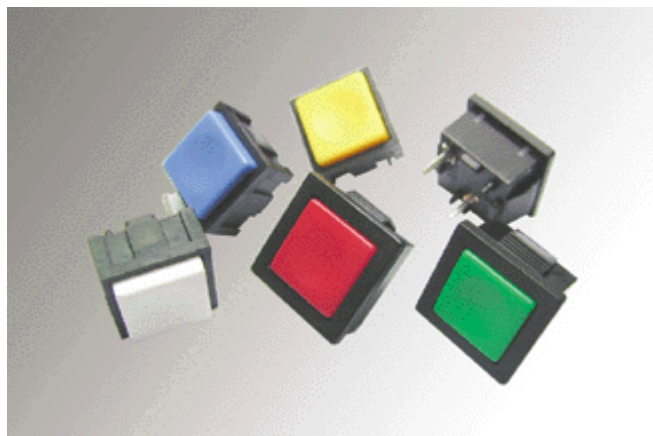


PS19 SERIES
PUSHBUTTON SWITCHES UP TO 0.5A 30VDC
PCB OR PANEL MOUNTING

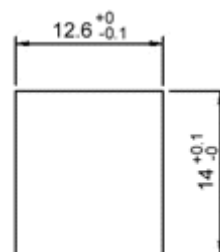

PCB MOUNTING HOLE

PANEL CUT-OUT
THICKNESS: 1.0~1.2mm

- I Current :
 50VDC/125VAC, 100,000cycles.
 10,000cycles.

0.25A
 0.5A 30VDC,
- I Insulation resistance : 100M ohm min.

I Actuator : ABS (UL rated 94V-2 min).
- I Total travel : 0.45±0.15mm.





I Body : PBT (UL rated 94V-2 min).
- I Contact resistance : 150m ohm max.

I Snap dome : Nickel plated stainless steel.
- I Dielectric withstanding voltage :
 for 1 minutes.

I Terminals : Silver plated copper.



PS19



PS19-1

