
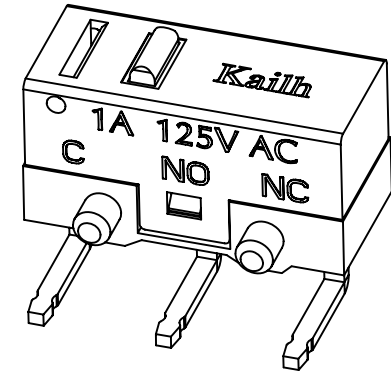
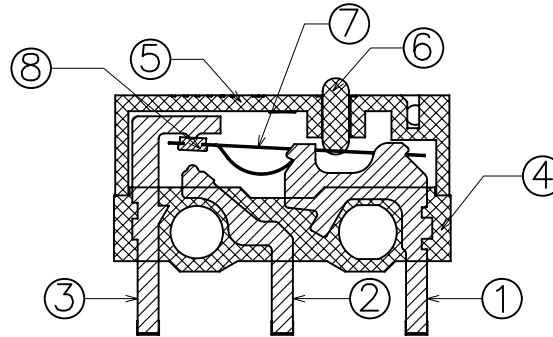
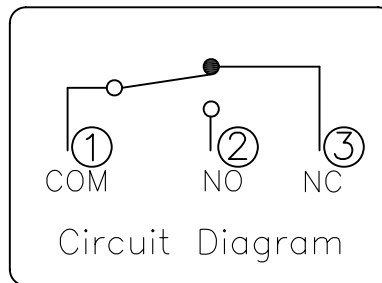
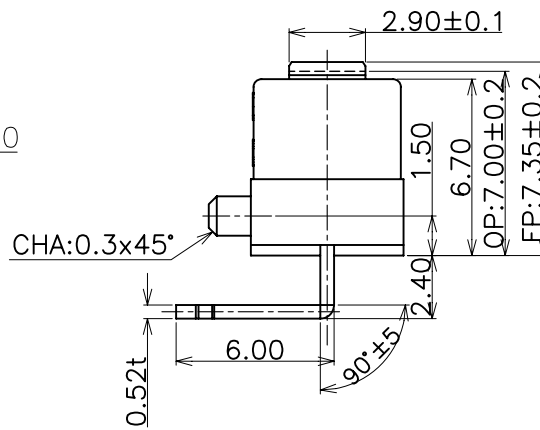
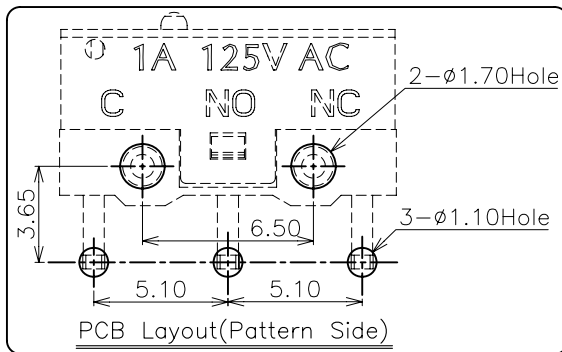
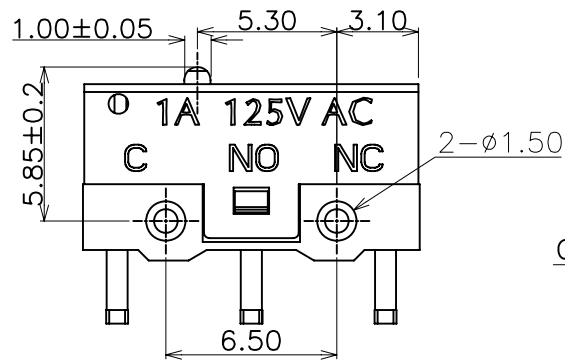


ABIDE BY Kailh GP

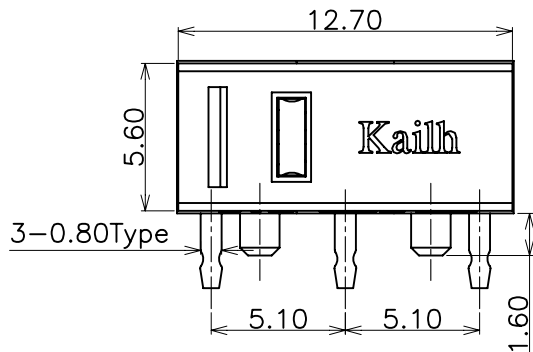

Specification :

- 1. Rating : DC30V 0.1A
- 2. Contact Resistance : 100mΩ Max
- 3. Insulation Resistance : 100MΩ Min (DC250V)
- 4. Withstand Voltage : AC500V (50-60Hz) for 1 minute
- 5. Operation Force : 85±15gf
- 6. Releasing Force : 20gf (Min)
- 7. Operating Position : 7.0 ± 0.2mm
- 8. Mechanical Life : 1,000,000 Cycles (min)

⑧	Contact	—	1	Ag	—	—
⑦	Shrapnel	—	1	Beryllium Copper	—	—
⑥	Keystoke	—	1	POM	Red	UL94HB
⑤	Cover	—	1	PBT	Black	UL94HB
④	Base	—	1	PBT	White	UL94HB
③	Terminal	3	1	BRASS	Plating Silver	—
②	Terminal	2	1	BRASS	Plating Silver	—
①	Terminal	1	1	BRASS	Plating Silver	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD			
DRAWN	Wanwenxue	Jun.21.2010				
CHECKED			TITLE:		Micro Switch	
APPROVALS			PART NO.		MI126703R29	
TOLERANCES ARE		30<L ±0.30 10<L≤30 ±0.20 5<L≤10 ±0.15 L≤5 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
		±2'	DRAWING NO.			SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			