

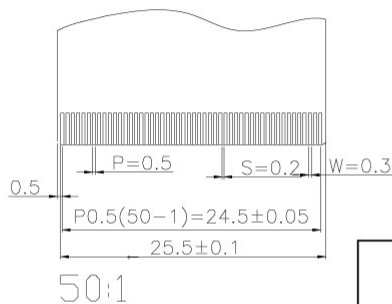
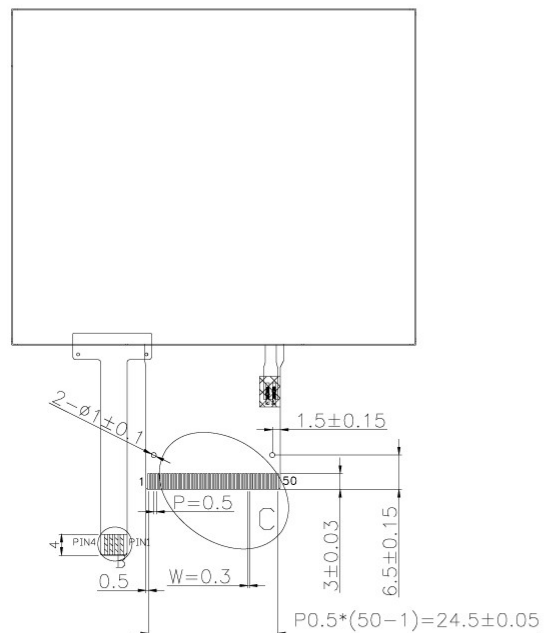




PIN	OUT
1	X1
2	Y1
3	X2
4	Y2

36	VSYNC	21	D
37	OE	22	D
38	VSS	23	D
39	PS0	24	D
40	PS1	25	D
41	PS2	26	D
42	PS3	27	D
43	VSS	28	D
44	NC	29	D
45	NC	30	D
46	NC	31	D
47	NC	32	D
48	VSS	33	V
49	LEDK	34	DC
50	LEDA	35	H

Display Type	TFT
Viewing Angle	TRANSMISSIVE, PC
Upper Polarizer Type	12 O'CLOCK
LCD Driver IC	ANTI-GLARE
Operating Voltage	SSD2119
Operation Temperature	VCI/VDDIO=3.3
Storage Temperature	-20°C TO 70°C
Interface	-30°C TO 80°C
Backlight	SPI+18 Bit RGB
Surface luminance	6-LED White
White X/Y	300cd/m ² (Typ)
	x:0.33±0.02 y:0.33±0.02

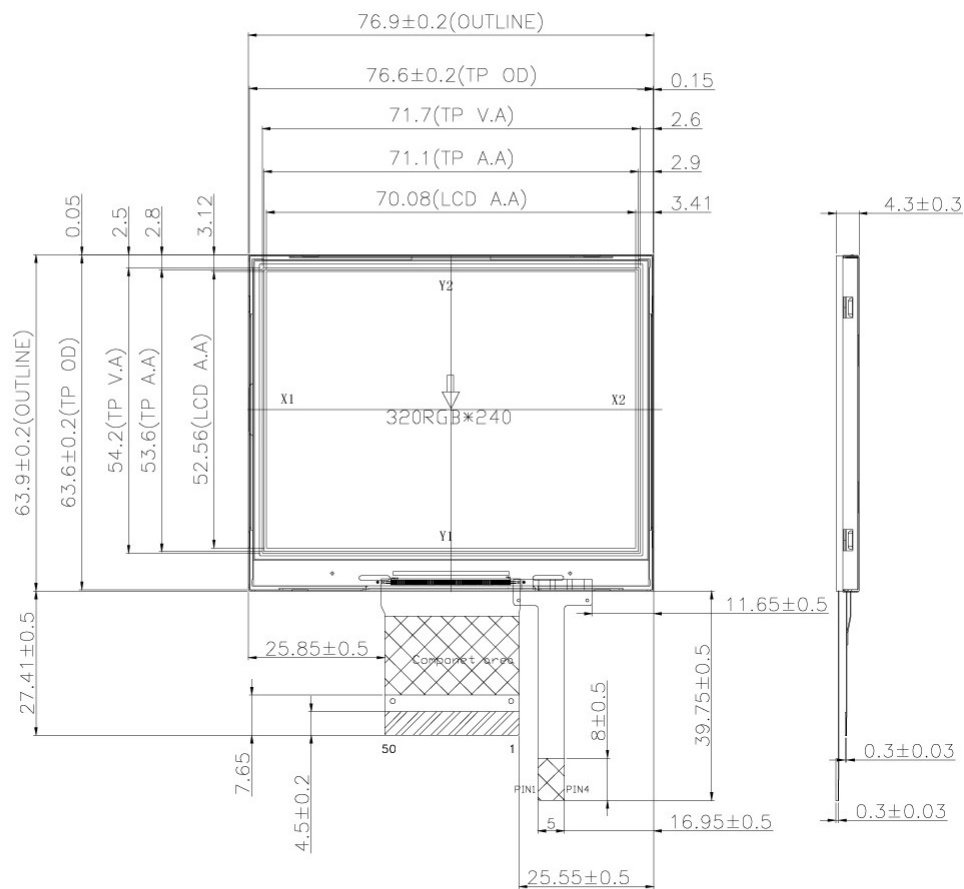

东莞市精进光电有限公司
Jingjin Optoelectronics Co., Ltd.

DRAWN		UNIT	Customer NO.
		mm	
CHECKED	SCALE	NO.	Part NO.
	1:1	1/1	JTA351402401
APPROVED	DATE	VERSION	TITLE
		A	OUTLINE

NOTES:

General Tolerance: ± 0.2

()reference dimension.

Recommended Case Open Area Should Be Less Than Module V.A

Recommended cushion adherent area:TP V.A+1.6mm

PHS MUST BE COMPLIANT