





RoHS

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

SPECIFICATIONS

Rated Current:1.50AMP
Contact Resistance:20m Ω Max
Withstand Voltage:500V AC/DC
Insulation Resistance:800M Ω Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

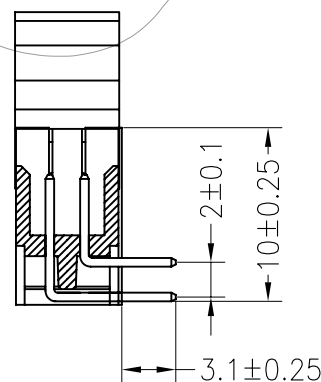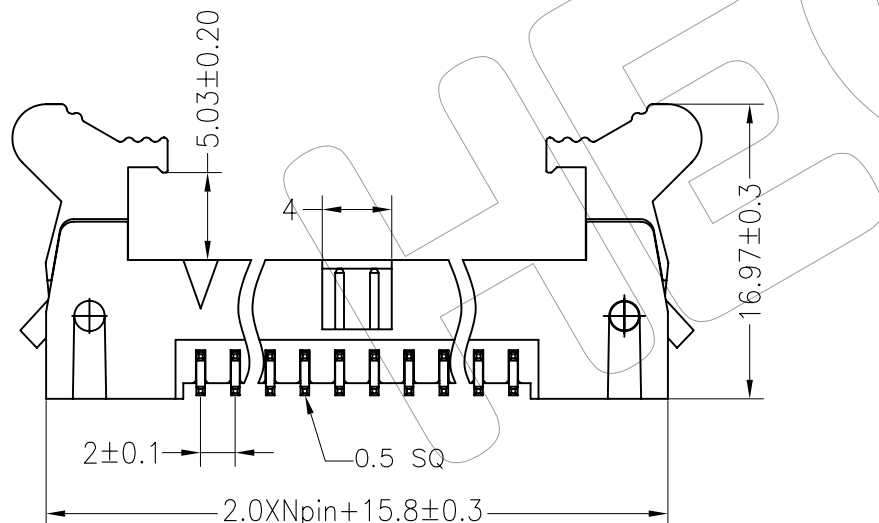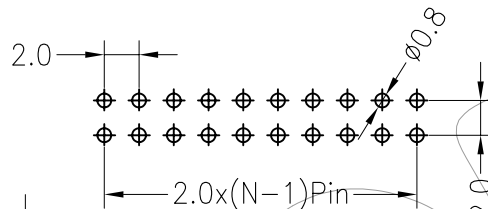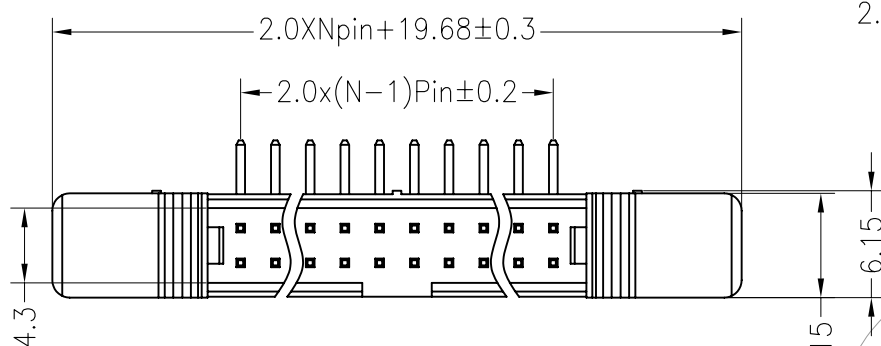

Ordering Information

HC-EH520 XX R XX X X M X 01

No.of Pins 6-64	Contact Plating	Insulator Material Option	Color Type	Latch Type	Packing
	G0:Gold Flash G1:1.5U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin	A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA46 E=BK-PA9T F=BK-LCP	B=Black G=Grey	M=Middle Latch	O=PE Bag A=Tray T=Tube

OPERATION

X.X ± 0.30

X.XX ± 0.20

X.XXX ± 0.10

Angle $\pm 3^\circ$

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-EH520XXRXXXMX01

TITLE:

2.0mm Npin Right Angle ejector Header
Middle Latch

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9