

SWITCH / ANTI-VANDAL SWITCH

PBM16 M16 Bushing

Anti-Vandal Pushbutton Switches, Up to 2A 36VDC, Bushing
16mm, illuminated or non-illuminated

[PDF Download](#)[Get Information](#)[ZOOM IN](#)

Feature

- I IP65 protection level for short case, IP67 protection level for long case
- I Non-illuminated, ring or spot illuminated type
- I 1, 2 pole circuitry; OFF-(ON), ON-(ON) or ON-ON
- I M16 bushing, screw mounting
- I Optional case material and surface treatment
- I Solder terminals

Specification


- I Rating: 2A 36VDC, 2A 48VDC, 3A 250VAC
- I Contact resistance: 50m Ω (max.) initial
- I Insulation resistance: 100M Ω (min)
- I Dielectric strength : 2,000VAC for 1 minute
- I Operating Life: 200,000 cycles for non-illuminated type, 50,000 cycles for illuminated type.

How to Order:


PBM16 — 11M — F S — S R 3 — S N — S

SERIES SYMBOL	FUNCTION	BUTTON TYPE	BUTTON COLOR	LAMP SHAPE	LED COLOR	LAMP VOLTAGE	BODY TYPE	SURFACE TREATMENT	TERMINAL
PBM16 SERIES	11M SPST OFF - (ON)	R CURVE F FLAT H RAISED	S NATURAL (METAL)	N NON LAMP S SPOT R RING	N NONE W WHITE R RED G GREEN U BLUE Y YELLOW	N NONE 3 3V 6 6V 12 12V 24 24V 110 110V 220 220V	A ALUMINUM ALLOY B BRASS S STAINLESS STEEL Z ZN ALLOY	N NONE 1 MIRROR CHROME PLATED 2 MIRROR NICKEL PLATED 3 MIRROR GOLD PLATED 5 CD PATTERN 6 BLACK OXIDE	S SOLDER TERMINALS L SCREW TERMINALS
	13M SPDT ON - (ON)								
	13Z SPDT ON - ON								
	23M DPDT ON-(ON)								
	23Z DPDT ON-ON								


Item

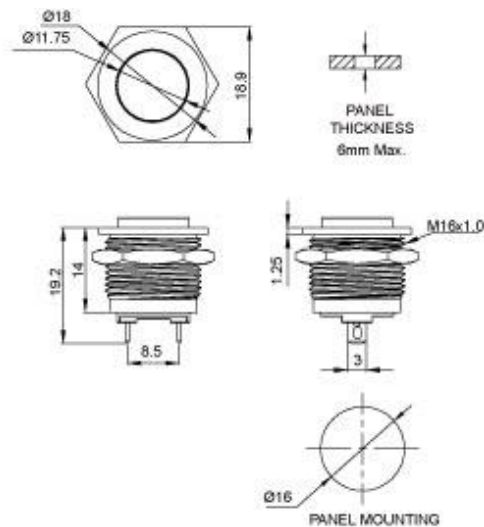

PBM16-11M-HS-NNN-S5-S

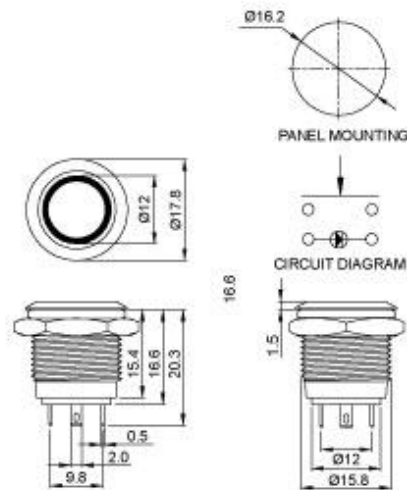

PBM16-11M-FS-R**-SN-S

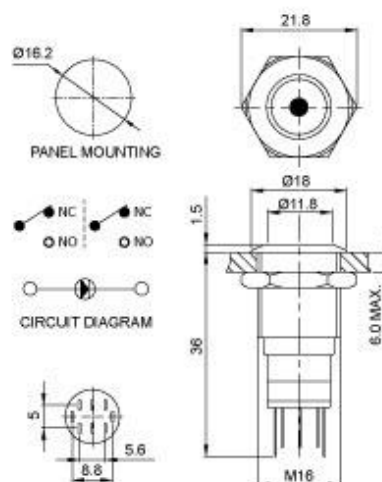

PBM16-23Z-S**-SN-S

PBM16-11M-FS-
NNN-S5-SPBM16-11M-FS-
NNN-B1-SPBM16-11M-HS-
NNN-B1-SPBM16-11M-HS-
NNN-S2-SPBM16-11M-HS-
NNN-S5-SPBM16-11M-RS-
NNN-B1-SPBM16-11M-RS-
NNN-S5-SPBM16-23Z-HS-
NNN-B1-SPBM16-11M-FS-
RU*-SN-SPBM16-23Z-FS-
SR*-SN-SPBM16-13Z-FS-
RG*-SN-SPBM16-23Z-HS-
RU*-S5-S

 Start Print

Canal Components Inc. Tel:+886-2-29161263 Fax:+886-2-29117574
Copyright ©2009 Canal Components Inc.. All rights reserved.