


REV	DESCRIPTION	MODIFY BY	DATE
A0	1 ST DESIGN	WD	2021-05-15
A1	增加ID标签	LZZ	2021-08-21

1	D82
2	D83
3	HO
4	MI
5	KS
6	D813
7	D112
8	VO
9	D14
10	D815
11	DC
12	D80
13	D8
14	IE
15	D812
16	D811
17	D810
18	D89
19	D88
20	D87
21	RESCT
22	D86
23	D85
24	D84
25	D1001
26	D1002
27	D1003
28	D1004
29	D10A
30	D80



1. Display Mode:	2.8" TFT/IPS
2. Driving Condition:	VDD=2.5V
3. Viewing Direction:	ALL
4. Operating Temp:	-20~+70°C
Storage Temp:	-30~+80°C
5. LCD:	BV02BQVE-N80
6. IC:	ST7789V2-G4-A
7. Backlight:	WHITE LED*4
8. Unspecified tolerance is $\pm 0.20\text{mm}$	
9. ROHS Request	

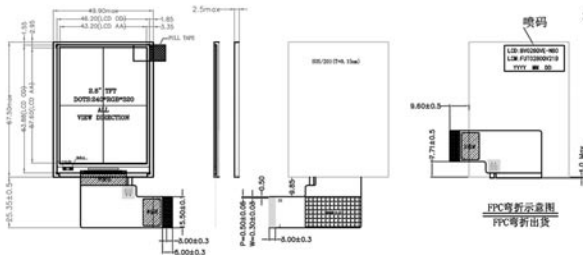

Vf=3.2V(if=80mA)
LED CIRCUIT DIAGRAM:



深圳金视界光电科技有限公司
SHENZHEN GOLDEN VISION OPTOELECTRONIC CO., LIMITED

SCALE: 1/1	UNIT: mm	DATE		PAGE: 1/1		VER: V1.0
MODEL NO.:	GVH0280QV21B			APPROVE	CHECK	DESIGNER
PART NO.:						