


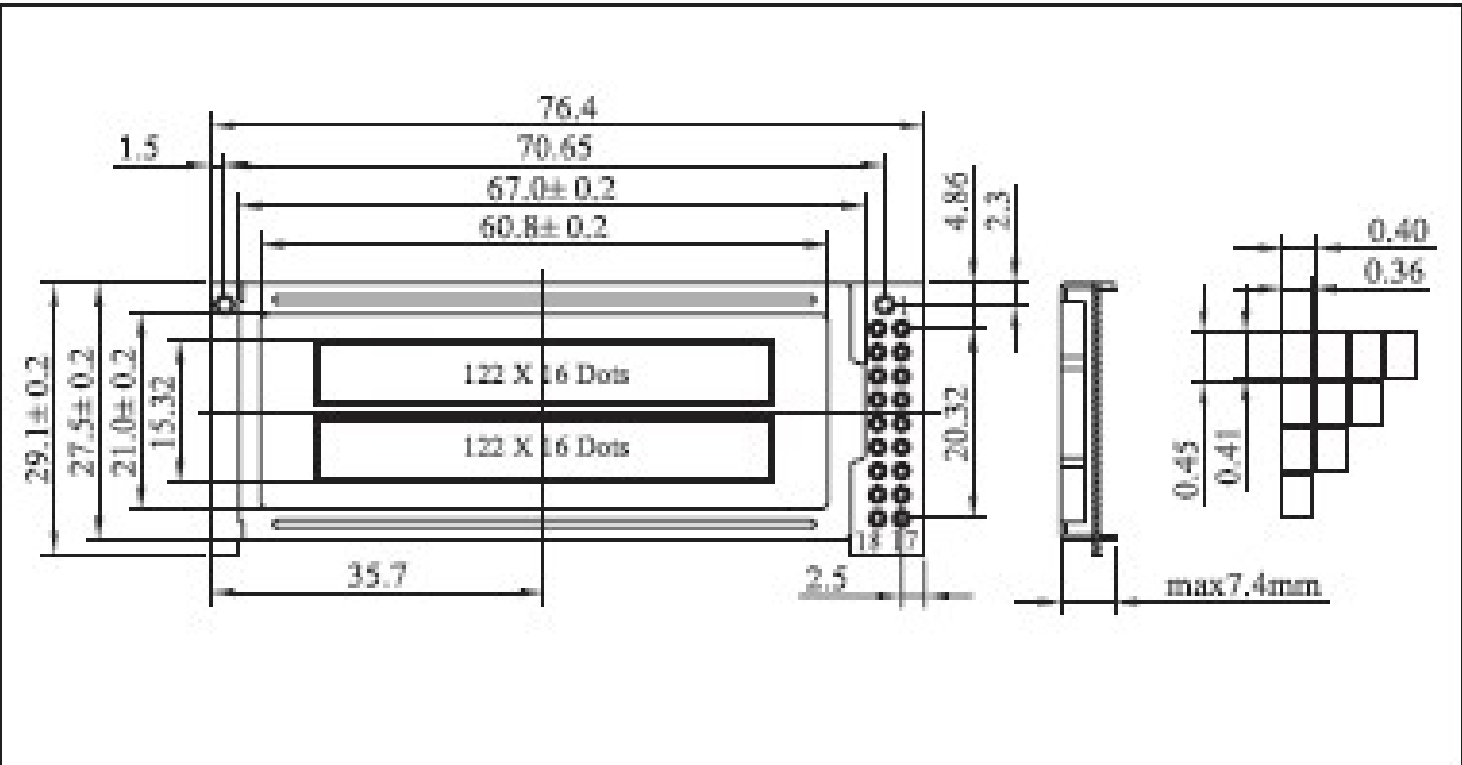

ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min.	Max.	Unit
Supply Voltage(Logic)	Vdd • Vss	-0.3	7.0	V
Supply Voltage(LCD)	Vdd • V0	-0.3	+5.0	V
Input Voltage	Vi	-0.3	Vdd + 0.3	V
Operating Temp.	Topr	-15	60	°C
Storage Temp.	Tstg	-20	70	°C

MECHANICAL DATA

Item	Max.	Unit
Module Size(W X H X T)	76.4 X 29.1 X 6.0	mm
Viewing Area(W X H)	68.8 X 21.0	mm
Dot Pitch(W X H)	0.40 X 0.45	mm
Dot Size(W X H)	0.36 X 0.41	mm
View Angle	6 or 12 O'clock	


ELECTRICAL CHARACTERISTICS (Vdd=5V±0.25V)

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input High Voltage	Vih		2.0		Vdd	V
Input Low Voltage	Vil		-0.3		0.8	V
Output High Voltage	Voh	Ioh=0.1mA	2.4		Vdd	V
Output Low Voltage	Vol	Iol=1.6mA	0		0.4	V
Supply Current	Idd	V0=5.0V		0.6	1.0	mA
LCD Driving Voltage	Vdd • V0	Ta=25 °C	4.5	4.7	5	V

PIN CONNECTIONS

Pin	Symbol	Level	Function
1	VDD	+5V	Power supply for logic
2	VSS	0V	Power GND
3	V0		Operation voltage for LCD
4	RST	L	Reset signal, active"L"
5	E1	H/L	Enable signal 1
6	E2	H/L	Enable signal 2
7	R/W	H/L	H:Read L:Write
8	A0	H/L	H:Data L:Instruction code
9	DB0	H/L	Data bus line
10	DB1	H/L	
11	DB2	H/L	
12	DB3	H/L	
13	DB4	H/L	
14	DB5	H/L	
15	DB6	H/L	
16	DB7	H/L	
17	BLA	+5V	Backlight Anode(+5v)
18	BLK	0V	Backlight Cathode(0V)

BLOCK DIAGRAM

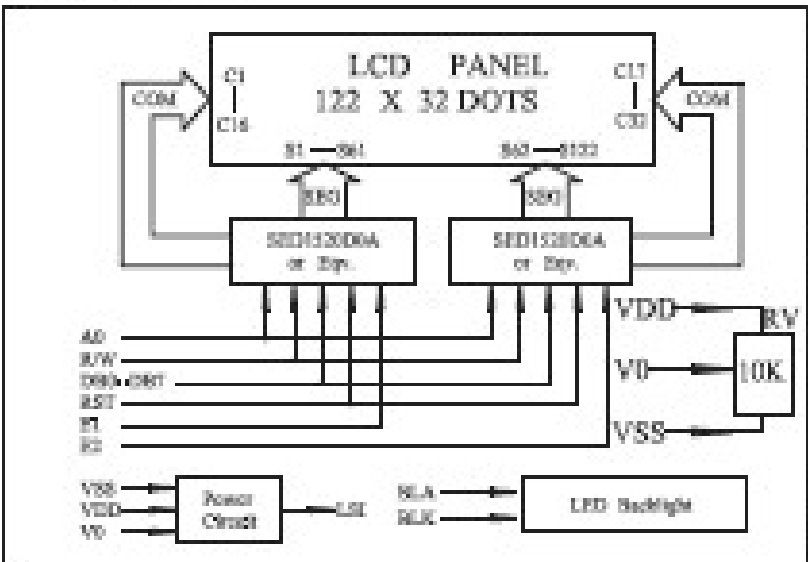

LCD Type

LCD Color	Backlight
Yellow Green	EL /100V /400Hz
Yellow Green	LED /2.1V /40mA
White	LED /3.1V /30mA