



Category

SWITCH

- PUSH SW
- ROCKER SW
- ANTI-VANDAL SW
- CAPACITANCE SW
- SLIDE SW
- TOGGLE SW
- MICRO/DETECTOR SW
- PRESSURE SW
- ROTARY SW
- DIP SW
- TACT SW
- LIGHTED TACT SW
- KEYLOCK SW
- SAFETY & CONTROL SW
- VEHICLE SW

SOCKET

BREAKER

FUSE HOLDER




OUR PRODUCT

[Home](#) ▶ [Our Product](#) ▶ [M142](#) ▶ [M142](#)

SWITCH / MICRO/DETECTOR SW

M142 SNAP ACTION MICRO SWITCHES Up to ENEC 25A

SNAP ACTION MICRO SWITCHES UP TO 22.5A
250VAC
SPDT, SPST, ON-(ON), OFF-(ON) or ON-(OFF)

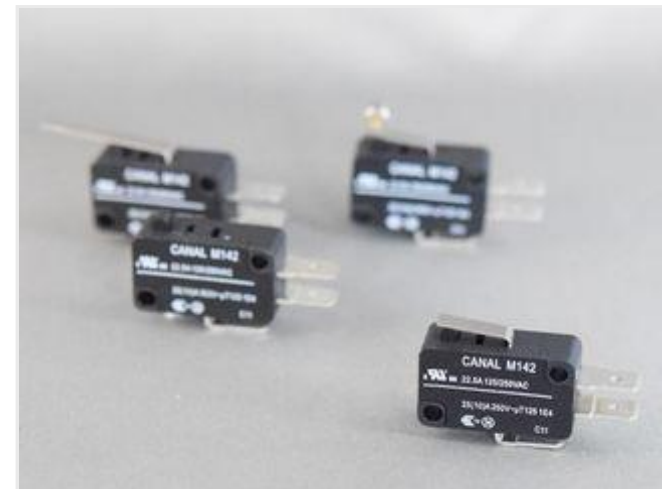

Feature

- 22.5A 125/250VAC (UL/CUL)
- 16A 125/250VAC (UL/CUL)
- 20(8)A 250VAC (5E4) (Nemko, ENEC)

FUSE

ENCODER

INDICATOR

POTENTIOMETER

CONNECTOR

WATERPROOF CONNECTOR

WATERPROOF PARTS

New Product

Products Search


Search






M142-AA1-1BB-4C

- 16(8)A 250VAC ~T125 (Nemko, ENEC)
- 25(10)A 250VAC ~T125 (Nemko, ENEC)
- Contact resistance : 20m ohm initial (max.)
- Dielectric strength : 1,000 VAC for 1 minute
- Insulation resistance : 50M ohm min.(at 500 VDC).
- Mechanical life cycle : 500,000
- Loaded life cycle : 10,000
- Plunger: PBT
- Cover: PBT 94V-0 (min)
- Base: PBT 94V-0 (min)
- Terminal : Tin or silver plated copper alloy
- Contact : Silver alloy clad copper alloy & silver copper
- Spring : Steel wire
- Movable contacts : Tin or silver plated copper alloy

Specification

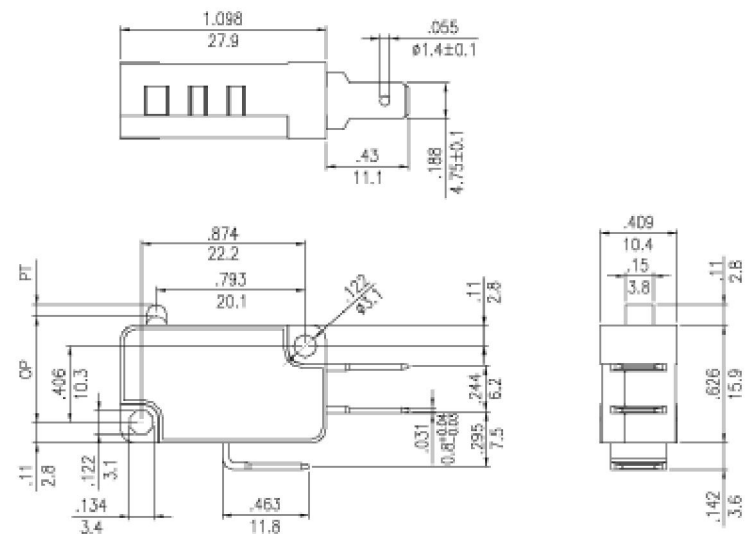

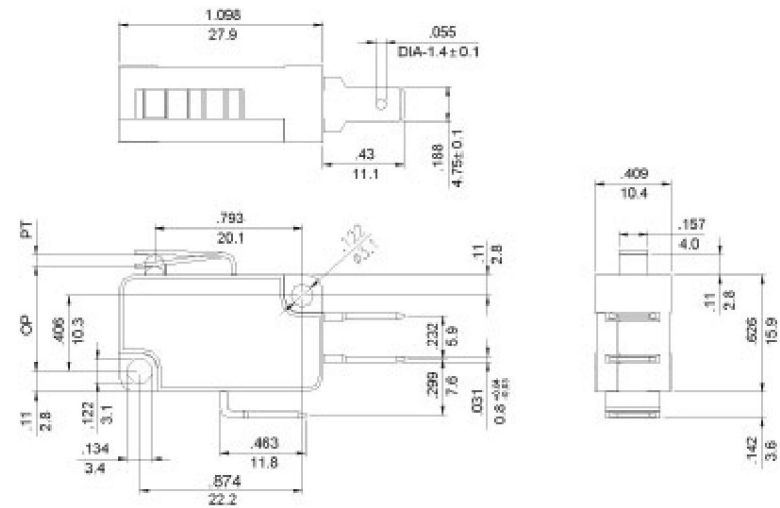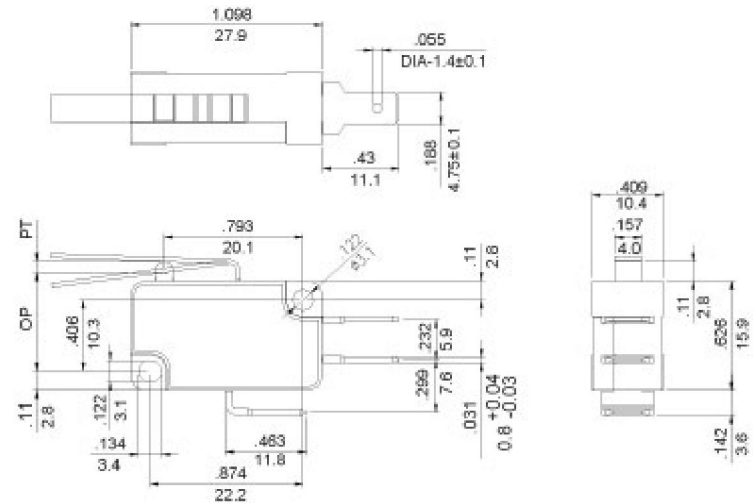M142-AA1-2BB-4C5M142-AA1-2BB-4C4M142-AA0-4BB-4C6

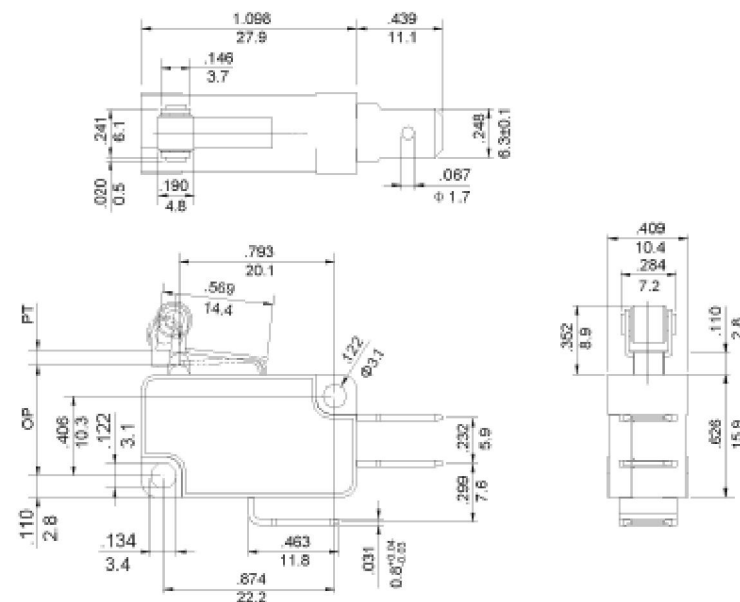

◀ BACK



5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.
Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved