


本公司智慧財產，未經同意不得複製

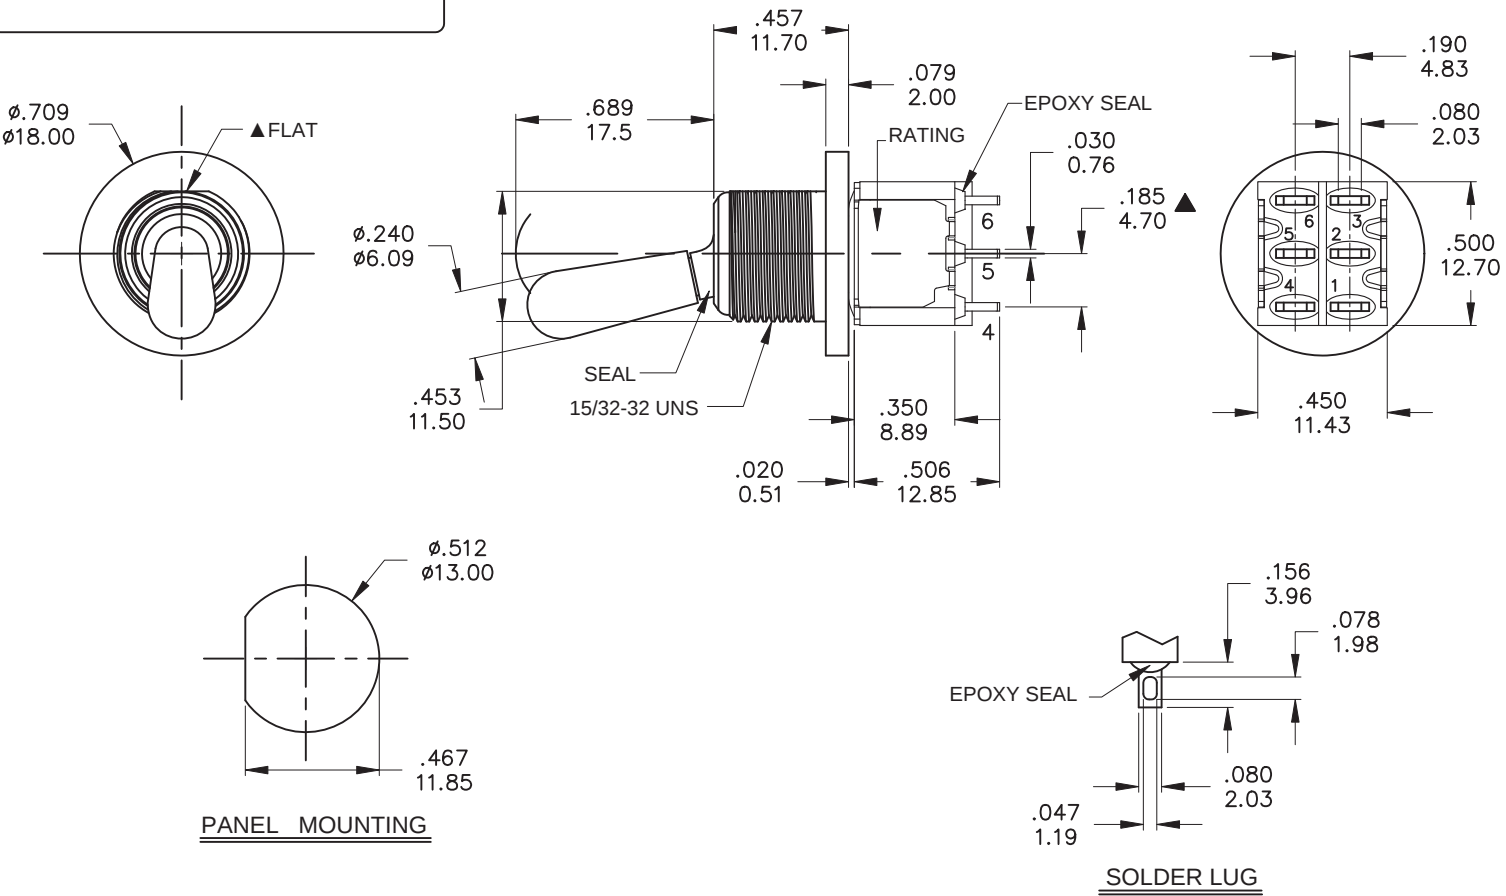

Model No.	POS.1	POS.2	POS.3
1MD1	ON	NONE	ON
Term. Comm.	2-3,5-6	N/A	2-1,5-4
SCHEMATIC			

SWITCH FUNCTION

	PART NO.	PART NAME	Q'TY
1	MNU-1M07	15/32 INCH NUTS	1
2	MNU-1M09	LOCKWASHER	1
3	FCP-1F04	SPLASH PROOF O-RING	1

FILE NAME : HARDWARE-0052

SPECIFICATIONS

MECHANICAL LIFE: 100,000 make-and-break cycles.
CONTACT RESISTANCE: 10 mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000 MΩ min.
DIELECTRIC STRENGTH: 1,000 Vrms min. @sea level.
OPERATING TEMPERATURE: -40°C to 85°C.

MATERIALS

CASE: Diallyl phthalate (DAP) (UL94v-0).
ACTUATOR: Brass,chrome plated.
BUSHING: Brass,nickel plated.
HOUSING: Stainless Steel.
TERMINAL /CONTACT: Copper alloy.
RoHS & Lead Free

	CONTACT PLATING	TERMINAL PLATING	RATINGS
Q	Silver	Q = Silver	5 Amps @120 VAC or 28VDC
C	Gold over Silver	C = Gold over silver	2 Amps @250 VAC
R	Gold	R = Gold	0.4 Volt-Amps(VA) max. @20V max. (AC or DC)



TACLEX ELECTRONICS CO., LTD.

	符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2	TITLE 圖名	Miniature Toggle Switches			SIZE 圖紙	A4
1	Ⓐ				TOLERANCE (公差) : 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR : ± 5° FILE NAME : 1MDP1859	DWG NO. 圖號	1MD1T88B52M1QES-5			UNIT 單位	inch mm
2	Ⓑ					REV. 版本	A	DATE 日期	MAR - 27 - 2018	SHEET 張數	1 of 1
3	Ⓒ					CHECKED BY 審核				DRAWN BY 製圖	IRENE
4	Ⓓ										
5	Ⓔ										