



# Product Brochure

**SDWM340NT**



## **34 Inch Wall Mounted Open-Cell Display for Advertising ( Android Version)**

**The information in this document is subject to the current product.**

**January 2026**



## I. Product Highlights

- QD-MiniLED Backlight Tech.
- Local Dimming Technology
- 21:9 Aspect Ratio
- 1200 Nits Peak Brightness
- 98% DCI-P3
- 1152-zone Array Backlight
- Ultimate Slim Craftsmanship
- 1,000,000:1 Dynamic Contrast
- 304 Stainless Steel Metallic Texture
- Dual-channel 10W Stereo



34 Inch Wall Mounted Display for Advertising  
**QLED Dynamic Backlight**  
**High Contrast · High Impact**

Vivid And Saturated Colors With Quantum Dot Technology  
Enhanced Color Purity Makes Content More Eye-Catching,  
Ideal For Advertising And Branding Displays.





## II. Specifications


| Category                       |                        | 34 Inch Series                                                                                                                           |
|--------------------------------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Series Number                  |                        | SDWM340NT                                                                                                                                |
| LCD Screen Parameters          | Active Area            | 799.8mm(H)×334.8mm(V)                                                                                                                    |
|                                | Display Resolution     | 3440(H)×1440 ( V )                                                                                                                       |
|                                | Pixel Pitch            | 0.2325(H)*0.2325(V)mm                                                                                                                    |
|                                | Display Colors         | 16.7M                                                                                                                                    |
|                                | Brightness             | 500 to 1200 cd/m <sup>2</sup> (Optional)                                                                                                 |
|                                | Back-light             | 1152-zone Local Dimming Mini-LED Backlight                                                                                               |
|                                | Dynamic Contrast Ratio | 1,000,000: 1                                                                                                                             |
|                                | NTSC Color Gamut       | 94%                                                                                                                                      |
|                                | Angle Of View          | 89/89/89/89 (Typ.)(CR≥10)                                                                                                                |
|                                | Refresh Rate           | 60 Hz                                                                                                                                    |
|                                | Response Time          | 8ms                                                                                                                                      |
|                                | Service Life           | >50,000 Hours                                                                                                                            |
| Basic Parameters of The Scheme | CPU                    | RK3567; Quad-core Cortex-A72+ Quad-core Cortex-A53 up to 2.2GHz                                                                          |
|                                | GPU                    | ARM G52 MC3 GPU<br>The 3D GPU is fully compatible with OpenGLES 1.1, 2.0, and 3.2, and supports OpenCL up to version 2.0 and Vulkan 1.1. |
|                                | RAM                    | DDR 4GB/8GB                                                                                                                              |
|                                | ROM                    | EMMC 64G                                                                                                                                 |
|                                | OS                     | Android 14                                                                                                                               |



|                                     |                          |                                                                                                                                                  |
|-------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
|                                     | Network Support          | Supports RJ45 R/A Gigabit Ethernet with PoE;<br>Supports 2.4GHz + 5GHz Wi-Fi 6, compatible with Wi-Fi 802.11b/g/n/ax;<br>Supports Bluetooth 5.3. |
| <b>Input &amp; Output Interface</b> | USB Port                 | 2 PCS (1*OTG)                                                                                                                                    |
|                                     | RJ45                     | 1 PCS                                                                                                                                            |
|                                     | TF Card Slot             | 1 PCS                                                                                                                                            |
|                                     | SIM Card Slot            | 1 PCS                                                                                                                                            |
|                                     | HDMI Input               | 1 PCS                                                                                                                                            |
| <b>Support Media Format</b>         | Video Format             | H.265, H.264, VP9, AVS2, AV1, ETC.                                                                                                               |
|                                     | Image Format             | BMP, JPEG, PNG, ETC.                                                                                                                             |
|                                     | Audio Format             | MP3,WMA,WAV, APE, FLAC, AAC, OGG, M4A, 3GPP                                                                                                      |
| <b>Others</b>                       | Speaker                  | Stereo L/R, 8Ω5W × 2                                                                                                                             |
|                                     | Input Voltage            | 100 ~ 240V 60/50Hz                                                                                                                               |
|                                     | Timer Switch             | Support                                                                                                                                          |
| <b>Environmental Factor</b>         |                          | Operating Temperature: 0℃ ~ 50℃                                                                                                                  |
|                                     |                          | Storage Temperature: -20℃ ~ 60℃                                                                                                                  |
| <b>Accessory Package</b>            |                          | Manual, Warranty Card, Power Cord, Wifi Antenna (configured According To Different Versions)                                                     |
| <b>Overall Configuration</b>        | Appearance Material      | Safety Design, 304 Stainless Steel Enclosure, Commercial-grade Durability                                                                        |
|                                     | Appearance Color         | Silver/other colors optional                                                                                                                     |
|                                     | Dimension (L* W * T)     | See Technical Drawing                                                                                                                            |
|                                     | Gross Weight (Packaging) | 10.0kg (for Reference Only, Actual Product Shall Prevail)                                                                                        |



### III. Product Dimension

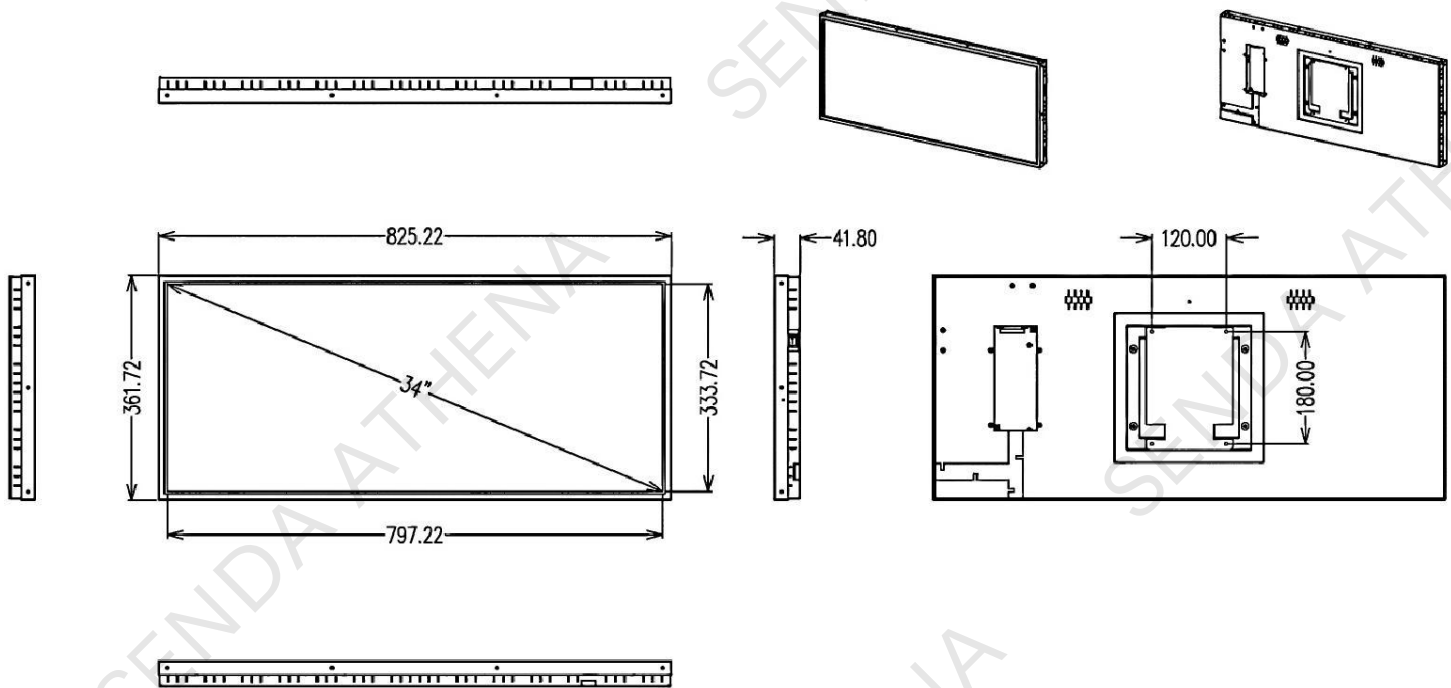

### IV. Product Advantages

- **34" QLED Quantum Dot technology**

Direct view without barriers, truer colors

- **Cybertruck-inspired Geometric Body**

Full 304 stainless steel metallic texture

- **Local Dimming Technology**

Distinct layers of light and shadow

- **1200 nits Dynamic Ultra-high Brightness**

Sharp & clear images even under strong light

- **1152-zone Array Backlight**

Dynamic dimming for purer visuals

- **Ultra-narrow Bezel Design**

Immersive borderless vision



## V. Applicable Scenarios

### ● Public Places

Subway, Airport, Park, Exhibition Hall, Stadium, Museum, Conference, Lottery Center

### ● Educational Institution

Various Schools, Off-campus Educational Institutions, Administrative Agencies

### ● Financial Institution

Banks, Securities, Funds, Insurance Companies, Exchanges, Pawn Shops

### ● Commercial Organization

Shopping Malls, Franchises, Hypermarkets, Hotels, Travel Agencies, Restaurants

### ● Entertainment Venues

Cinemas, Fitness Centers, Resorts, Entertainment Venues, Bars, Beauty Salons

### ● Real Estate

Apartments, Villas, Office Buildings, Commercial Buildings, Sales Offices

## VI. Case Show





## VII. After-sales Policy

### ● Warranty Period

The warranty period is one year from the date the product arrives at the destination port. During the warranty period, if the small parts are defective, they can be replaced by express delivery. If the complete unit has to be returned for maintenance, the freight is to be covered by the sending side.

### ● Extended Warranty

Extended warranty pricing is calculated as a percentage of the EXW unit price.



2-year warranty: add 8% of the EXW price

E.g. EXW = USD\$1000/PCS → 2-year warranty = USD\$1000 + USD\$80 = USD\$1080

3-year warranty: add 15% of the EXW price

E.g. EXW = USD\$1000/PCS → 3-year warranty = USD\$1000 + USD\$150 = USD\$1150

4-year warranty: add 21% of the EXW price

E.g. EXW = USD\$1000/PCS → 4-year warranty = USD\$1000 + USD\$210 = USD\$1210

5-year warranty: add 26% of the EXW price

E.g. EXW = USD\$1000/PCS → 5-year warranty = USD\$1000 + USD\$260 = USD\$1260

During the warranty period, both parties shall bear his one-way freight.