


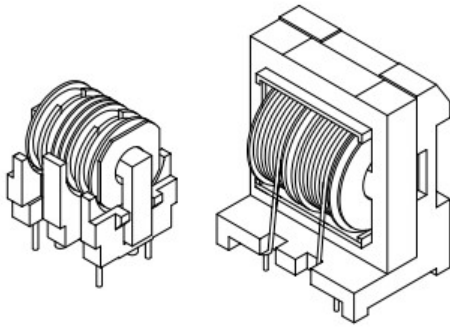

POWER FERRITE TRANSFORMERS

UT20 ET24 ET28 ET35

Introduction:

1.The series products contains:

2.The figure shown for reference only; Better at providing ODM/OEM to customers.

Make the technical parameters more size up the user's product design requirements.


FEATURES

Possessing of high permeability
High saturation flux density
Low loss, at 100°C the power loss goes bottom


COMMON APPLICATIONS

Drive transformers
Main transformers
Smoothing chokes
General purpose use



Electronical Schematic



PHYSICAL CHARACTERISTICS

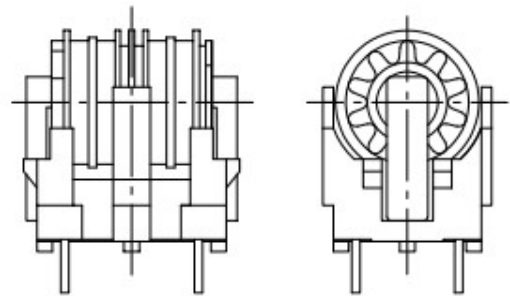

Structural Drawing

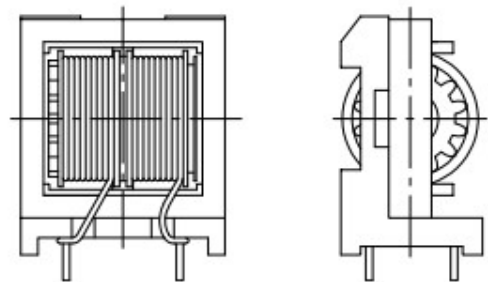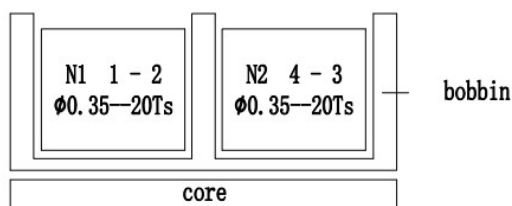

General Properties

Operating

Temperature:-40°C to +105°C.

Including temp rise

Storage Temperature:-25°C to +85°C.

Insulation Class:B.