



TAKFLY COMMUNICATIONS CO., LTD.

ADD: Takfly Industrial Park, Tongsheng Community, Dalang Street, Longhua District, Shenzhen, 518109, China.

Tel: +86-755-28106528

Fax: +86-755-23777278



LC-LC Patch cord



Duplex



Simplex

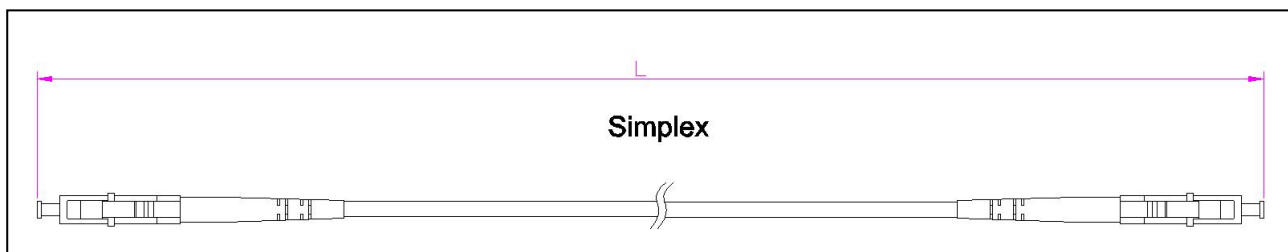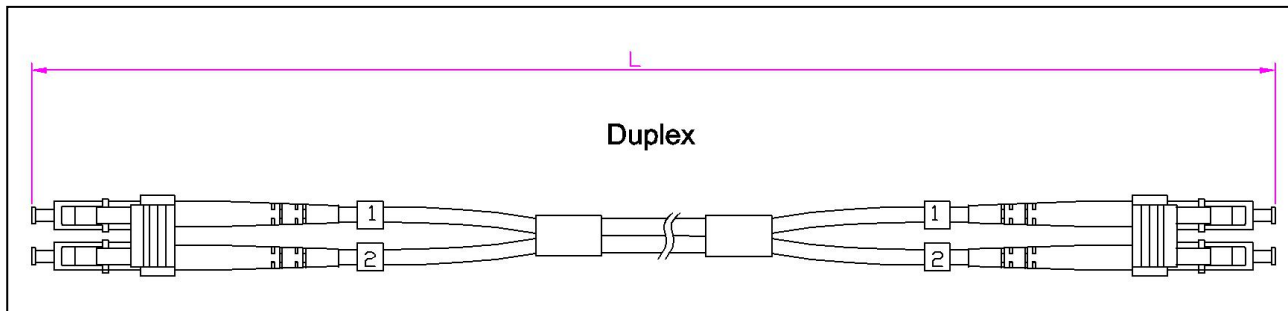

◆ Applications

- CATV
- Telecommunication networks
- Active device termination
- Local area networks(LANS)
- Data processing networks
- Test equipment
- Wide area networks(WANS)

◆ Features

- Low insertion loss and High reflection loss

URL: www.takfly.com

www.takfly.com.cn



TAKFLY COMMUNICATIONS CO., LTD.

ADD: Takfly Industrial Park, Tongsheng Community, Dalang Street, Longhua District, Shenzhen, 518109, China.

Tel: +86-755-28106528

Fax: +86-755-23777278

- Good exchange ability
- Good durability
- High temperature stability
- Standard: Telcordia GR-326-CORE

◆ Specifications :

End face type	PC、UPC and APC
Fiber type	SM (G652、G655、G657) ; MM (OM1-OM5)
Cable Diameter	2.0、3.0 or customized (Simplex/duplex)
Insertion loss	≤ 0.3 dB
Return loss	UPC SM ≥ 50dB 、 APC SM ≥ 60 dB、 PC MM ≥ 35 dB
Repeatability	≤ 0.1
Durability	≤ 0.2dB
Interchangeability	≤ 0.2dB
Tensile strength	>70N
Operating Temperature	-20℃~70℃
Storage Temperature	-40℃~80℃
Outer Sheath Material	PVC、LSZH、TPU
Bending radius (Static/Dynamic)	10D/20D
Length	Customized