

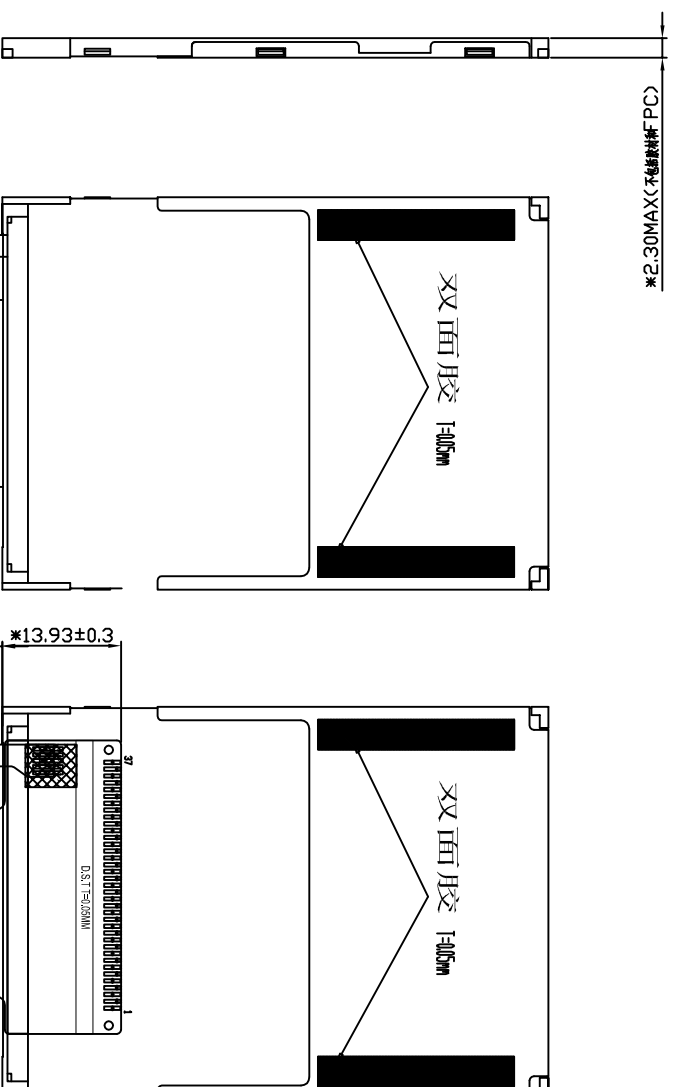


使用高8位

Pin	Pin Name
1	GND
2	GND
3	GND
4	GND
5	GND
6	IDVCC
7	/CS
8	RS
9	/WR
10	/RD
11	NC
12	NC
13	NC
14	NC
15	NC
16	LEDA
17	LEDK1
18	LEDK2
19	LEDK3
20	LEDK4
21	NC
22	GND
23	DB8
24	DB9
25	DB10
26	DB11
27	DB12
28	DB13
29	DB14
30	DB15
31	RESET
32	VCC
33	VCC
34	GND
35	GND
36	GND
37	GND

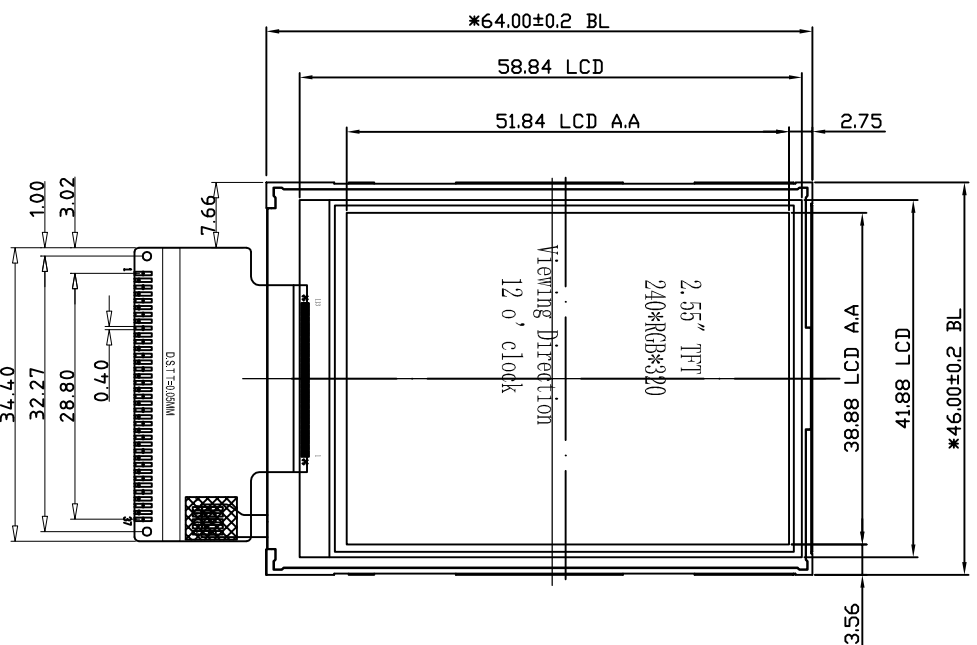

弯折参考图
展开出货

NOTE:

Display type: 2.6" a-si TFT Transmissive mode

Display mode: Transmissive

Interface Type: 18080 System 16 bit parallel

Viewing direction: 12 0' CLOCK

Driver IC: ILI9341

Input voltage: $3.0 \pm 0.2V$

Backlight: White LED(4-LED) Vled=3.2V Iled=60mA(max.)

Operating temperature: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Storage temperature: -30°C ~ $+80^{\circ}\text{C}$

“() ” Reference dimension

机壳开窗要求比TP V. A 区单边小0.3mm,且机壳泡棉不能压到 TP V. A

REV	DESCRIPTION	DATE
0		
1		
2		

MODEL NO.	TITLE	SCALE : 1:1	UNIT : mm
CUST.REF NO.	LCM	SHEET 1/1	Version 0
DRAWN BY	DATE	Unmarked Tolerance=0.1	
CHECKED BY	DATE		
APPROVE BY	DATE	PRD(3): 	