



KCD4-B3(防水)

额定电流、电压
15A 125VAC 20A 125VAC
16(8)A 125/250VAC T125
接触电阻: $\leq 50\text{m}\Omega$
绝缘电阻: $\geq 100\text{M}\Omega$
介电强度: $\geq 1500\text{VAC}/5\text{S}$
电气寿命: ≥ 10000 次



Rating:
15A 125VAC 20A 125VAC
16(8)A 125/250VAC T125
Contact resistance: $\leq 50\text{m}\Omega$
Insulation resistance: $\geq 100\text{M}\Omega$
Dielectric intensity: $\geq 1500\text{VAC}/5\text{S}$
Life: ≥ 10000 Cycles

序列号

电路图

端子规格

KCD4-B3-201

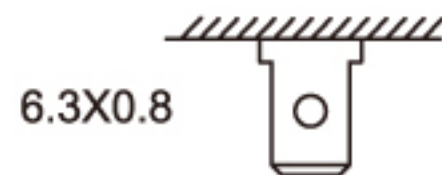

KCD4-B3-202

