


| NO.       | Name     |
|-----------|----------|
| 1         | DB0      |
| 2         | DB1      |
| 3         | DB2      |
| 4         | DB3      |
| 5         | DB4      |
| 6         | DB5      |
| 7         | DB6      |
| 8         | DB7      |
| 9         | E1       |
| 10        | R/W      |
| 11        | RS       |
| 12        | VLCD     |
| 13        | VSS      |
| 14        | VDD      |
| 15        | E2       |
| 16        | NC       |
| 17        | LED(+) { |
| 18        | LED(-) } |
| Interface | 6800     |

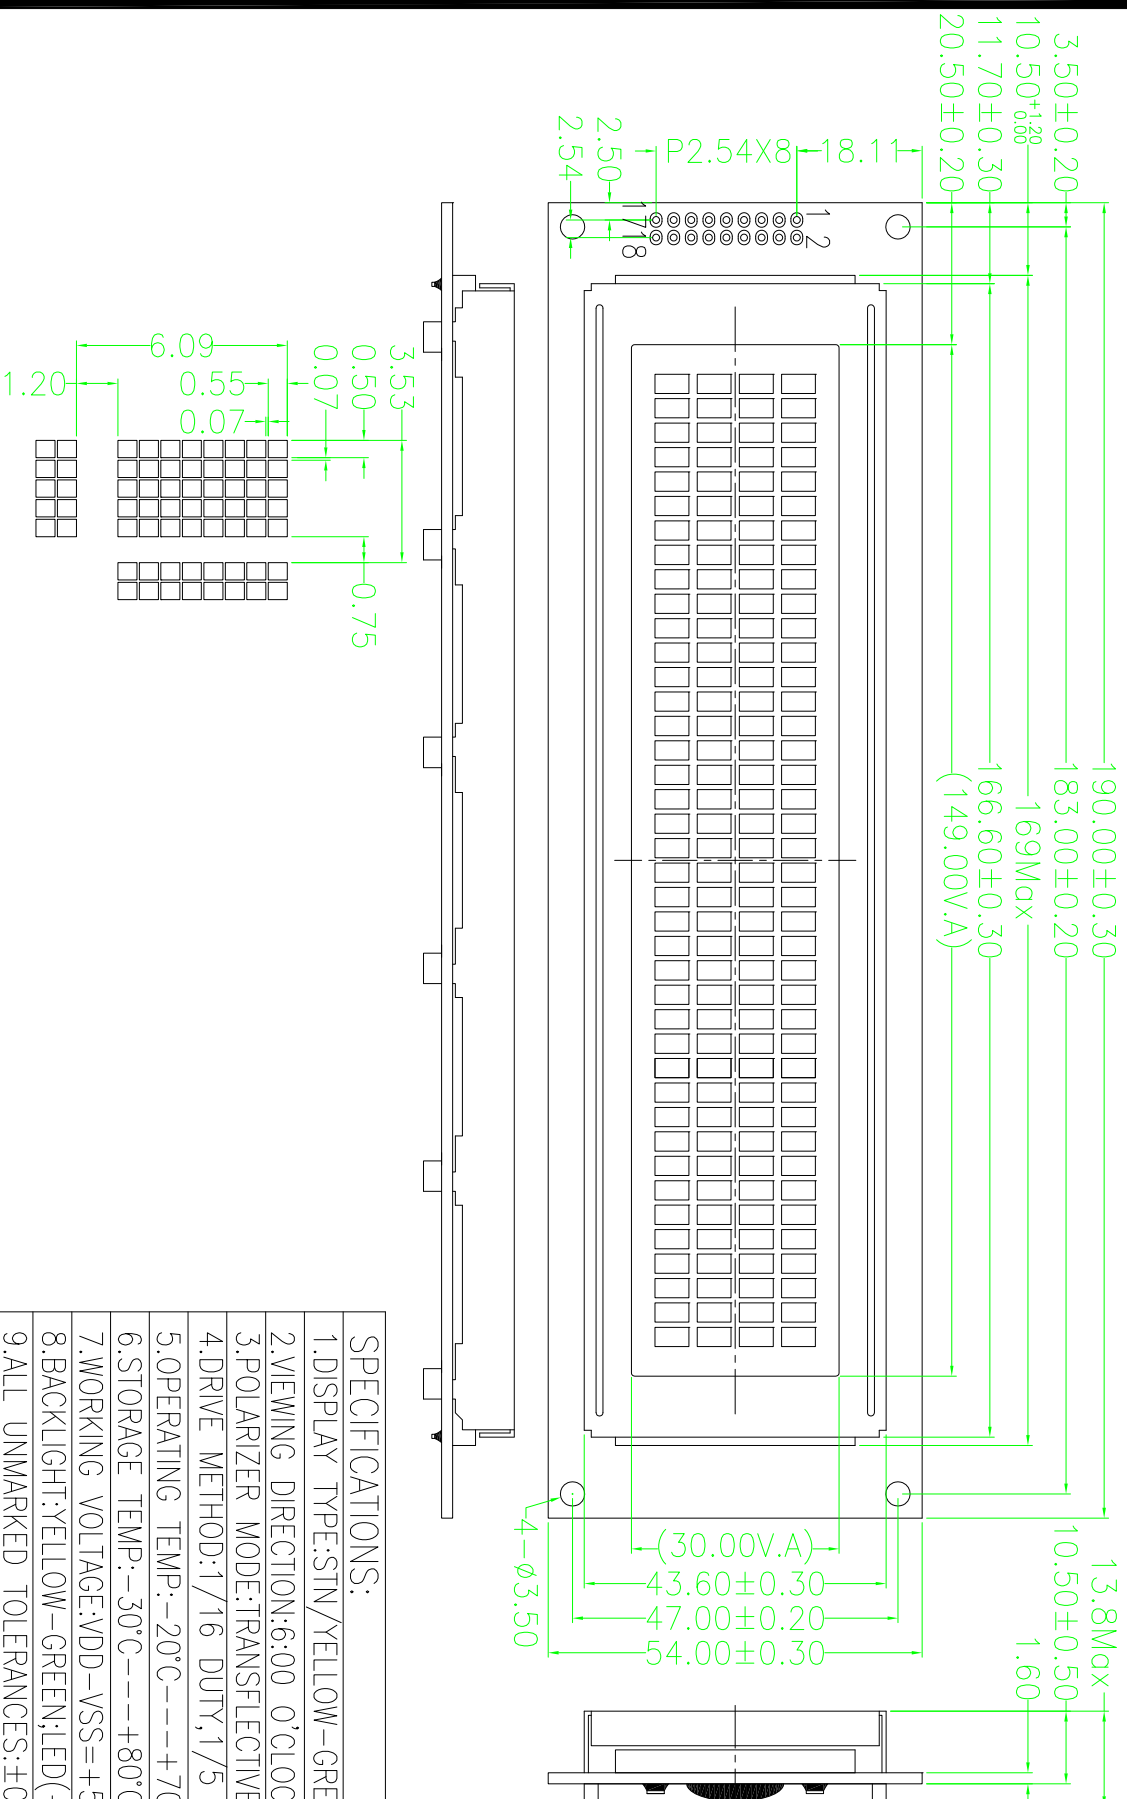

## SPECIFICATIONS:

- |                 |                                    |
|-----------------|------------------------------------|
| 1.DISPLAY       | TYPE:STN/YELLOW-GREEN              |
| 2.VIEWING       | DIRECTION:6:00 O'CLOCK             |
| 3.POLARIZER     | MODE:TRANSPARENT/POSITIVE          |
| 4.DRIVE METHOD: | 1/16 DUTY,1/5 BIAS                 |
| 5.OPERATING     | TEMP:-20°C---+70°C                 |
| 6.STORAGE       | TEMP:-30°C---+80°C                 |
| 7.WORKING       | VOLTAGE:VDD-VSS=+5.0VDC            |
| 8.BACKLIGHT:    | YELLOW-GREEN;LED(+)-LED(-)=+5.0VDC |
| 9.ALL UNMARKED  | TOLERANCES:±0.15mm/±0.5°           |

深圳市佳显电子技术有限公司  
Shenzhen Goodview Electronic Technology Co., Ltd



图例

绘图编号: LCM-SJXD4004ADYSYN

单位: mm

审核: \_\_\_\_\_

客户编号: Customer No.

日期: 2024-01-02

Approved by

图纸版号:  
Drawing Version:

Page No. 1 / -

[illegible]