




KCD1-B1

额定电流、电压
6A 250VAC/10A 125VAC T125
接触电阻: $\leq 50\text{m}\Omega$
绝缘电阻: $\geq 100\text{M}\Omega$
介电强度: $\geq 1500\text{VAC}/5\text{S}$
电气寿命: ≥ 10000 次

Rating:
6A 250VAC/10A 125VAC T125
Contact resistance: $\leq 50\text{m}\Omega$
Insulation resistance: $\geq 100\text{M}\Omega$
Dielectric intensity: $\geq 1500\text{VAC}/5\text{S}$
Life: ≥ 10000 Cycles

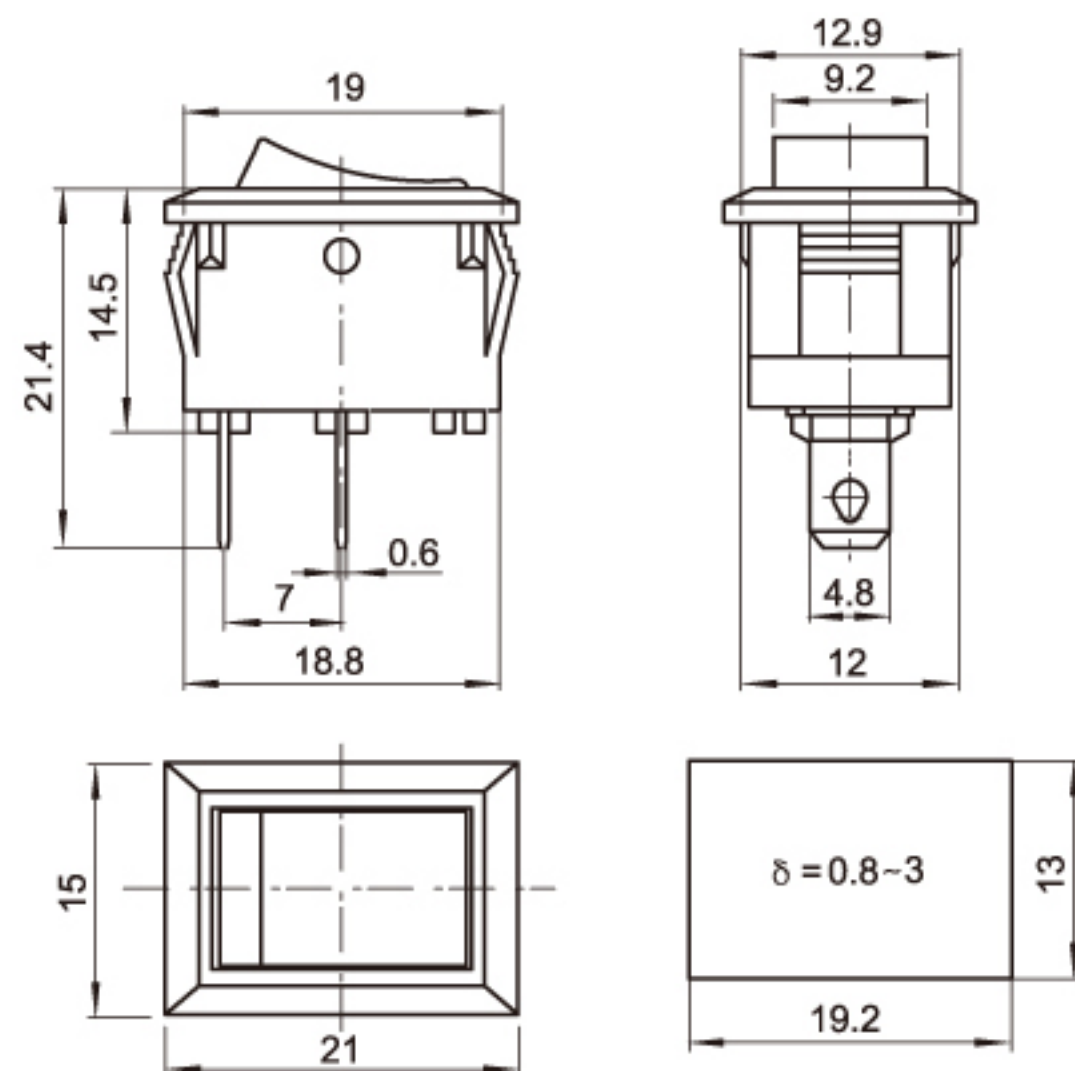

序列号	电路图	端子规格
KCD1-B1-101		
KCD1-B1-102		
KCD1-B1-103		