

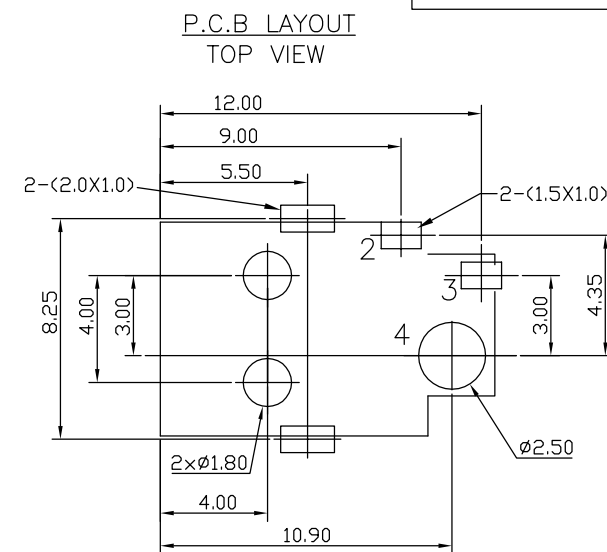


SECTION

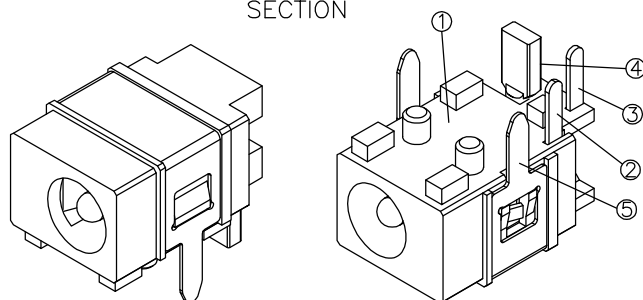

SCHEMATIC

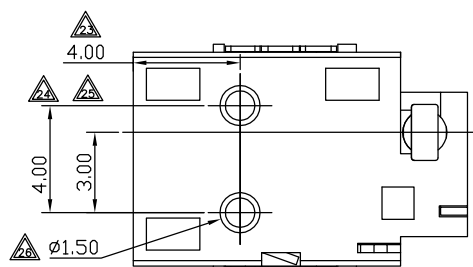

SPECIFICATION

- 1.Rating : DC 30V 1.0A;
- 2.Contact resistance: $\leq 0.03\Omega$;
- 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3–30N;
- 6.life test: 5,000 cycles.
- 7.Marked Δ are important dimensions.

5	SHELL	1	BRASS	———	Ni-Plating
4	PIN	1	ZINC ALLOY	———	Ni-Plating
3	CURVE PIEVE	1	BRASS	———	Ag-Plating
2	SPRING	1	BRONZE	———	Ag-Plating
1	HOUSING	1	PA66	———	———
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			 盛聰电子有限公司 SHENG CONG ELECTRONIC CO.,LTD		
General		Angle	CUSTOMER COPY	TITLE:	DC-JACK
X ± 0.50	X ± 3°				
X.X ± 0.30	X.X ± 2°	PART NO.	DJ-D023W-5		
X.XX ± 0.20	X.XX ± 1°				
PROJ: 		SCALE: 1:1	UNIT:mm	REV: A4	SHEET: 1 OF 1

						DESIGN	Jason	21'/01/28
						CHECK	Jason	21'/01/28
—————	0	21'/01/28	NEW	JASON	Max.hu	APPRO.	Max.hu	21'/01/28
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.			