







惠州宏利源电器有限公司

HONYONE ELECTRICAL APPLIANCE CO.,LTD

PB26



菲林片安装方向示意图

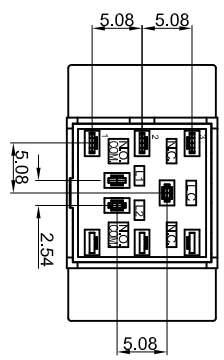

SPECIFICAIONS:


- Circuit :SPDT
- Rating :0.4VA 28VDC
- Contact resistance :100mΩ Max
- Insulation resistance :DC500V 100MΩ Min.
- Withstand voltage :AC 500V for 1 minute ;
- Operating force :200±100gf ;
- Total travel :2.2±0.5mm
- Mechanical life :Over 200,000 cycles ;
- Electrical life :Over 30,000 cycles
- Manual welding :350°C for 3 seconds
- Operating temperature :-25°C~+70°C

MATERIAL:

- Base:PA66,UL rated:94 V-2 Min.
- Cap:PC
- Terminal:Brass, Golden plated;

CIRCUIT

P.C.B. LAYOUT

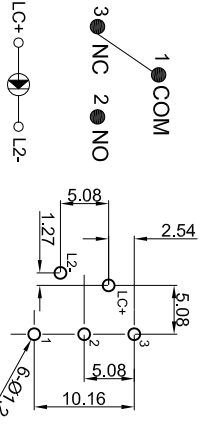

Note:
1.This product is strictly prohibited wave soldering and reflow soldering,please use the manual welding processing, temperature of 350°±5°and time is 3±0.5 seconds;
2.After the product is welded on the PCB board,it is prohibited to use any solvent to clean the PCB board,and avoid the influence of the inner product.

			公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT		mm.	
			视角 VIEWING ANGLE		比例尺 SCALE	NONE		日期 DATE	图 号 DRAWING NO			
								2017.07.29	PB26-13M-E-WT-W-N			
									PB26-13M-E-WT-W-N_CP_A0			
A0	New Issue	2017.07.29										
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	核准 APPROVED BY	核对 CHECKED BY	Sinc	绘图 DRAWN BY	姜庆勇				