

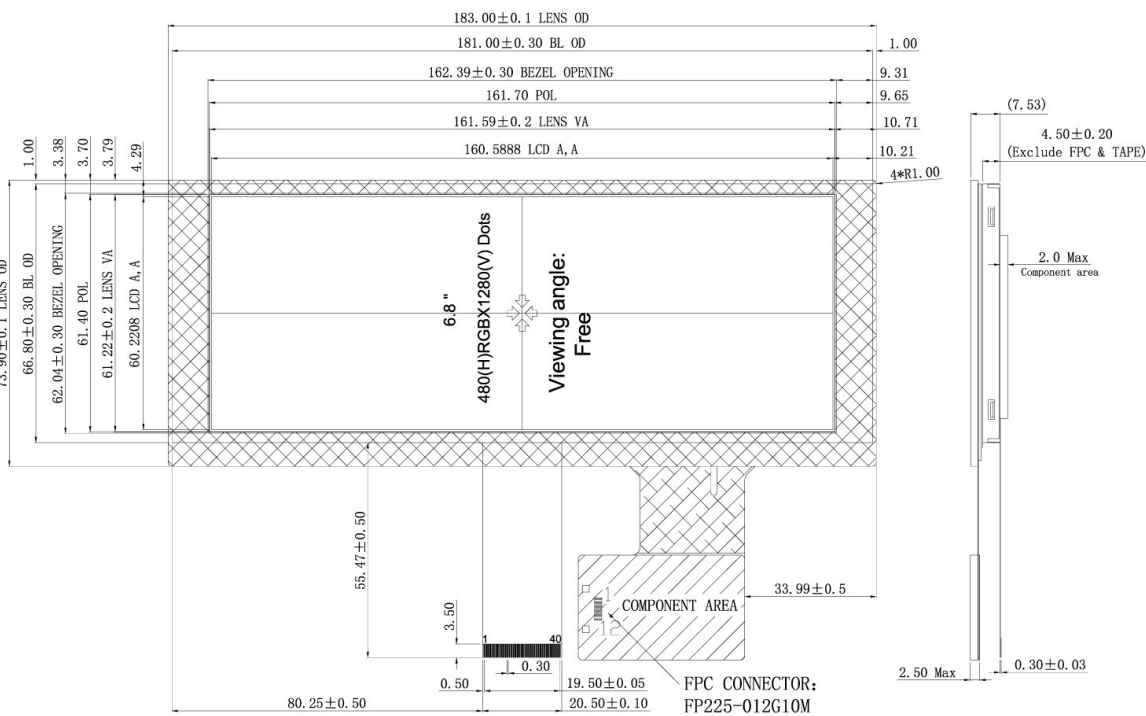


Pin Assignment	
NO.	SYMBOL
1	VCOM
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB (VD
7	GND
8	R0-
9	R0+
10	GND
11	R1-
12	R1+
13	GND
14	R2-
15	R2+
16	GND
17	CLK-
18	CLK+
19	GND
20	R3-
21	R3+
22	GND
23	CSB
24	SDA
25	GND
26	SCL
27	NC
28	IFSEL (GN
29	NC
30	GND
31	LEDA
32	LEDA
33	LEDA
34	LEDK
35	LEDK
36	GND
37	XR (NC)
38	YD (NC)
39	XL (NC)
40	YU (NC)

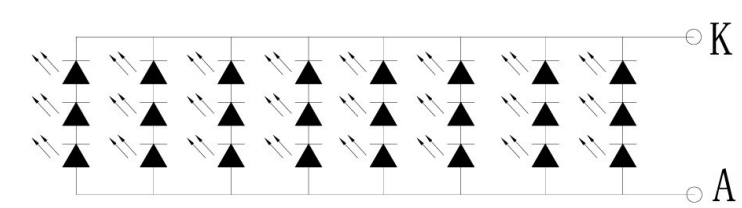

CTP PIN			
PIN	NAME	PIN	NAME
1	GND	7	NC
2	D+	8	NC
3	D-	9	NC
4	5V	10	NC
5	GND	11	NC
6	GND	12	NC

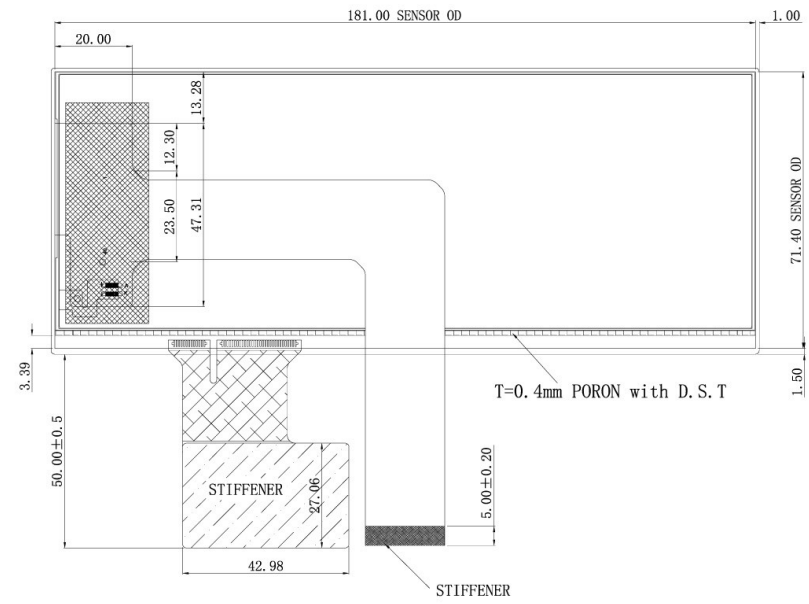

LED CIRCUIT DIAGRAM:



东莞市精进光电有限公司

Jingjin Optoelectronics Co., Ltd

DRAWN		UNIT	Customer NO.
		mm	
CHECKED	SCALE	NO.	Part NO. JTA0686AMD1
	1:1	1/1	
APPROVED	DATE	VERSION	TITLE OUTLINE
		A	

- NOTES:
- 1. Display type: 16.7M color TFT/Transsmive
 - 2. Viewing direction: FREE
 - 3. Operating temp. : -20°C~+70°C
 - 4. Storage temp. : -30°C~+80°C
 - 5. Driver IC OF LCD: EK79030
 - 6. Driver IC OF CTP: ILI2301S+ILIM2V
 - 7. Dimensions with mark "()" arde referenced.
 - 8. Match connector : F35402S0RA