


光伏4.0线端连接器 PV 4.0 Cable Connector

产品规格 Product Specifications


绝缘材料 Insulation material	PPE/PA	安全等级 Safety degree	II
额定电流 Rated current	30A	阻燃等级 Flame class	UL94-V0
额定电压 Rated voltage	1000VDC	插入力/拔出力 Insertion force/Withdrawal force	≤ 50N / ≥ 50N
测试电压 Test voltage	6kV(50Hz,1min)	环境温度范围 Ambient temperature range	-40°C...+85°C(IEC)
连接器接触电阻 Typical contact resistance	≤ 0.25 mΩ	适配电线规格 Suitable cable cross sections	1.5~6mm ² /16~10AWG
金属导体材料 Contact material	铜,镀锡 Copper,Tin plated	连接方式 Connecting system	压接 Crimp connection
保护等级 Degree of protection	IP67	螺帽锁紧力 Nut cap locking force	1.5~1.8Nm
过压等级 Overvoltage category/Pollution degree	CATIII/2	温度上限 limiting temperature	Upper 110°C(IEC)

图示: Drawing:

公连接器Male Connector

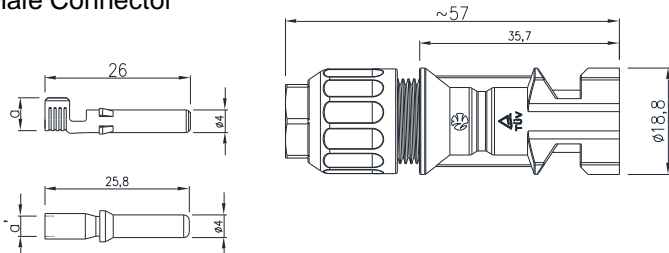

母连接器Female Connector

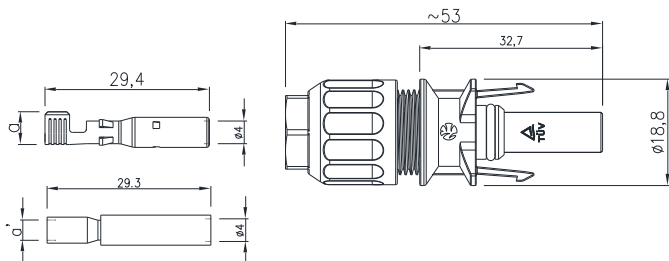

母端Female	公端Male	电流Current	a	a'	适配电线规格 Cable Size
料号Part No.		Amps			
4C4250	4C4251	30	4.05	Ø2.1	1.5/2.5mm ² / 16/14AWG
4C4000	4C4001	30	5.8	Ø2.8	4.0/6.0mm ² &10/12AWG
4C6000	4C6001	30	5.8	Ø3.4	4.0/6.0mm ² &10/12AWG