
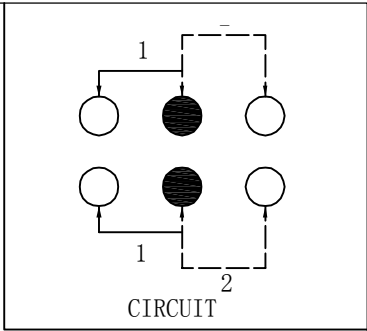


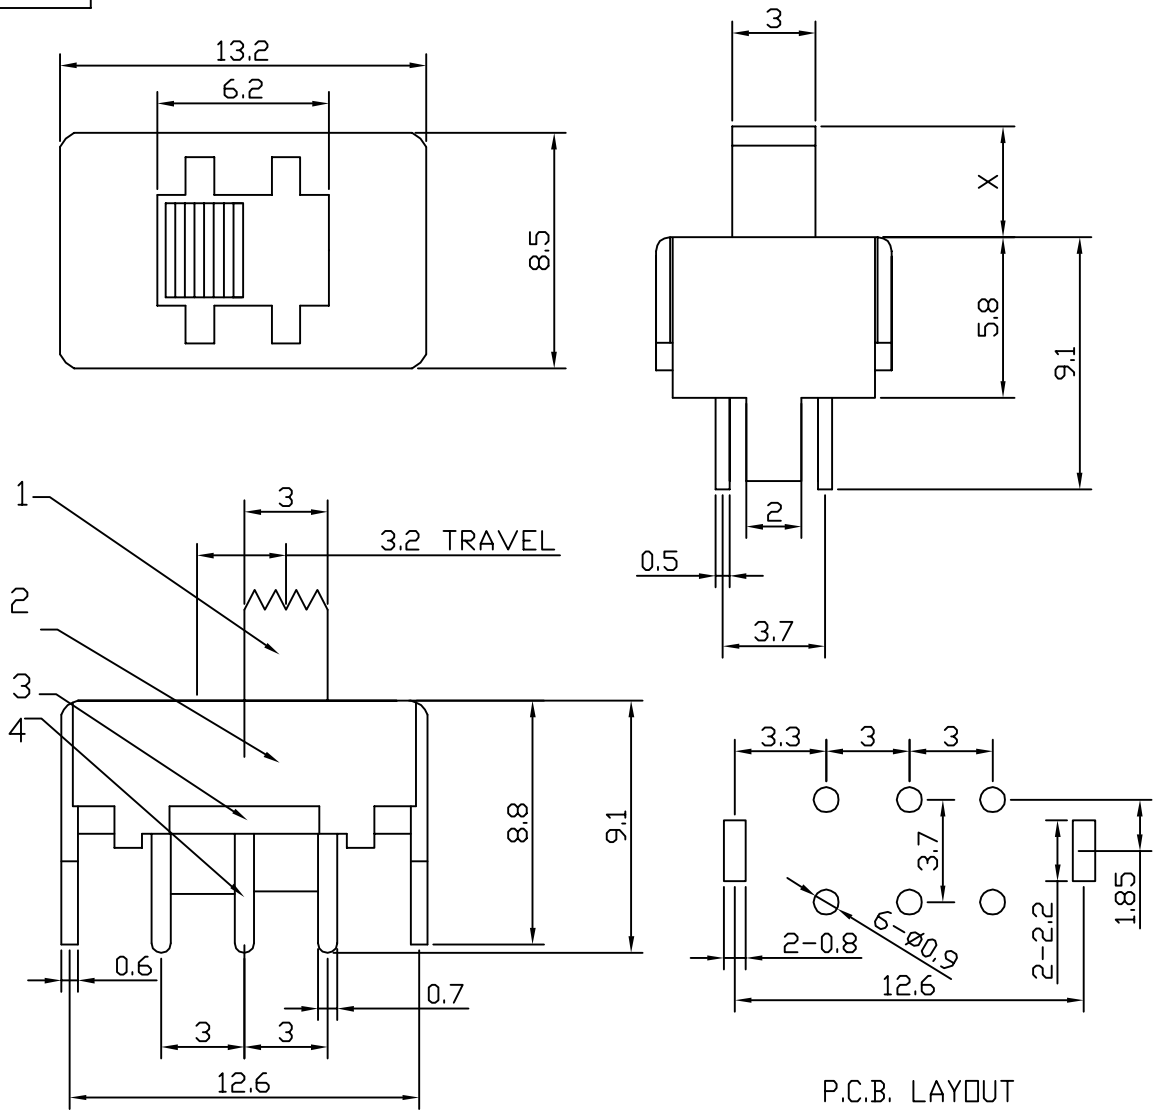

- KEY SPECIFICATION:**
- 1. RATING : DC 50V 0.3A
 - 2. FNCTION:2P2T
 - 3. CONTACT RESISTANCE:100m0hm MAX
 - 4. INSULATION RESISTANCE:100M0hm MIN
 - 5. DIELECTRIC STRENGTH:AC 500V(50-60HZ)FOR 1Min
 - 6. OPERATING FORCE:120gf±50gf
 - 7. OPERATING LIFE:5,000CYCLES
 - 8. OPERATING TEMPERATURE:-16°+60°

8								TOLERANCE		TOLERANCE	
7								<5	±0.2	>50	±0.5
6	CONTACT	BRASS STRIP	2	AG PLATED		DATE		5~30	±0.3	角度	±3°
5	SPRING	STEEL WIRE	1	NATURAL		ISSUE		30~50	±0.4		
4	TERMINAL	BRASS STRIP	6	AG PLATED	TITLE:SLIDE SWITCH			UNIT:mm		DRWG. NO. :	
3	BASE	PHENOL IC RESIN	1	NATURAL				SCALE:4:1		DWN	
2	SHELL	STEEL STRIP	1	NI PLATED	MODEL NO:SS-22F04					CHK'D	
1	KONB	POM	1	BLACK						APPD.	
NO.	DESCRIPTION	MATERIAL	QTY	PLATING	DONGGUAN JINBAOLI ELECTRONICS CO.,LTD						