


UL10064

BORT cable

RoHS & REACH compliant

环保引领未来

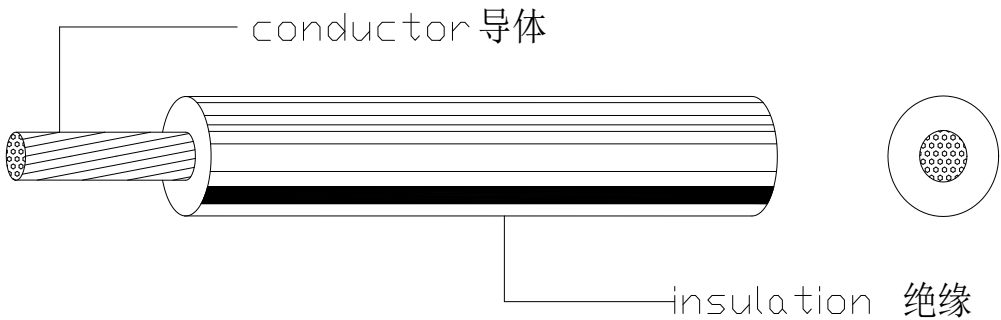

PRODUCT DESCRIPTION

- ★ Rated temperature: 105°C
- ★ Rated voltage: 30V
- ★ According to: UL Subject 758, UL1581, C22.2
- ★ Solid or stranded, SPTCA/TPTCA/tinned conductor
- ★ PFA/FEP insulation
- ★ Passes UL VW-1 & CSA FT1 vertical flame test
- ★ Uniform insulation thickness of wire to ensure easy stripping and cutting
- ★ Sound broadcast, audio, instrumentation & computer

产品说明

- ★ 额定温度: 105°C
- ★ 额定电压: 30V
- ★ 执行标准: UL758, UL1581, C22.2
- ★ 导体使用单根或绞合镀银锡铜合金或镀锡锡铜合金或镀锡铜丝
- ★ PFA或FEP绝缘
- ★ 通过UL VW-1以及CSA FT1垂直燃烧测试
- ★ 绝缘厚度均匀 易剥 易裁
- ★ 用于广播, 视听设备, 计算机线等

Conductor		Finished product	
AWG	NO. of Cond	Jacket Thick.	Outside Thick.
	No./mm	mm	mm
40	7/0.03	0.045	0.18
40	7/0.03	0.06	0.21
40	7/0.03	0.06	0.21
38	7/0.04	0.045	0.21
38	7/0.04	0.06	0.24
38	7/0.04	0.06	0.24
36	7/0.05	0.06	0.28
36	19/0.03	0.06	0.28
36	19/0.03	0.06	0.28
34	7/0.06	0.07	0.32
34	19/0.04	0.06	0.32
32	7/0.08	0.07	0.38
32	19/0.05	0.07	0.38
30	7/0.10	0.10	0.50
30	19/0.06	0.10	0.50
28	7/0.127	0.11	0.60
28	19/0.08	0.10	0.60

博尔特（漳州）电缆有限公司