

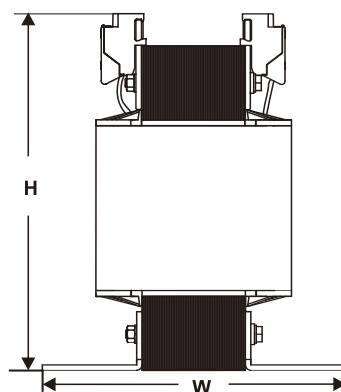
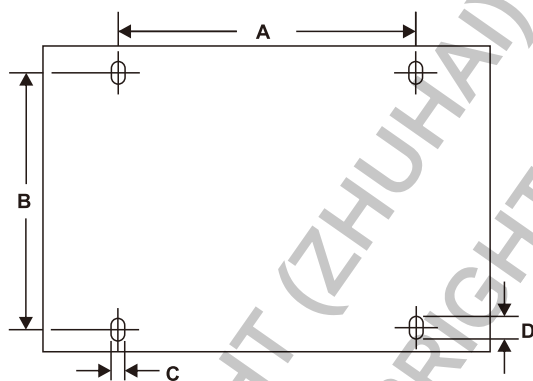


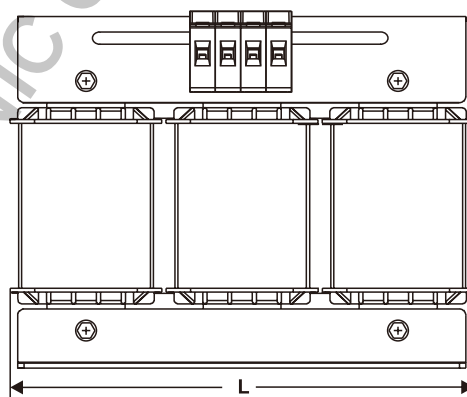

THREE PHASE CONTROL TRANSFORMERS (TPCT-02 SERIES)

Features:

- The three phase control transformers are designed and built to meet the US and international safety standards.
- Power – 300-15KVA.
- Frequency – 50/60 Hz.
- Temperature rise 70°C max @40°C ambient.
- Insulation class – Class B, F&H available.
- Dielectric strength – 4000Vrms.
- Degree of protection – IP00.
- Horizontal type can be selected.
- Fuse and fuse holder can be installed upon requested.
- Custom versions upon requested.
- According to:

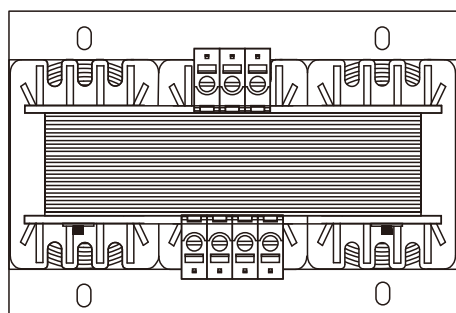

Part Number	Rated Power (VA)	Dimensions (mm)							WT.(kg)
		L	W	H	A	B	C	D	
TPCT-02-300	300	150.00	100.00	120.00	90.00	80.00	7.00	11.00	6.00
TPCT-02-500	500	185.00	115.00	145.00	122.00	98.00	7.00	11.00	8.50
TPCT-02-1000	1000	230.00	130.00	205.00	150.00	90.00	10.00	30.00	14.00
TPCT-02-1500	1500	230.00	140.00	205.00	150.00	100.00	10.00	30.00	18.50
TPCT-02-2000	2000	230.00	150.00	205.00	150.00	110.00	10.00	30.00	20.00
TPCT-02-2500	2500	260.00	145.00	235.00	150.00	110.00	10.00	30.00	25.00
TPCT-02-3000	3000	260.00	155.00	235.00	150.00	115.00	10.00	30.00	28.00
TPCT-02-3500	3500	300.00	150.00	265.00	150.00	110.00	10.00	30.00	37.00
TPCT-02-4000	4000	300.00	160.00	265.00	150.00	120.00	10.00	30.00	40.00
TPCT-02-5000	5000	300.00	170.00	265.00	150.00	130.00	10.00	30.00	48.00
TPCT-02-6000	6000	300.00	180.00	265.00	150.00	140.00	10.00	30.00	58.00
TPCT-02-7000	7000	360.00	240.00	310.00	250.00	140.00	14.00	40.00	68.00
TPCT-02-8000	8000	360.00	250.00	310.00	250.00	150.00	14.00	40.00	75.00
TPCT-02-10K	10K	360.00	270.00	310.00	250.00	160.00	14.00	40.00	100.00
TPCT-02-12K	12K	385.00	275.00	330.00	300.00	160.00	14.00	40.00	110.00
TPCT-02-15K	15K	385.00	285.00	330.00	300.00	170.00	14.00	40.00	120.00