

SWITCH / PUSH SWITCH

ES40-P
IP67 level

Sealed sub-miniature Push Button Switches
UP to 1A 120VAC or 28VDC

PDF Download

Get Information



ZOOM IN

Feature

- I Sealed sub-miniature push switch, internal o-ring and epoxy terminals
- I SPST, SPDT
- I Thro-hole and right angle PC terminals
- I Unthreaded bushing type, PCB mounting
- I IP67 water proof level


Specification

- I RATING: 1A 120VAC or 28VDC (silver plated) ;0.4VA at 20VAC or DC (gold plated)
- I Initial contact resistance: 20m Ohms max.
- I Insulation resistance: 1,000M Ohms min.
- I Dielectric strenght: 1,500VAC for 1 minute
- I Electrical life: 30,000 cycles
- I Operating Temperature -30~80 degree C


How to order:

ES-21	CV	2	N	C	Q		H
SERIES & FUNCTION STRAIGHT PC ES-21 SPST OFF-(ON) ES-22 SPDT ON-(ON) HORIZONTAL RIGHT ANGEL PC ES-21A SPST OFF-(ON) ES-22A SPDT ON-(ON) VERTICAL RIGHT ANGEL PC ES-21B SPST OFF-(ON) ES-22B SPDT ON-(ON)	CAP ☐ NO CAP CV DIA. 5.08 CV1 DIA. 7.62	CAP COLOR ☐ NO REQUIRED 1 WHITE 2 BLACK 3 RED	BUTTON ☐ STANDARD 5.46 HEIGHT SP 3.00 HEIGHT FP FLUSH TYPE	TERMINATION C PC THRO-HOLE RIGHT ANGLE PC TERMINAL WITHOUT THIS CODE	CONTACT PLATING Q SILVER PLATED G GOLD OVER SILVER R GOLD PLATED OVER NICKEL (STANDARD)	BRACKET & SUPPORT STRAIGHT PC AS WITH BRACKET ☐ WITHOUT BRACKET THIS CODE ONLY AVAILABLE FOR STRAIGHT PC TYPE ONLY	ROHS H ROHS


Item

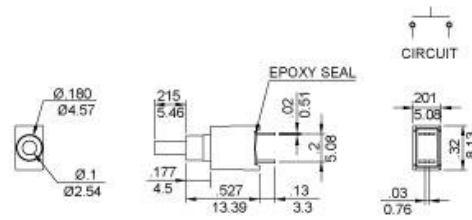


ES-21-C
(WITHOUT BRACKET)

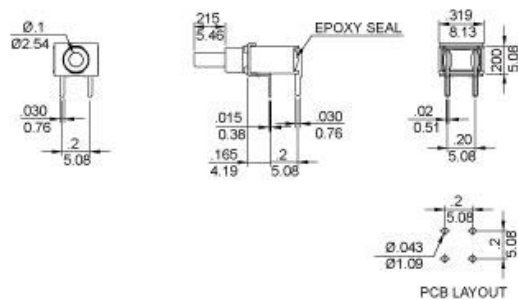

ES-21A

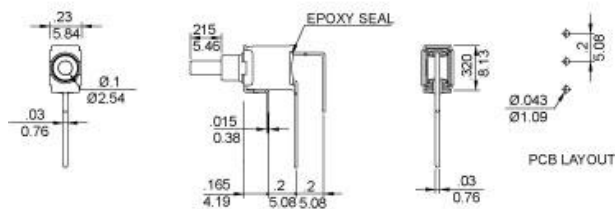

ES-21B

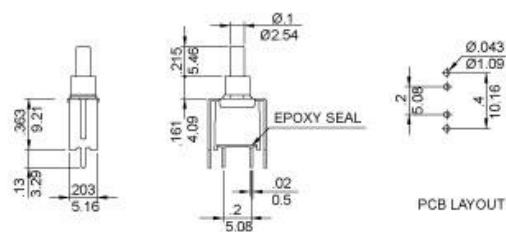

ES-21-CR-A5

 Start Print

Canal Components Inc. Tel:+886-2-29161263 Fax:+886-2-29117574
Copyright ©2009 Canal Components Inc.. All rights reserved.