
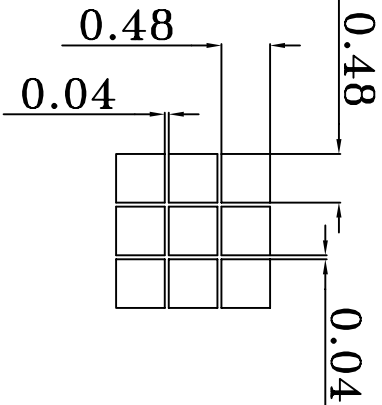
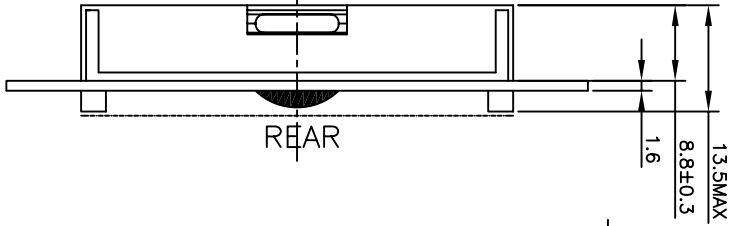


REV.	CHANGE CONTENT	BY	DATE

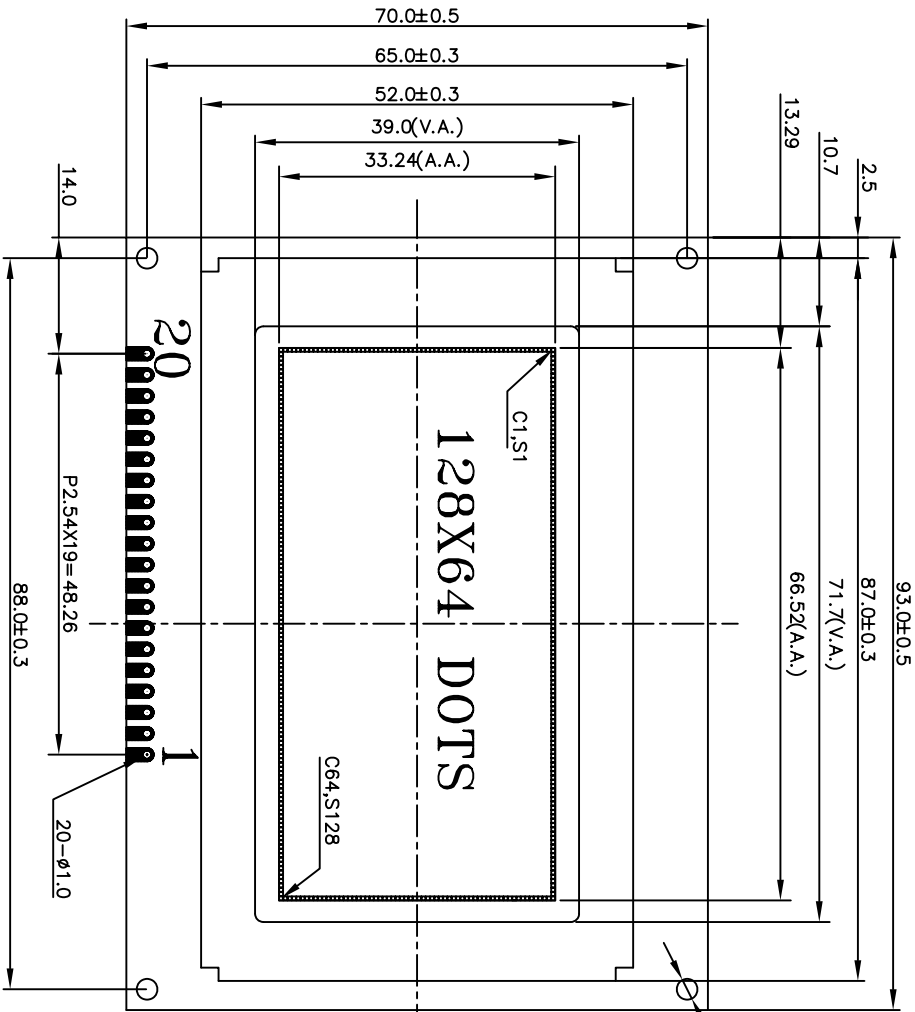

LCD PIN	IC PIN
C1~C64	IC1:C1~C64
S1~S64	IC2:S1~S64
S65~S128	IC3:S1~S64

PIN NO.	1	2	3	4	5	6	7~14	15	16	17	18	19	20
SYMBOL	V _{SS}	V _{DD}	V _O	R _S	R/W	E	DB0~DB7	CS1	CS2	/RST	V _{EE}	BL+	BL-

NOTE:

1. DISPLAY TYPE : FSTN – NEGATIVE – TRANSMISSIVE
2. VIEWING DIRECTION : 6:00
3. OPERATING VOLT. : V_{OP} =11.0V
4. OPERATING TEMP. : -20°C ~+70 °C
5. STORAGE TEMP. : -30°C ~ +80°C
6. DRIVE METHOD : 1/64 Duty, 1/9Bias
7. LED BACKLIGHT : Yellow-Green, Bottom-Light, V_{LED} =5.0V
8. POWER SUPPLY FOR LOGIC : V_{DD}=5.0V
9. DRIVE IC; SBN0064G, SBN6400G



深圳市华远显示器件有限公司

DESIGN	DAP	20110930	STANDARD	REV. : A	SCALE : -
CHECKED			TECHNOLOGY	PROJECTION:	UNIT : MM
APPROVED			Q.A		SHEET : 1/1

DRAWING No. : HYG1286406C-TF62L-VAB
DRAWING TITLE: LCM DRAWING
FILE NO.: 8