



RoHS COMPLIANT

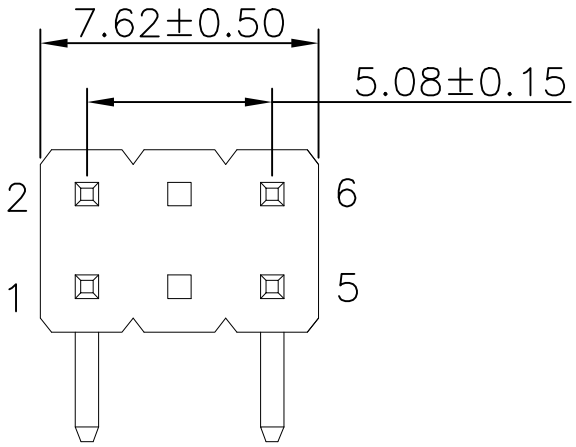

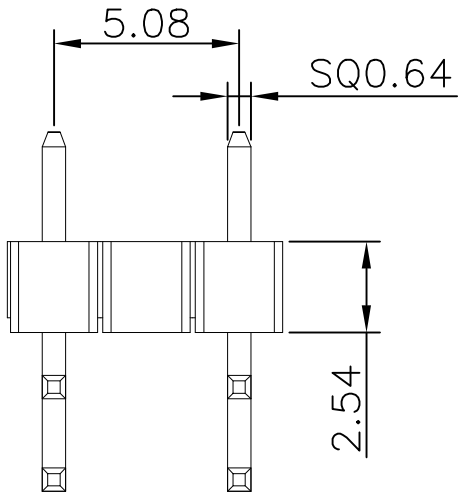

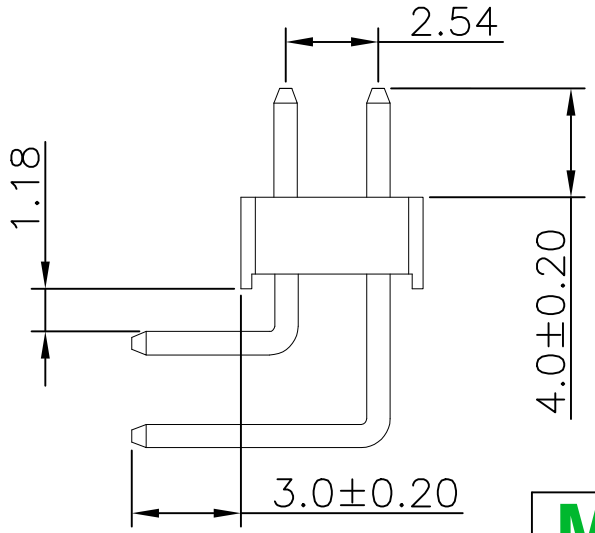

NOTES:
1.HOUSING MATERIAL: PA9T UL94V_0 .
2.TERMINAL MATERIAL: BRASS. GOLD FLASH.
SPECIFICATIONS:
1. ELECTRICAL CHARACTERISTICS:
   1-1. RATING CURRENT: 3.0A AC/DC
   1-2. CONTACT RESISTANCE: 30mΩ MAX.
   1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
   1-4. INSULATION RESISTANCE: 1000MΩ MIN.
2. AMBIENT TEMPERATURE RANGE: -40°C~+105°C

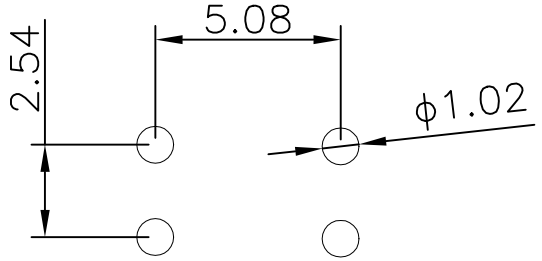

RECOMMENDED PCB LAYOUT

M&T High quality connectors

MTCONN ELECTRONICS CO.,LTD

DIM	TOL	DEC	TOL
X.	±0.50	X.'	±2'
X.X	±0.35	X.X'	±2'
X.XX	±0.25	X.XX'	±--
X.XXX	±0.15	X.XXX'	±--

DRWN: SAM 2024-10-17	PART NO.: MTPH45-203GB0-ABA00	
CHKD: ALAN 2024-10-17	TITLE: 2.54MM DOUBLE ROW EMPTY THE 3P AND 4PIN	
APPD: WILLIAM 2024-10-17	DRAWING NO.: MTPH45-203GB0-ABA00	
SHEET: 1/1	UNIT: mm / SCALE: N/A / SIZE: A4 / REV: C	