


# UL1095

# BORT cable

RoHS & REACH compliant

环保引领未来

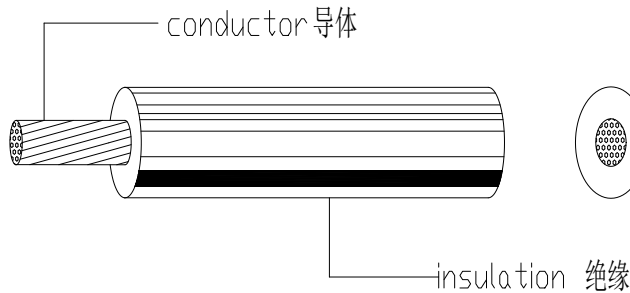

## PRODUCT DESCRIPTION

- ★ Rated temperature: 80 °C
- ★ Rated voltage: 300V
- ★ According to: UL subject 758, UL 1581
- ★ Solid or Stranded, tinned or bare copper conductor 30-16AWG
- ★ PVC insulation
- ★ Passes UL VW-1 & CSA FT1 Vertical flame test
- ★ Uniform insulation thickness of wire to ensure easy stripping and cutting
- ★ Environmental testing pass RoHS
- ★ Internal wiring of appliances or electronic equipment

## 产品说明

- ★ 额定温度: 105°C
- ★ 额定电压: 600V
- ★ 执行标准: UL758, UL1581, C22.2
- ★ 导体使用单根或绞合30--2/0AWG镀锡或裸铜丝
- ★ 聚氯乙烯绝缘
- ★ 通过UL VW-1以及CSA FT1垂直燃烧测试
- ★ 绝缘厚度均匀 易剥 易裁
- ★ 用于一般电子, 电器设备内部连线

UL TYPE	Gauge	Construction	Conductor	Insulation	Wire O.D (mm)	Max Cond	Standard Package	
	(AWG)	(no/mm)	Outer	Thickness		Resistance		
			Diameter (mm)	(mm)		(Ω/kft, 20°C)	FT/ROLL	ROLL
UL1095	26	7/0.16	0.48	0.3	1.1	45.8	2000	610
	24	11/0.16	0.61		1.25	28.7		
	22	17/0.16	0.76		1.4	18.1		
	20	21/0.178	0.94		1.6	11.2		
	18	16/0.254	1.17		1.8	7.06	1000	305
	16	26/0.254	1.49		2.1	4.45		

(漳州) 电缆有限公司