
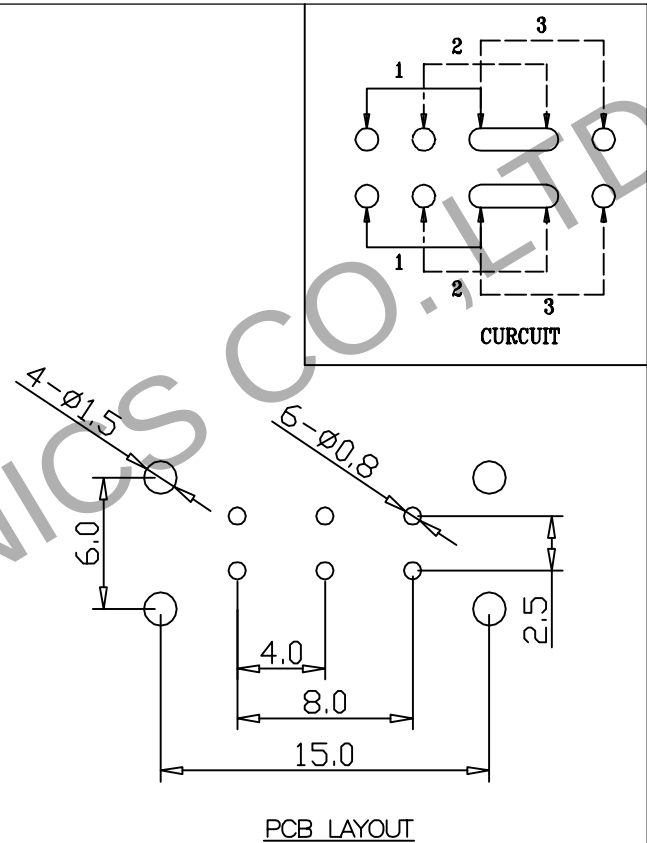
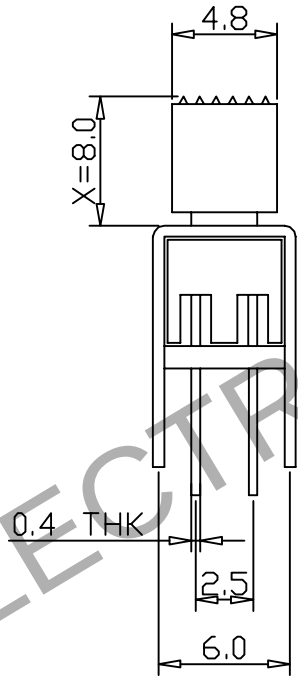


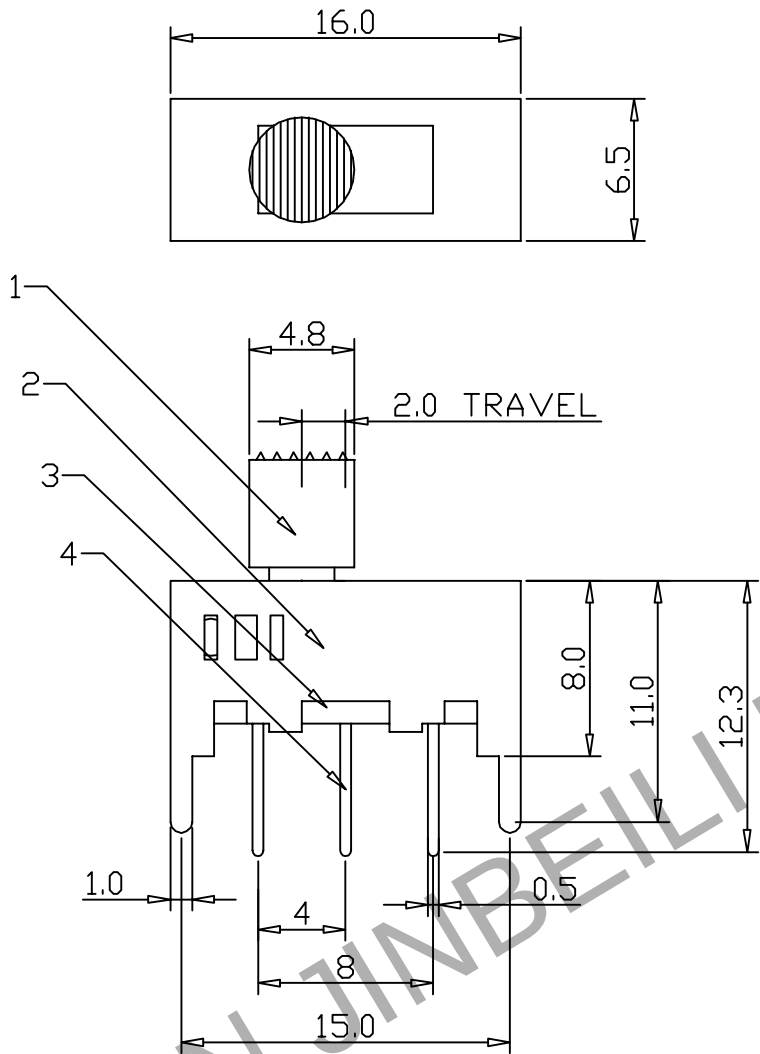

- KEY SPECIFICATION:
- 1.RATING:DC 50V 0.3A
 - 2.FNCATION:2P3T
 - 3.CONTACT RESISTANCE:100m OHM MAX
 - 4.INSULATION RESISTANCE:100M OHM MIN
 - 5.DIELECTRONIC STRENGTH:AC 500V FOR 1MIN
 - 6.OPERATING FORCE:250gf±100gf
 - 7.OPERATING LIFE:10,000CYCLES
 - 8.OPERATING TEMPERATURE:-20°C~+70°C

8					TOLERANCE UNLESS SPECIFIED				
7	STEEL BALL	STAINLESS STEEL	1	NATURAL					
6	CONTACT	BRONZE STRIP	2	Ag PLATED	WITHIN 1.5:±0.1mm OVER 1.5: ±0.2mm ANGLES: ±2°				
5	SPRING	STELL WIRE	1	NATURAL		ISSUE	DATE	DESCRIPTIONS	APPD.
4	TERMINAL	BRASS STRIP	8	Ag PLATED					
3	BASE	PHENOL IC RESIN	1	NATURE	TITLE:SLIDE SWITCH		UNIT:mm	DRWG. NO.:	
2	SHELL	SPCC STRIP	1	Ni PLATED	MODEL NO: SS-23D01AT8.0		SCALE:4:1	DWN	
1	KNOB	POM	1	BLACK				CHK'D	
NO.	DESCRIPTION	MATERIAL	QTY	PLATING	DONGGUAN JINBAOLI ELECTRONICS CO.,LTD			APPD.	