

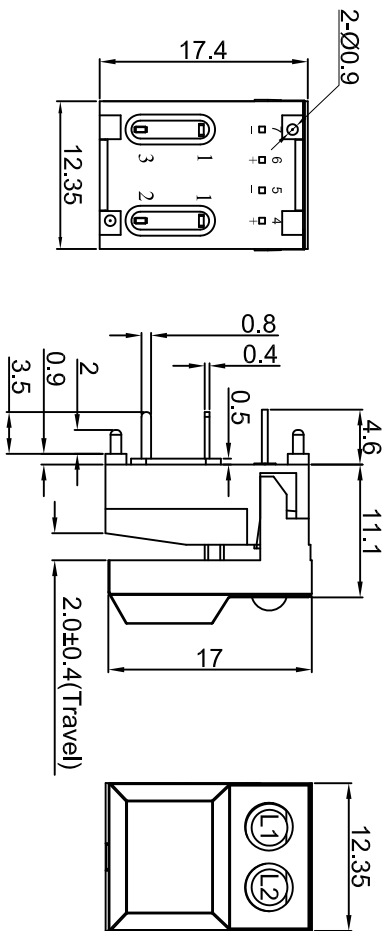



PB86



- Specifications
- Circuit :SPDT
 - Current rating :12mA
 - Voltage rating :24VDC
 - Dielectric withstanding voltage:250VAC for 1 minute
 - Contact resistance :50m Ω Max. (Initial)
 - Insulation resistance :100M Ω Min.
 - Operating force :170 $\pm$ 50gf
 - Total travel :2.0mm $\pm$ 0.4mm
 - Mechanical life :Over 50,000 cycles
 - Electrical life :Over 10,000 cycles
 - Solder specifications :256 $\pm$ 5 $^{\circ}$ C for 5 $\pm$ 0.5 seconds
 - Function :Momentary
 - Operating temperature :-20 $^{\circ}$ C ~ +70 $^{\circ}$ C



2-Ø1.1

P.C.B. Layout

符号	颜色	1.8	2.2	2.4	20	120	567	575	
RG	绿色	1.8	2.2	2.4	20	120	567	575	O Orange 橘色
W	白色	1.8	2.2	2.4	20	120	620	625	F Carnation Pink 粉红
U	蓝色	2.8	3.2	3.5	20	120	460	470	C Carmine 洋红
G	黄绿色	1.8	2.2	2.4	20	120	567	575	P Pansy 紫罗兰
O	橙色	1.8	2.2	2.4	20	120	600	610	Y Yellow 黄色
R	红色	1.8	2.2	2.4	20	120	620	625	W White 白色
灯发光颜色X		最小	一般	最大	最大	最大	最大	最大	U Blue 蓝色
额定电压(V)		一般	一般	一般	一般	一般	一般	一般	R Red 红色
额定电流(mA)		一般	一般	一般	一般	一般	一般	一般	G Green 绿色
额定电压(V)		一般	一般	一般	一般	一般	一般	一般	B Black 黑色
额定电压(V)		一般	一般	一般	一般	一般	一般	一般	A Gray 灰色
额定电压(V)		一般	一般	一般	一般	一般	一般	一般	CAP COLOR (Y)

MATERIAL

Base:PBT, UL rated: 94V-2 Min.;

Cap: ABS;

Terminal: Phosphor bronze, Golden plated.

		公差 TOLERANCES		.X $\pm$ 0.3		.XX $\pm$ 0.15		角度 ANGLE		$\pm 1^{\circ}$		单位		DIMENSION UNIT		mm.	
		视角				比例尺		NONE		日期		品名		TITLE		图号	
		VIEWING ANGLE				SCALE				DATE						DRAWING NO	
A1	电路图变更									2015.10.07			PB86-A2-Y-XX-40				
A0	New Issue												PB86-A2-Y-XX-40				
版本 VER.	变更说明 CHANGE DESCRIPTION												PB86-A2-Y-XX-40_CP_A1				