SINGLE PHASE CONTROL TRANSFORMERS (SPCT-01 SERIES)

Features:

- The single phase control transformers are designed and built to meet the US and international safety standards.
- Power – 40VA-8000VA.
- Frequency – 50/60 Hz.
- Temperature rise 70°C max @40°C ambient.
- Insulation class – Class B, F&H available.
- Dielectric strength – 4000Vrms.
- Degree of protection – IP00.
- Horizontal type can also be selected.
- Fuse and fuse holder can be installed upon requested.
- Custom versions upon requested.
- According to:

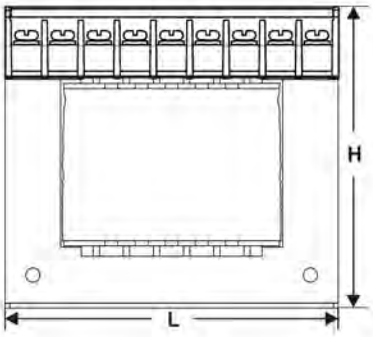





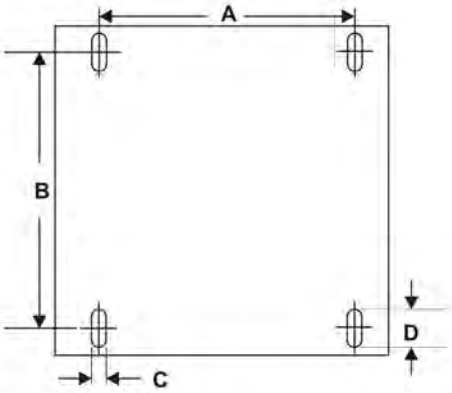

Part Number	Rated Power (VA)	Dimensions (mm) L	W	H	A	B	C	D	WT.(kg)
SPCT-01-40	40	78.00	75.00	92.00	56.00	46.00	4.80	4.80	0.80
SPCT-01-63	63	78.00	75.00	92.00	56.00	46.00	4.80	4.80	1.20
SPCT-01-100	100	84.00	90.00	98.00	64.00	62.00	4.80	4.80	2.10
SPCT-01-160	160	96.00	90.00	108.00	84.00	73.50	5.80	5.80	2.60
SPCT-01-250	250	96.00	102.00	108.00	84.00	85.00	5.80	5.80	3.50
SPCT-01-400	400	120.00	105.00	125.00	90.00	85.00	7.00	9.00	4.80
SPCT-01-500	500	120.00	120.00	125.00	90.00	98.00	7.00	9.00	5.90
SPCT-01-630	630	150.00	110.00	150.00	122.00	90.00	7.00	9.00	7.00
SPCT-01-800	800	150.00	125.00	150.00	122.00	105.00	7.00	9.00	9.20
SPCT-01-1000	1000	168.00	130.00	160.00	138.00	105.00	7.00	9.00	10.50
SPCT-01-1600	1600	168.00	145.00	160.00	138.00	116.00	7.00	9.00	16.70
SPCT-01-2000	2000	180.00	155.00	170.00	130.00	130.00	9.00	11.00	21.00
SPCT-01-2500	2500	192.00	170.00	190.00	145.00	130.00	9.00	11.00	23.00
SPCT-01-3000	3000	192.00	185.00	190.00	145.00	145.00	9.00	11.00	30.00
SPCT-01-3500	3500	228.00	175.00	220.00	180.00	125.00	9.00	11.00	33.00
SPCT-01-4000	4000	228.00	180.00	220.00	180.00	130.00	9.00	11.00	37.00
SPCT-01-5000	5000	228.00	190.00	220.00	180.00	140.00	9.00	11.00	46.00
SPCT-01-6000	6000	264.00	190.00	250.00	200.00	140.00	9.00	11.00	55.00
SPCT-01-7000	7000	264.00	200.00	250.00	200.00	150.00	9.00	11.00	62.00
SPCT-01-8000	8000	264.00	205.00	250.00	200.00	155.00	9.00	11.00	70.00

EVER BRIGHT (ZHUHAI) ELECTRONIC CO.,LTD.
WWW.EVER-BRIGHT.INFO