
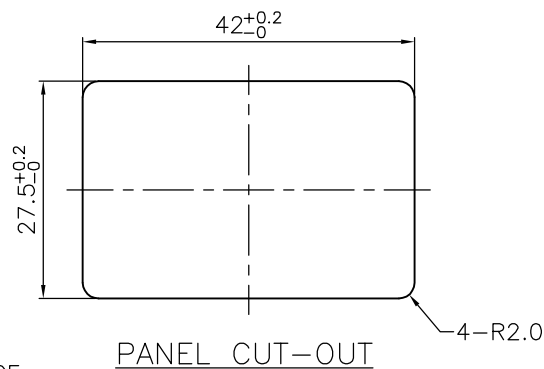
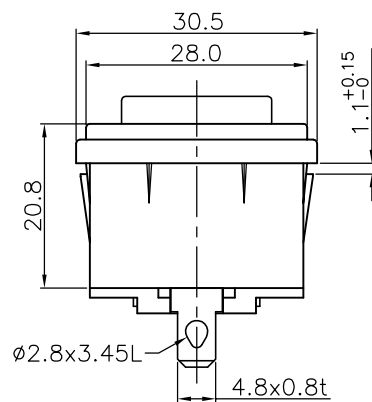


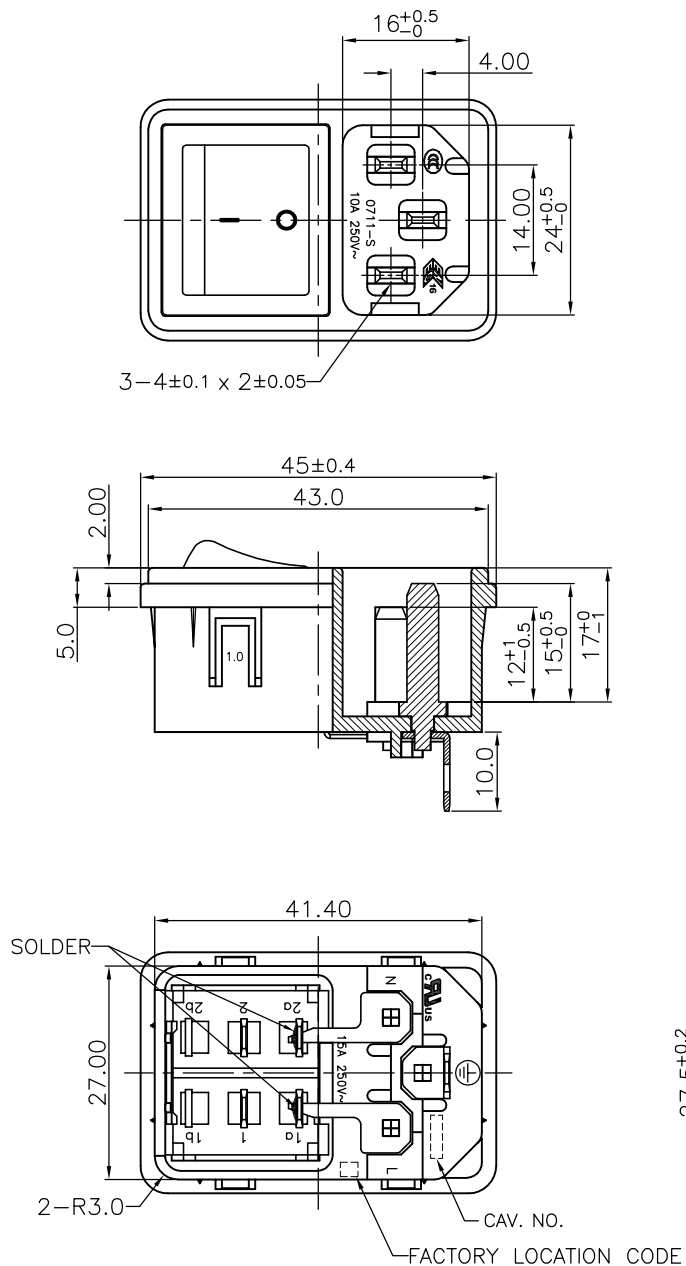

SPECIFICATION

A: MATERIAL:

1. HOUSING: PC, UL 94V-0
2. TERMINAL: COPPER ALLOY, TIN PLATED


B: CHARACTERISTICS:

1. RATING: 10A 250V~ EUROPE
15A 250V~ NORTH AMERICA
2. INSULATION RESISTANCE: 100MΩ MIN, AT 500V DC
3. ELECTRIC STRENGTH: AC 2,000V FOR ONE MINUTE

C: APPROVALS:

CUL, ENEC & CCC

D: DIAGRAM:



E: ORDERING INFORMATION:

P/N	DIM.X	PANEL THICKNESS	SWITCH'S TERMINAL
0711-SPQ10-H1	1.10mm	1.0 mm	

PANEL CUT-OUT

5			
4			
3			
2	2021.08.04	DGR21005	更改安规刻字
1	2017.04.05	RELEASE	NEW REVISION
REV	DATE	DOCUMENT	DESCRIPTION

 深圳易凯达科技有限公司 WIN-KARE TECHNOLOGY CO.,LTD.				PART NO.: 0711-SPQ10-H1		NAME: AC INLET 3P+SWITCH (SNAP-IN)	
TOLERANCE UNLESS OTHERWISE MARKED DIMENSION: ANGULAR: .000: ±0.1 .00 : ±0.2 .0 : ±0.3				MATERIAL: SEE ABOVE		SPEC.: IEC 60320-1, C14	
APPROVED		CHECKED		DESIGNER		NOTE:	
A 4			UNIT mm	SCALE 1 : 1	SHEET 1 of 1		DOC.#: S711-0097