

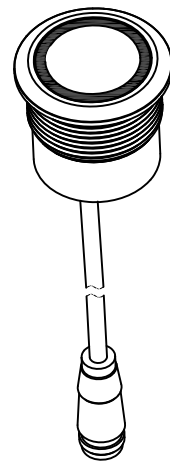



惠州宏利源电器有限公司
HONYONE ELECTRICAL APPLIANCE CO.,LTD

PTM19

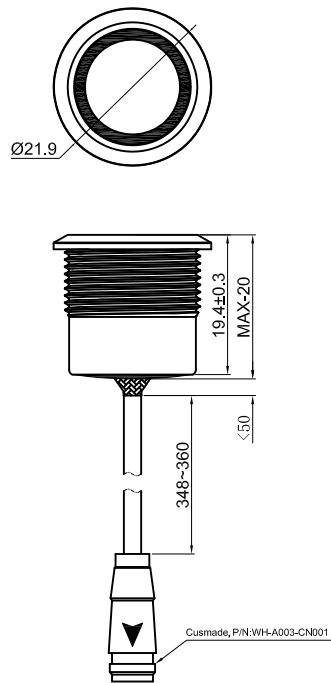

CIRCUIT






SPECIFICATIONS

Rating: 50mA 12VDC
Total Travel: 0.8-1.0mm;
Operating Force: 300-400gf;
Degree of protction: IP67;
Mechanical Life: 1000, 000 cycles;
LED Life: 50, 000 hours;
LED Rating: 20mA 12VDC

Switch the material:

- 1.Shell material: Aluminium Alloy;
- 2.Key: PC;
- 3.Back shroud: PA66;
- 4.Supporting plate: POM;

PAD LAYOUT

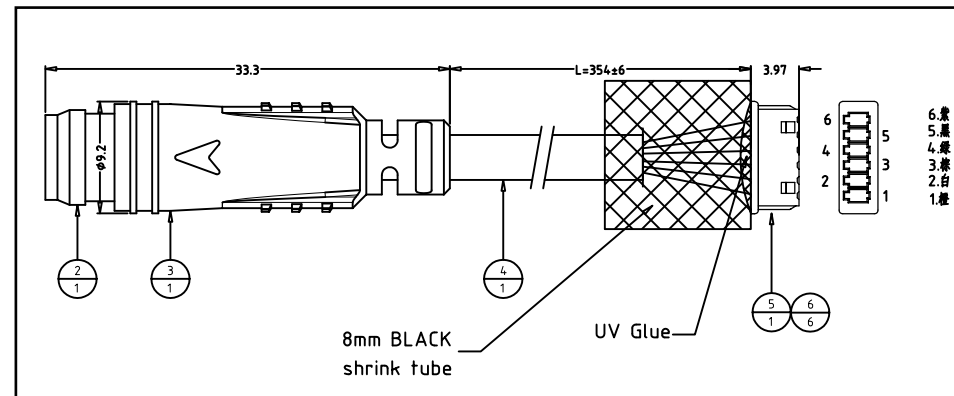

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位 DIMENSION UNIT	mm.	
				视 角		比 例 尺	NONE	日 期	2019.06.15	品 名 TITLE	图 号 DRAWING NO	
				VIEWING ANGLE		SCALE		DATE				
A0	New Issue	2019.06.15	N/A	核 准	Richard	核 对	Sinc	绘 图	Mashaofei	PTM19-11M-F-RRGB-H2	PTM19-11M-F-RRGB-H2_CP_A0	
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY				

File Code: HY-WI-E-03A