

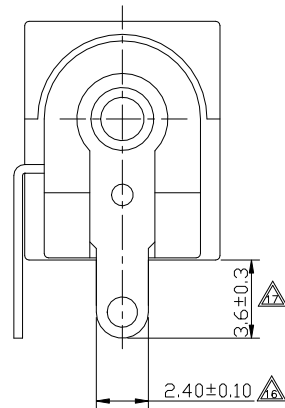


F
E
D
C
B
A


12'06/01

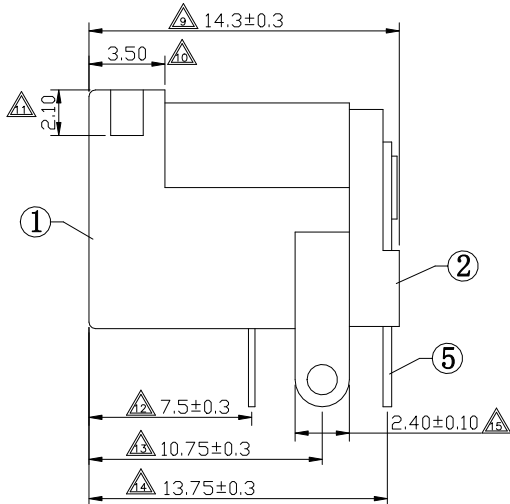


Level-1 Controlled Substances are banned

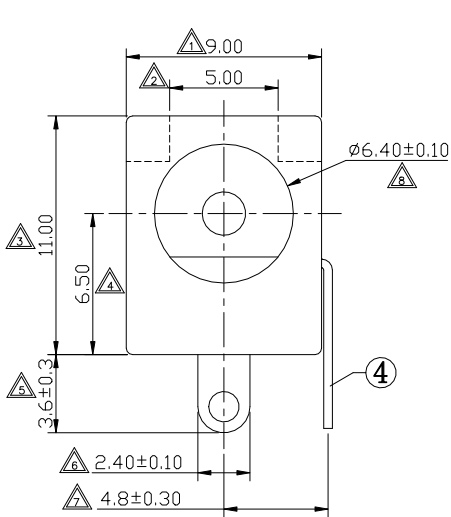


P. C. B LAYOUT
TOP VIEW

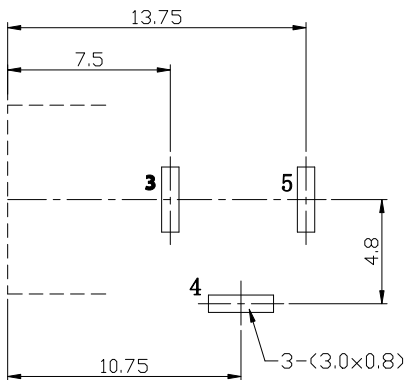

SCHEMATIC



PIN	ø2.0	ø2.5
APPD.		

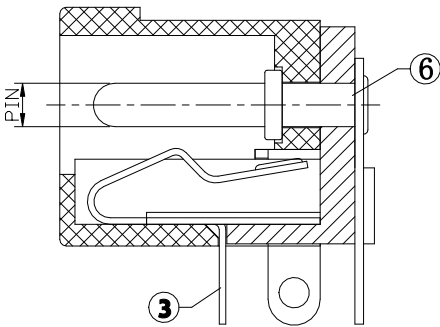

SPECIFICATION

- 1.Rating : DC 30V 1.0A;
- 2.Contact resistance: $\leq 0.03\Omega$;
- 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles.
- 7.Marked $\triangle$ are important dimensions.

6	PIN	1	BRASS	—	Ni-Plating
5	FLAT FOOT	1	BRASS	—	Sn-Plating
4	CURVE PIECE	1	BRASS	—	Sn-Plating
3	SPRING PIECE	1	BRONZE	—	Sn-Plating
2	COVER	1	PBT	—	—
1	HOUSING	1	PBT	—	—
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			 盛聰电子有限公司 SHENG CONG ELECTRONIC CO.,LTD		
General		Angle			
X ± 0.50		X °± 3°			
XX ± 0.30		XX °± 2°			
XXX ± 0.20		XXX °± 1°			
XXXX ± 0.10					
PROJ: 			SCALE: 3:1	UNIT:mm	SIZE: A4
					SHEET: 1 OF 1